



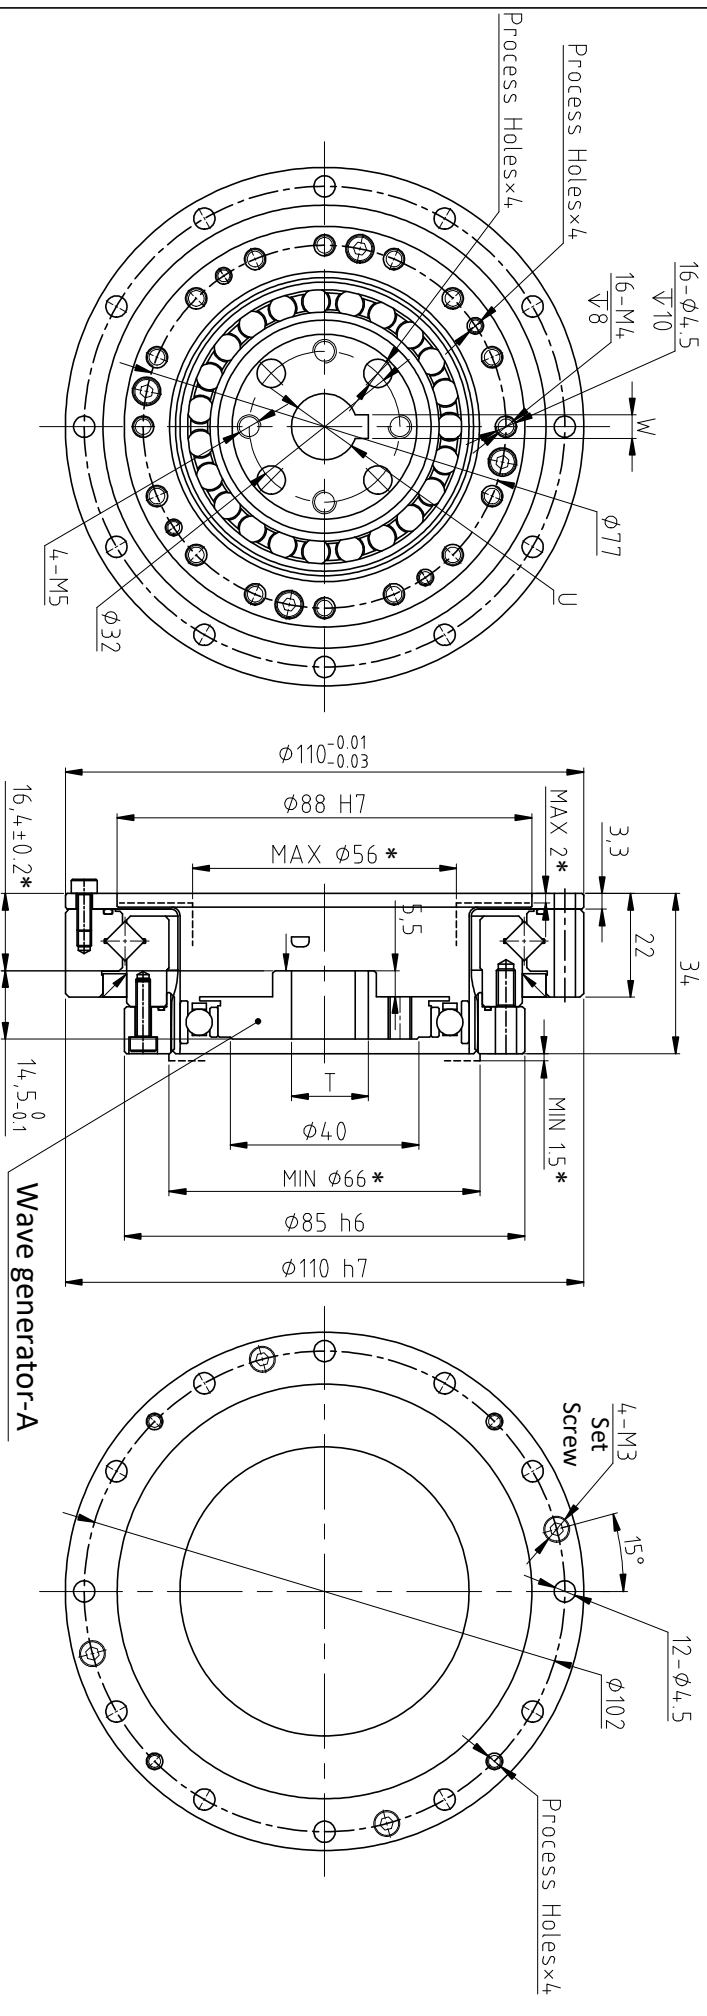

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.



FHG-25-XX-U-I													Model		Reduction ratio		Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		weight		Desian life								
MODEL				U		T		W		25										50		80		100		120		160		FHG-I:1.22										Hour	
Wave generator-A φ11				φ11H7		12.8 ^{±1}		4JS9/P9		Nm		kgfm		Nm		kgfm		Nm		kgfm		Nm		kgfm		r/min		r/min		Arc Sec		kg		≥10000							
										51		5.2		127		13		72		7.3		242		25		5600		3500		≤20		≥15000									
										82		8.4		178		18		113		12		332		34		5600		3500		≤20		≥15000									
										87		8.9		207		21		140		14		369		38		5600		3500		≤20		≥15000									
										87		8.9		217		22		140		14		395		40		5600		3500		≤20		≥15000									
Wave generator-A φ14				φ14H7		16.3 ^{±1}		5JS9/P9		87		8.9		229		23		140		14		408		42		5600		3500		≤20		≥15000									