


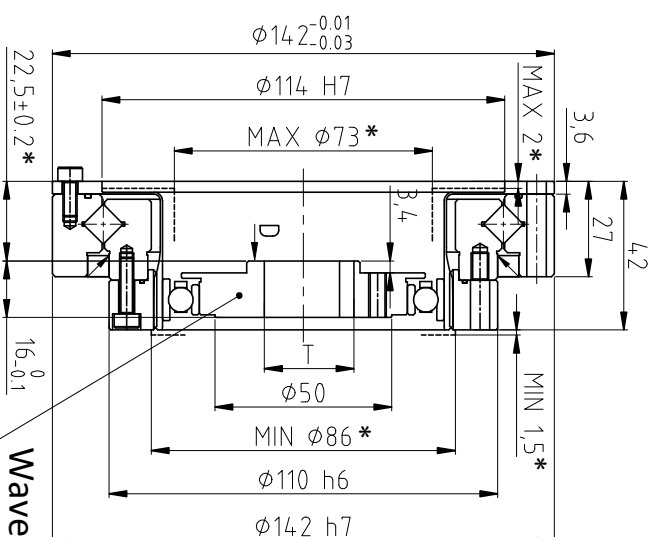


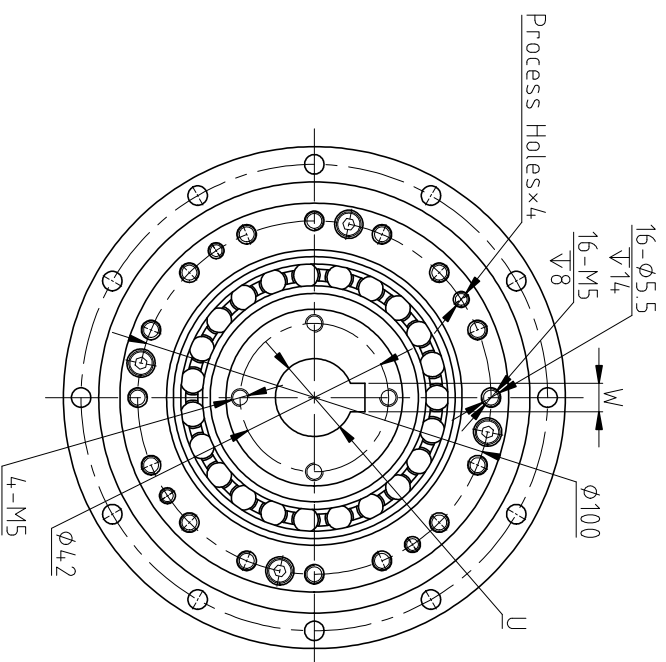

Wave generator-A

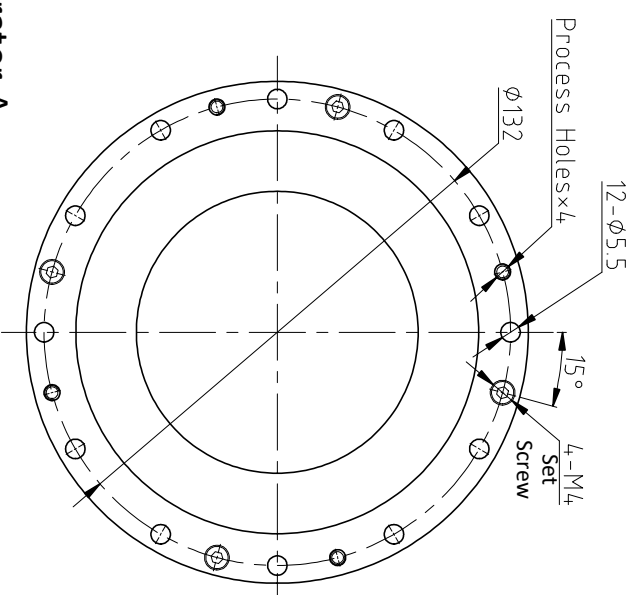

D Direction



Laifual

Technical requirements:
 1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FHG-32-XX-U-I																					
MODEL	U	T	W	Model	Reduction ratio	Rated torque at2000r/min Input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	weight	Desian life	
						Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg				Hour
Wave generator-A φ14	φ14H7	16.3 ^{±1}	5JS9/P9	32	50	99	10	281	29	140	14	497	51	4800	3500	≤20		≥15000			
Wave generator-A φ19	φ19H7	21.8 ^{±1}	6JS9/P9		80	153	16	395	40	217	22	738	75	4800	3500	≤20		≥15000			
					100	178	18	433	44	281	29	841	86	4800	3500	≤20		FHG-1:2.5:4	≥15000		
					120	178	18	459	47	281	29	892	91	4800	3500	≤20		≥15000			
Wave generator-A φ22	φ22H7	25.3 ^{±1}	8JS9/P9		160	178	18	484	49	281	29	892	91	4800	3500	≤20		≥15000			