


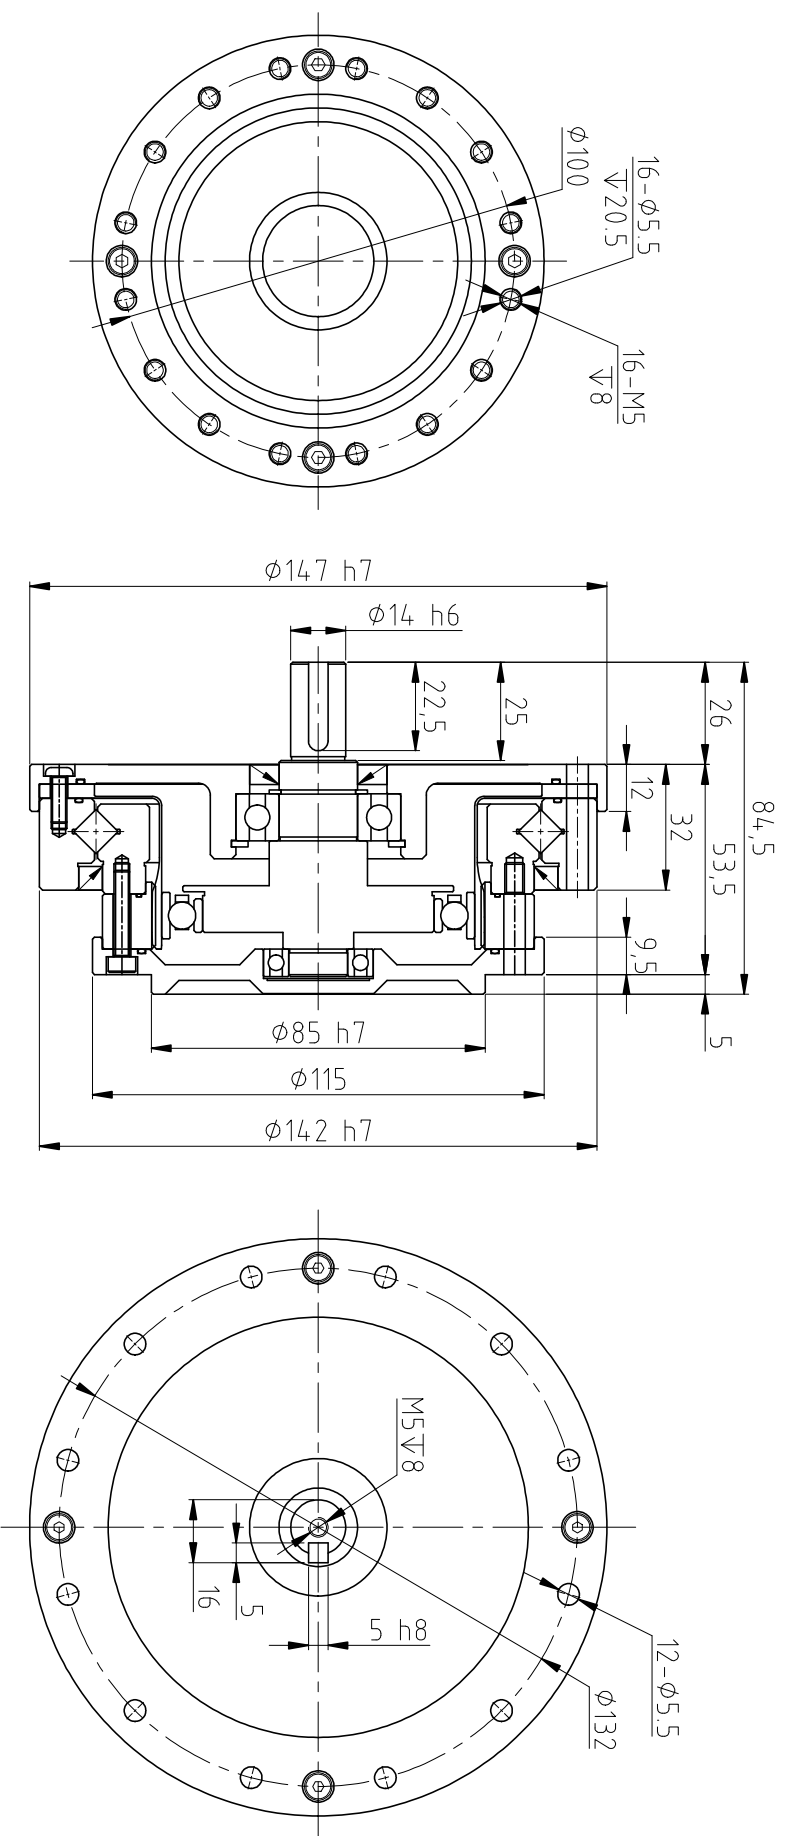

- Technical requirements:
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laifual

FHG-32-XX-U-IV	32	Model	Reduction ratio	Rated torque at2000r/min Input	Permissible peak torque at start and stop	Permissible maximum value for average load torque	Permissible maximum momentary torque	Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life		
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg	Hour
		50	99	10	281	29	140	14	497	51	4800	3500	≤20	≥15000
		80	153	16	395	40	217	22	738	75	4800	3500	≤20	≥15000
		100	178	18	433	44	281	29	841	86	4800	3500	≤20	≥15000
		120	178	18	459	47	281	29	892	91	4800	3500	≤20	≥15000
		160	178	18	484	49	281	29	892	91	4800	3500	≤20	≥15000