



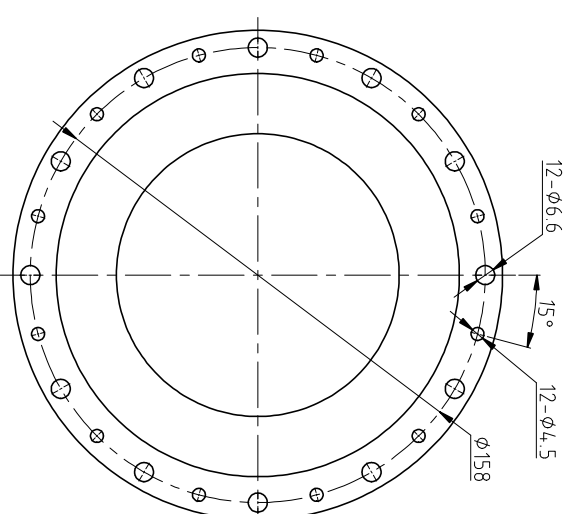

Technical requirements:

1. Please use the grease specified by our company
2. The * in the drawing is the installation reference size, please follow the installation size requirements.
3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.



Laitua

FHG-40-XX-C-I																								
MODEL		U	T	W																				
Wave generator-A Ø14	Ø14H7	16.3 ^{±1}	5JS9/P9	Model	Reduction ratio	Rated torque at2000r/min Input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life						
						Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm											
						50	178	18	523	53	255	26	892						91	4000	3500	Arc Sec	kg	Hour
						80	268	27	675	69	369	38	1270						130	4000	3500	≤20	≥15000	≥15000
						100	345	35	738	75	484	49	1400						143	4000	3500	≤20	FHG-C:1.87	≥15000
Wave generator-A Ø19	Ø19H7	21.8 ^{±1}	6JS9/P9	40	100	345	35	738	75	484	49	1400	143	4000	3500	≤20	≥15000	≥15000						
					120	382	39	802	82	586	60	1530	156	4000	3500	≤20	≥15000	≥15000						
					160	382	39	841	86	586	60	1530	156	4000	3500	≤20	≥15000	≥15000						
Wave generator-A Ø22	Ø22H7	25.3 ^{±1}	8JS9/P9	40	100	345	35	738	75	484	49	1400	143	4000	3500	≤20	≥15000	≥15000						
					120	382	39	802	82	586	60	1530	156	4000	3500	≤20	≥15000	≥15000						
					160	382	39	841	86	586	60	1530	156	4000	3500	≤20	≥15000	≥15000						