
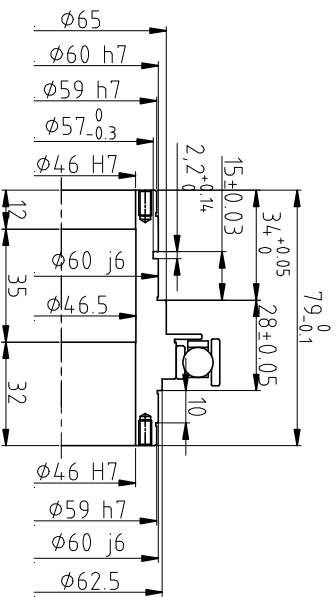
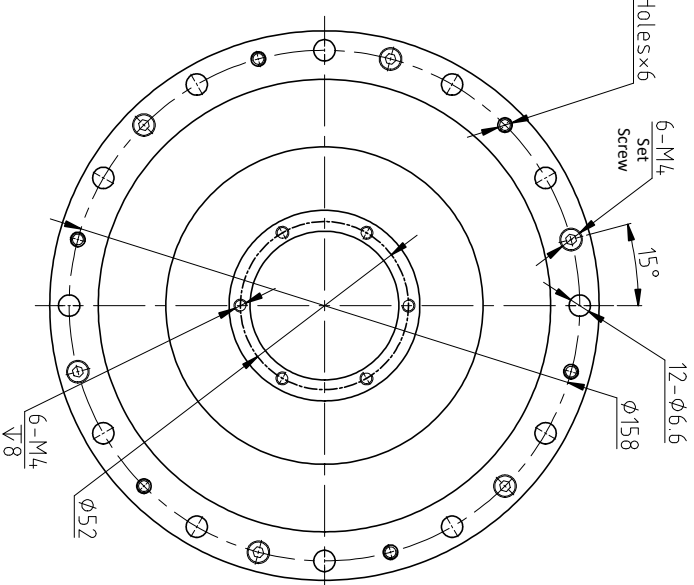
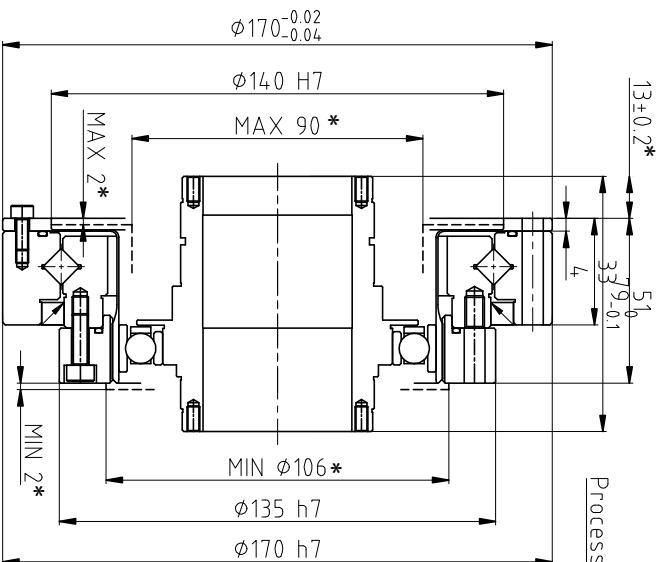


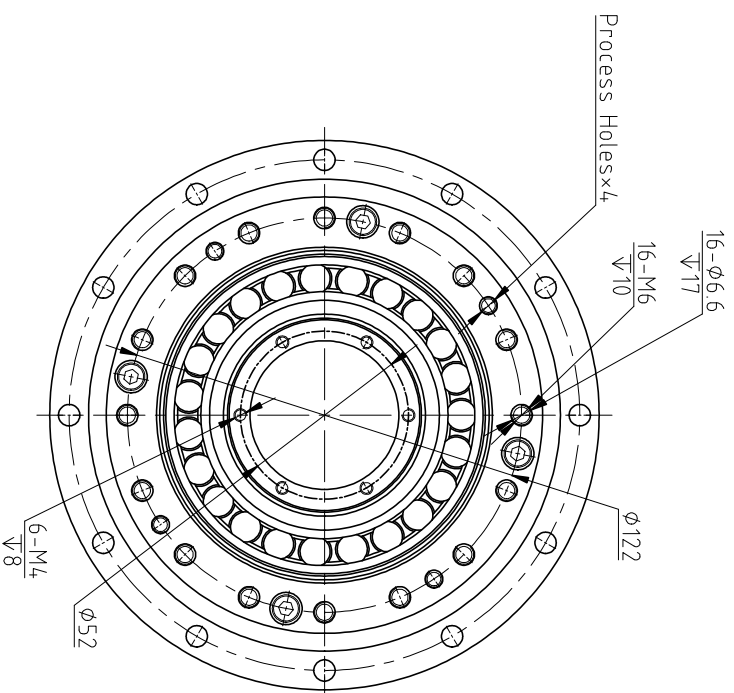

Technical requirements:
 1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Latitua

Model	Reduction ratio	Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash Arc Sec	weight kg	Desian life Hour
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min		r/min				
40	50	178	18	523	53	255	26	892	91	4000		3500		≤20		≥10000
	80	268	27	675	69	369	38	1270	130	4000		3500		≤20		≥15000
	100	345	35	738	75	484	49	1400	143	4000		3500		≤20		≥15000
	120	382	39	802	82	586	60	1530	156	4000		3500		≤20		≥15000
	160	382	39	841	86	586	60	1530	156	4000		3500		≤20		≥15000

FHG-40-XX-U-V

FHG-V:2.7