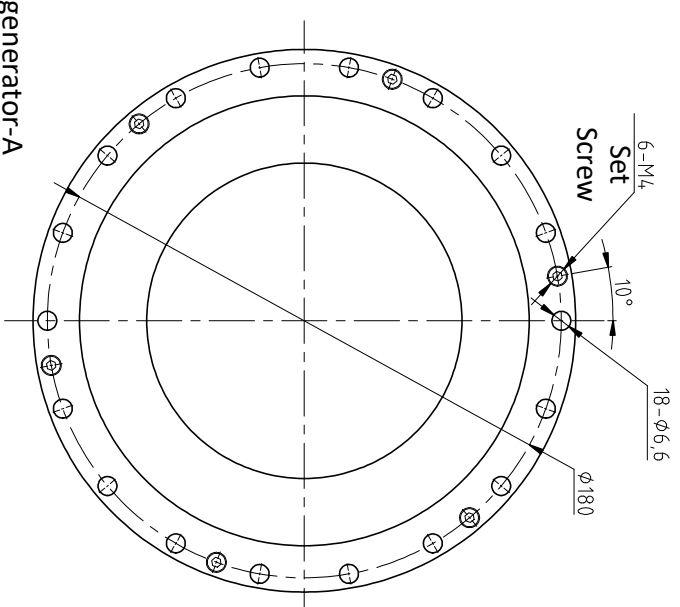
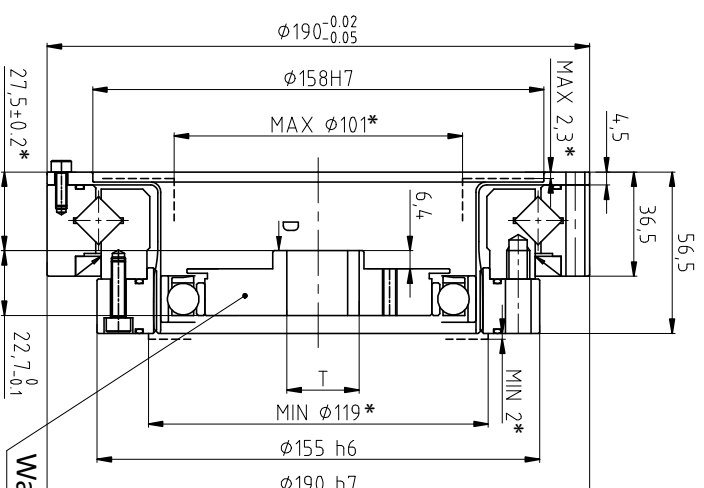
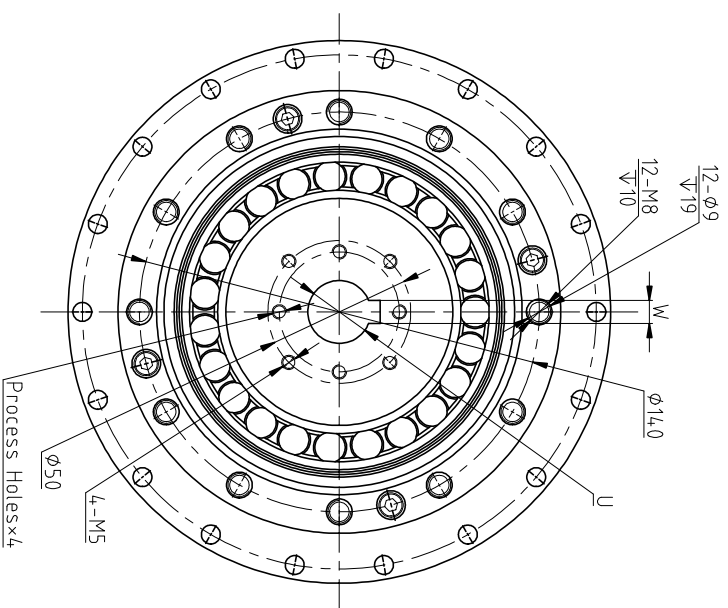


- Technical requirements:
- 1.Please use the grease specified by our company
 - 2.The * in the drawing is the installation reference size, please follow the installation size requirements.
 - 3.If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FHG-45-XX-U-I																					
MODEL	U	T	W																		
Wave generator-A φ19	φ19H7	21.8 ^{±1}	6JS9/P9	Model	Reduction ratio	Rated torque at2000r/min input		Permissible peak torque and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life			
						Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec			kg	Hour	
						80	407	41	918	94	507	52	1651	168	3800	3500			≤20		
						100	456	47	982	100	650	66	2041	208	3800	3500			≤20		
Wave generator-A φ22	φ22H7	25.3 ^{±1}	8JS9/P9	45	120 <td>523</td> <td>53</td> <td>1070</td> <td>109</td> <td>806</td> <td>82</td> <td>2288</td> <td>233</td> <td>3800</td> <td>3500</td> <td>≤20</td> <th rowspan="2">FHG-1:6.5</th> <th rowspan="2">≥15000</th>	523	53	1070	109	806	82	2288	233	3800	3500	≤20	FHG-1:6.5	≥15000			

Laitival