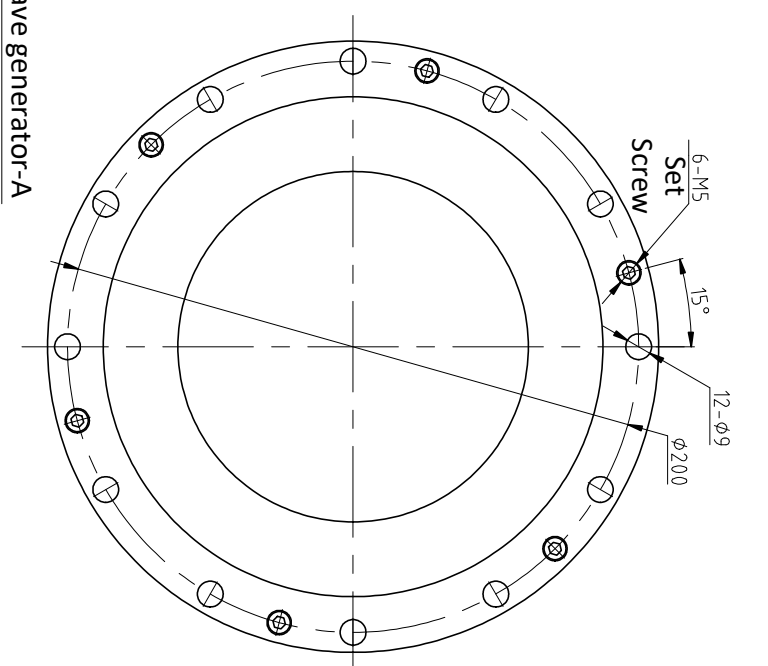
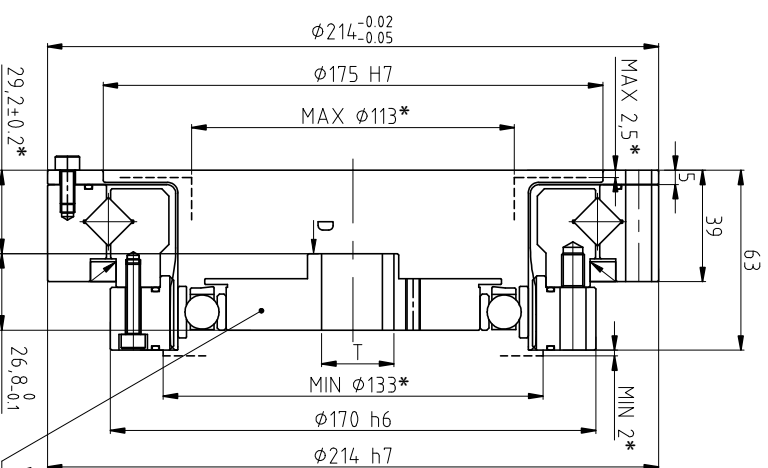
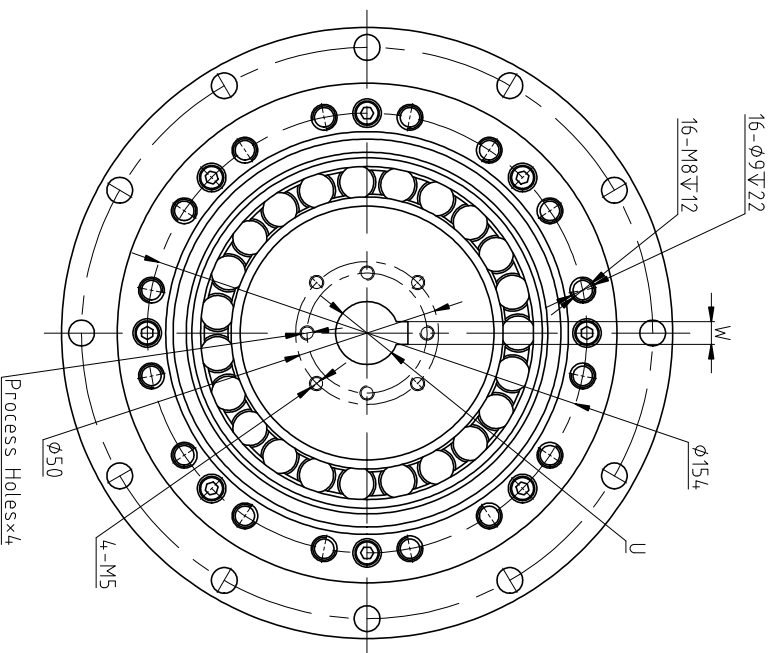


- Technical requirements:
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FHG-50-XX-U-I																				
MODEL	U	T	W																	
Wave generator-A φ19	φ19H7	21.8 ^{±1}	6JS9/P9	Model	Reduction ratio	Rated torque peak torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	weight	Desian life
						Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg	Hour		
					80	484	49	1223	125	675	69	2418	247	3500	3500	≤20				
					100	611	62	1247	130	866	88	2678	273	3500	3500	≤20				
					120	688	70	1404	143	1057	108	2678	273	3500	3500	≤20				
Wave generator-A φ22	φ22H7	24.8 ^{±1}	6JS9/P9	50															FHG-1:9.6	≥15000
		25.3 ^{±1}	8JS9/P9																	≥15000

Laifuai