

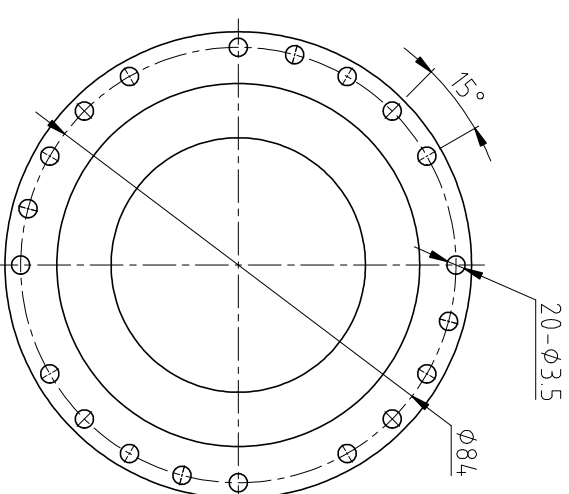
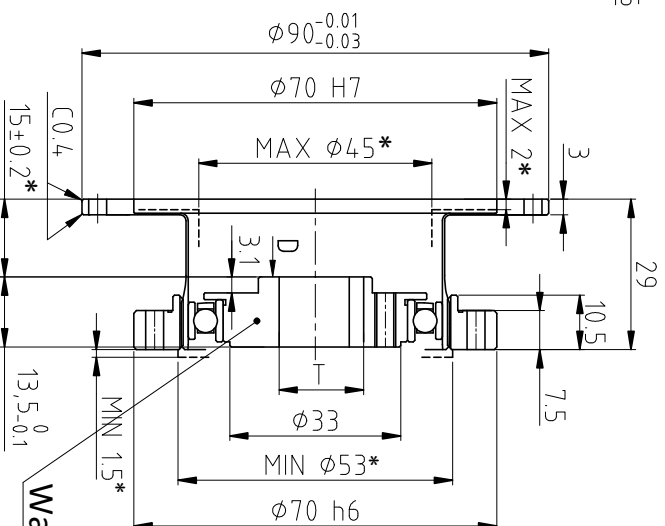


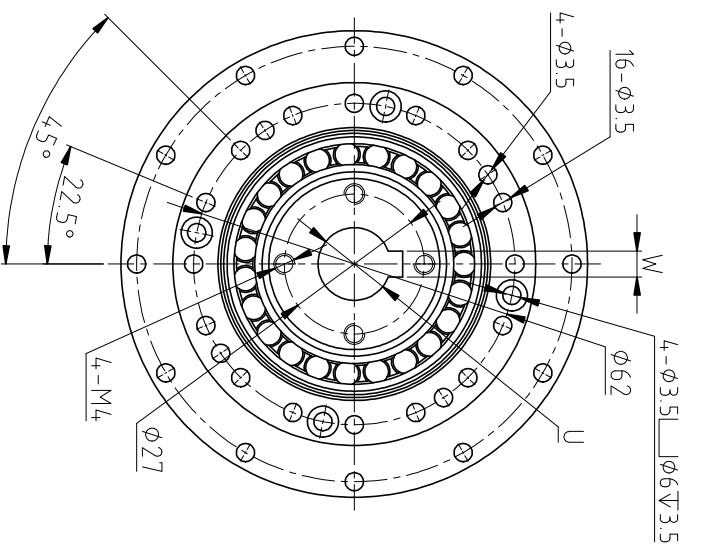

Wave generator-A

D Direction



- Technical requirements:**
- 1.Please use the grease specified by our company
 - 2.The * in the drawing is the installation reference size, please follow the installation size requirements.
 - 3.If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laifuai

FHT-20-XX-C-I				Model	Reduction ratio	Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	weight	Desian life	
MODEL	U	T	W			Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg				Hour
Wave generator-A Ø8	Ø8H7	9.4 ^{±1}	3JS9/P9	20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤20	≥10000	≥15000	≥15000		
Wave generator-A Ø11	Ø11H7	12.8 ^{±1}	4JS9/P9		80	34	3.5	74	7.5	47	4.8	127	13	6500	3500	≤20	FHT-C.0.27	≥15000	≥15000		
					100	40	4.1	82	8.4	49	5	147	15	6500	3500	≤20					
					120	40	4.1	87	8.9	49	5	147	15	6500	3500	≤20					
Wave generator-A Ø14	Ø14H7	16.3 ^{±1}	5JS9/P9	160	40	4.1	92	9.4	49	5	147	15	6500	3500	≤20	≥15000	≥15000	≥15000			