



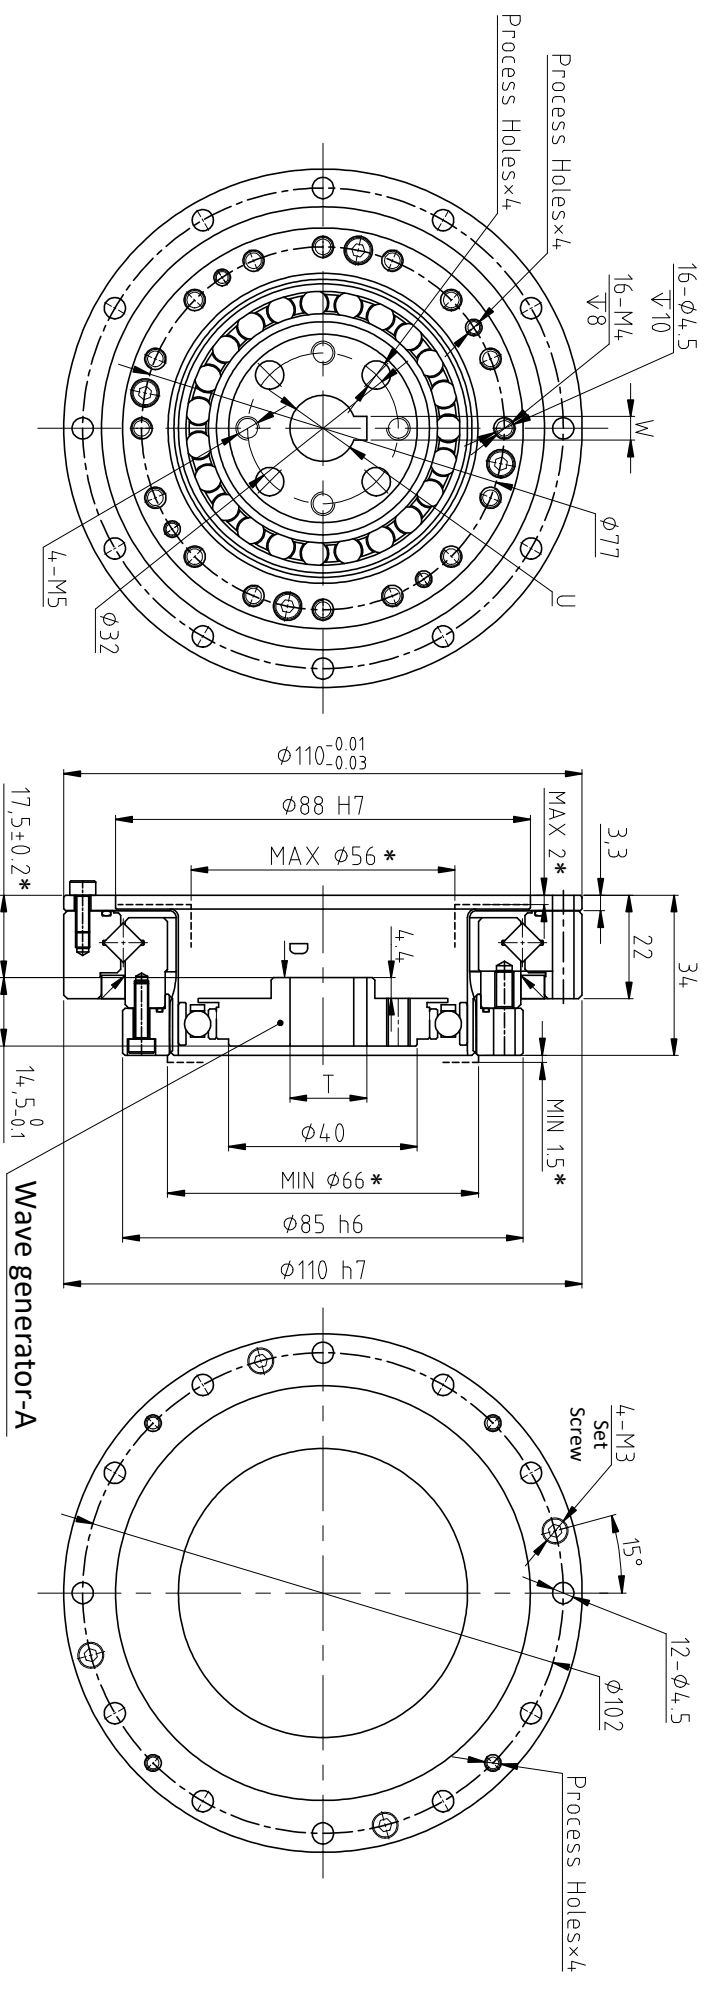

Technical requirements:

1. Please use the grease specified by our company
2. The * in the drawing is the installation reference size, please follow the installation size requirements.
3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.



Laifuneal

FHT-25-XX-U-1												Model		Reduction ratio		Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		weight		Desian life					
MODEL				U		T		W		25																											
Wave generator-A φ11										50		39		4		98		10		55		5.6		186		19		5600		3500		≤20		FHT-1.1.22		≥10000	
										80		63		6.4		137		14		87		8.9		255		26		5600		3500		≤20				≥15000	
										100		67		6.8		157		16		108		11		284		29		5600		3500		≤20				≥15000	
										120		67		6.8		167		17		108		11		304		31		5600		3500		≤20				≥15000	
										160		67		6.8		176		18		108		11		314		32		5600		3500		≤20				≥15000	
Wave generator-A φ14										160		67		6.8		176		18		108		11		314		32		5600		3500		≤20		≥15000			