

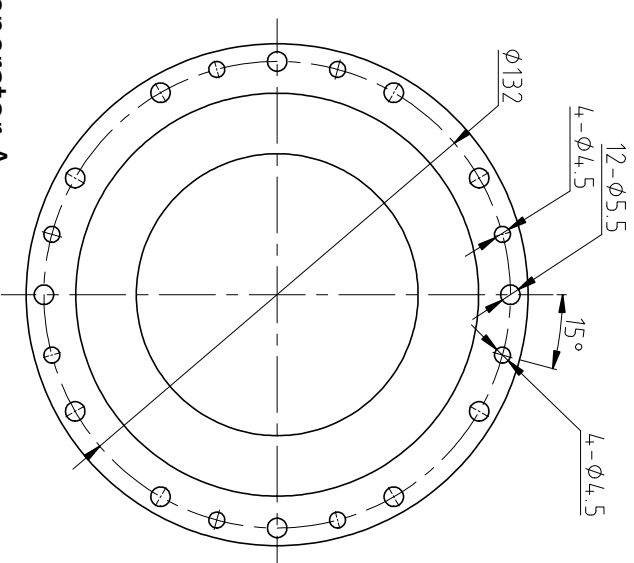
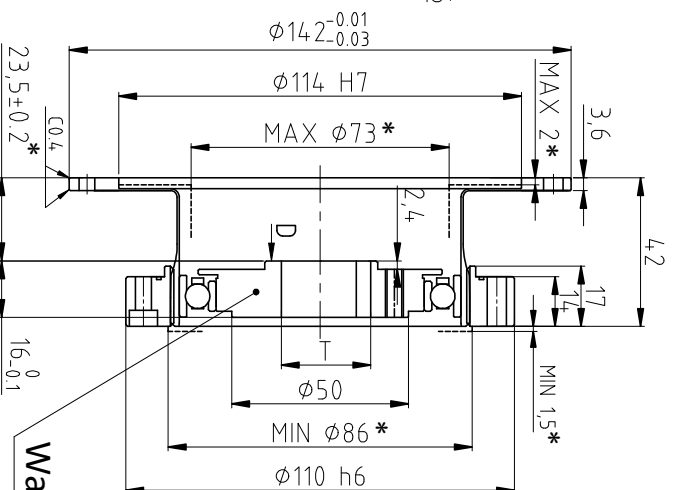


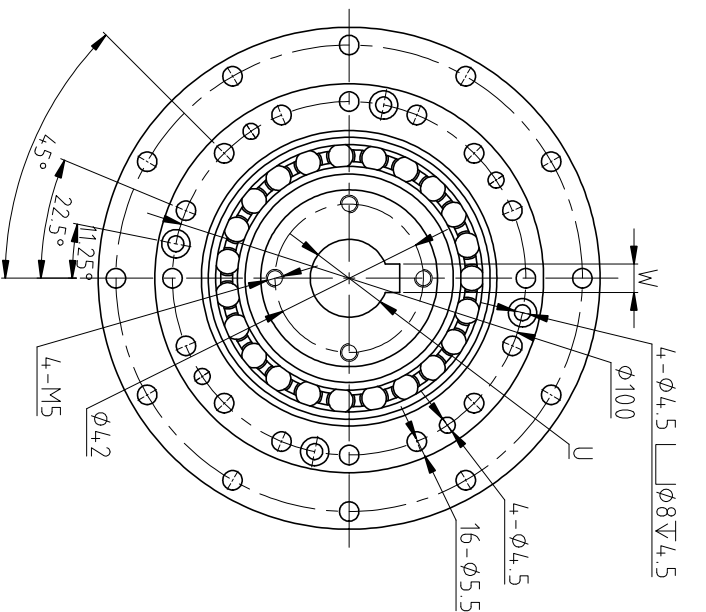

D Direction



- Technical requirements:
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Latitua

FHT-32-XX-C-I

FHT-32-XX-C-1																								
MODEL		U	T	W																				
Wave generator-A $\phi 14$	$\phi 14H7$	$16.3^{+0.1}$	5JS9/P9	Model	Reduction ratio	Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life						
						Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm											
						50	76	7.8	216	22	108	11	382						39	4800	3500	≤ 20	kg	Hour
Wave generator-A $\phi 19$	$\phi 19H7$	$21.8^{+0.1}$	6JS9/P9	32	80	118	12	304	31	167	17	568	58	4800	3500	≤ 20		≥ 15000						
						100	137	14	333	34	261	22	647	66	4800	3500	≤ 20	FHT-C-1	≥ 15000					
						120	137	14	353	36	261	22	686	70	4800	3500	≤ 20		≥ 15000					
						160	137	14	372	38	261	22	686	70	4800	3500	≤ 20		≥ 15000					
Wave generator-A $\phi 22$	$\phi 22H7$	$25.3^{+0.1}$	8JS9/P9	32	100	137	14	333	34	261	22	647	66	4800	3500	≤ 20		≥ 15000						
						120	137	14	353	36	261	22	686	70	4800	3500	≤ 20		≥ 15000					