


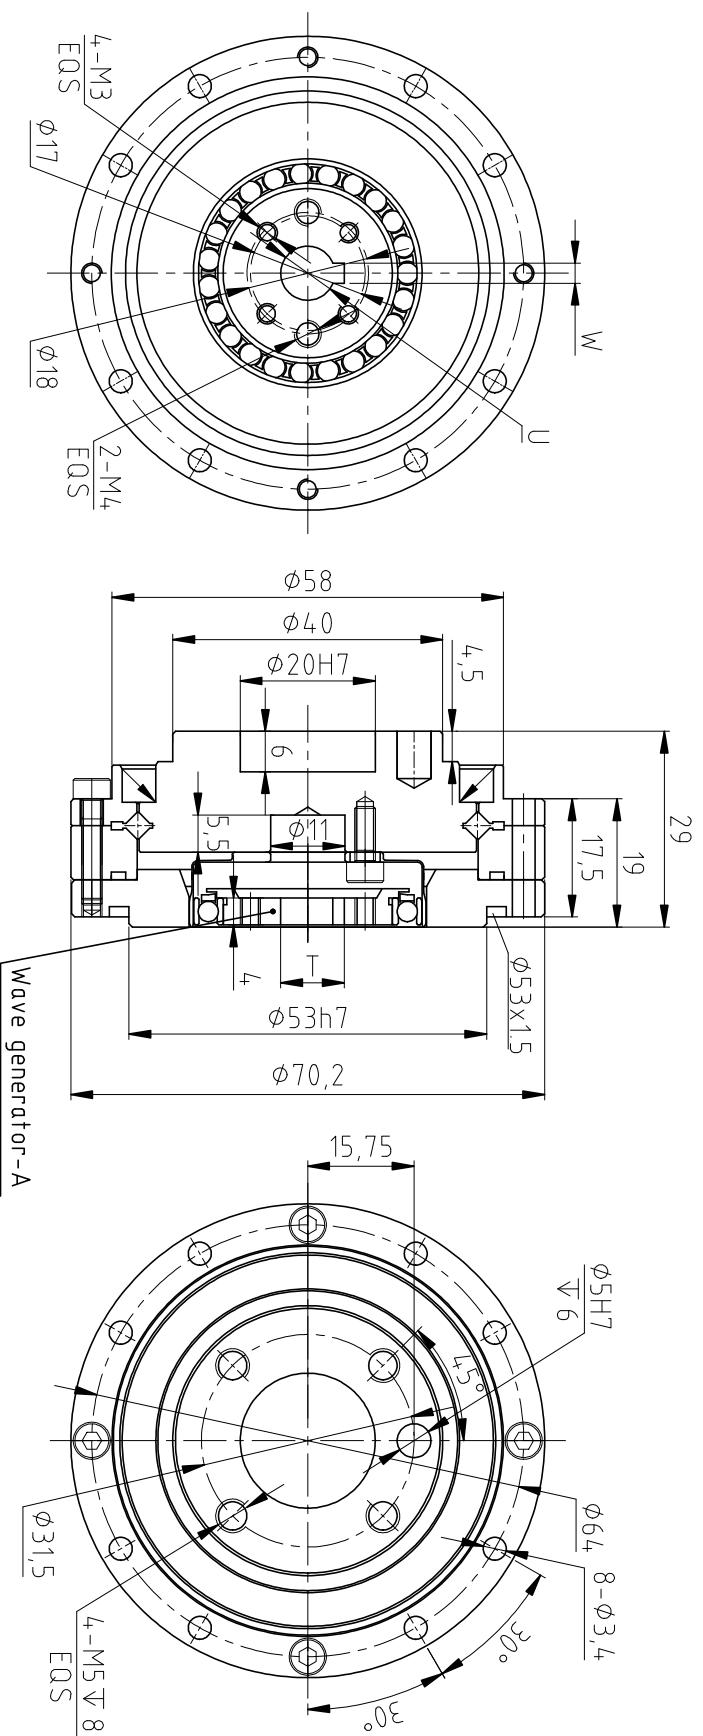

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSD-14-P-XX-U-I

MODEL		U	T	W																												
Wave generator-A $\phi 6$		$\phi 6H7$	7°_{+1}	2JS9/P9	Model		Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		Weight		Design life									
Wave generator-A $\phi 8$		$\phi 8H7$	9.4°_{+1}	3JS9/P9	14		Nm		kgfm		Nm		kgfm		Nm		kgfm		r/min		r/min		kg		Hour							
Wave generator-A $\phi 8$				50			3.7		0.38		12		1.2		4.8		0.49		24		2.4		≤ 20		≥ 9000							
Wave generator-A $\phi 8$				80			5.4		0.55		16		1.6		7.7		0.79		35		3.6		≤ 20		≥ 100000							
Wave generator-A $\phi 11$		$\phi 11H7$					100		5.4		0.55		19		1.9		7.7		0.79		35		3.6		8500		3500		≤ 20		≥ 100000	

Laitival