


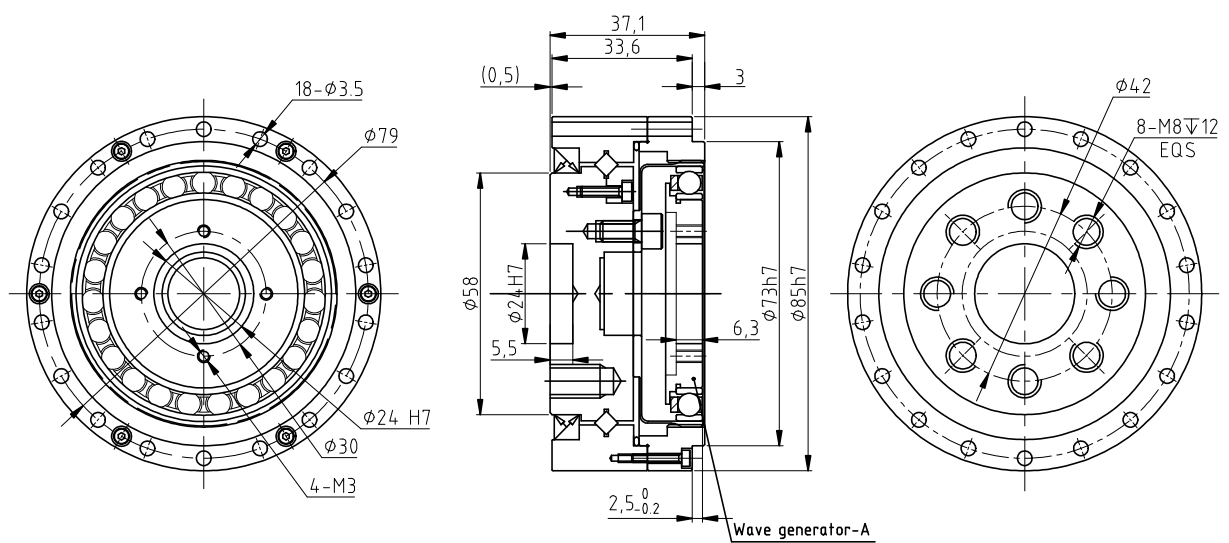

Technical requirements:

1. Please use the grease specified by our company
2. The * in the drawing is the installation reference size, please follow the installation size requirements.
3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laitual

	Model	Reduction ratio	Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life
			Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg	Hour
FSD-25-XX-U-I	25	50	27	2.8	69	7	38	3.9	127	13	5600	3500	≤ 20	FSD-I:1.25	≥ 9000
		80	44	4.5	96	9.8	60	6.1	179	18	5600	3500	≤ 20		≥ 10000
		100	47	4.8	110	11	75	7.6	184	19	5600	3500	≤ 20		≥ 10000