



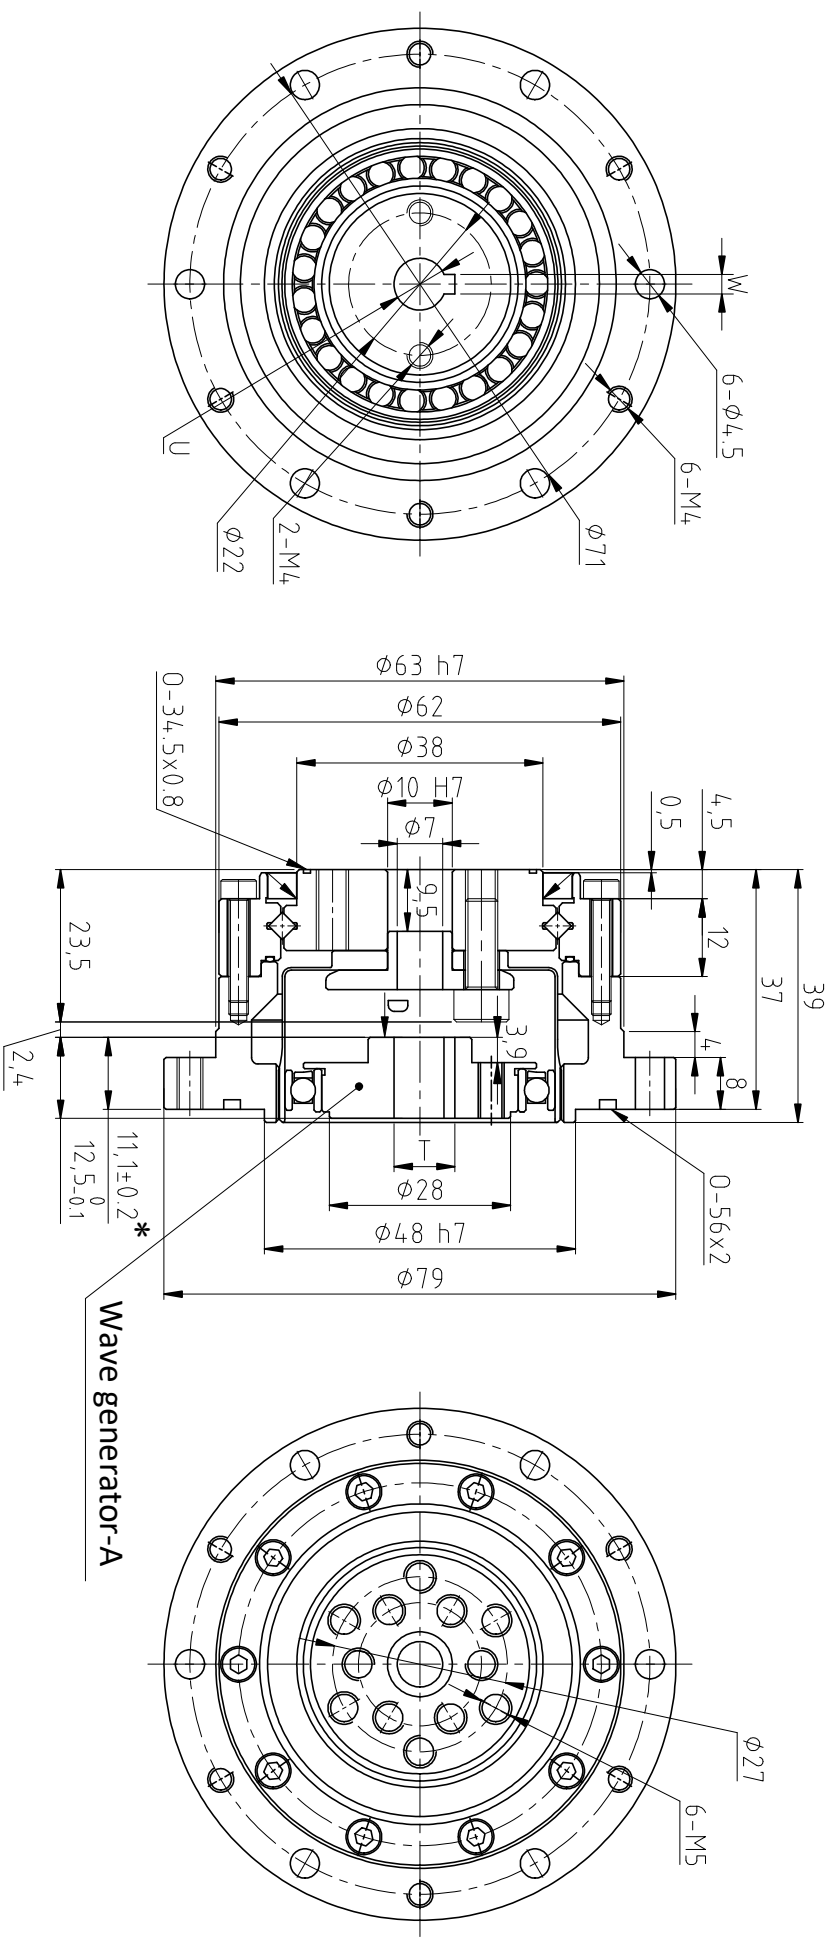

D Direction



Laifual

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSF-17-XX-U-I				Model		Reduction ratio		Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		weight		Design life	
MODEL	U	T	W	Model		Reduction ratio		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	r/min	r/min	Arc Sec	kg	Hour			
Wave generator-A φ8	φ8H7	9.4 ^{+0.1}	3JS9/P9	17		50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤20			≤20	≥15000				
						80	22	2.2	43	4.4	27	2.7	87	8.9	7300	3500	≤20			≤20	≥15000				
						100	24	2.4	54	5.5	39	4	108	11	7300	3500	≤20			≤20	≥15000				
Wave generator-A φ11	φ11H7	12.8 ^{+0.1}	4JS9/P9			120	24	2.4	54	5.5	39	4	86	8.8	7300	3500	≤20			≤20	≥15000				