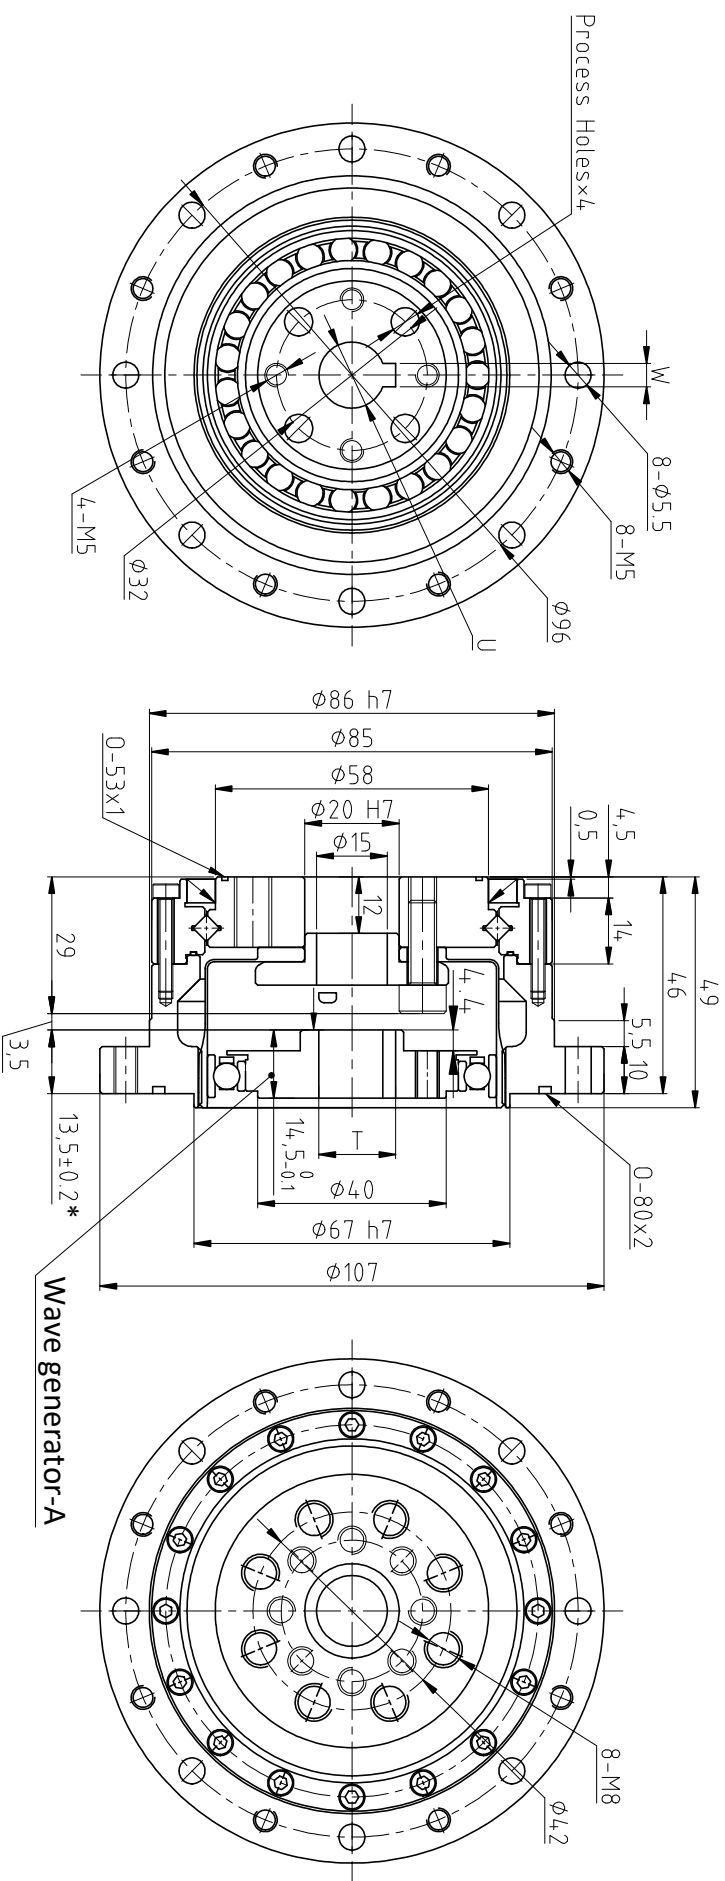


- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laifuai

FSF-25-XX-U-I				Model		Reduction Ratio		Rated torque at 2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		weight		Desian life	
MODEL	U	T	W					Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min		r/min		Arc Sec		kg		Hour	
Wave generator-A $\phi 11$	$\phi 11H7$	$12.8^{+0.1}_{-0.1}$	4JS9/P9	25				50	39	4	98	10	55	5.6	255	5600		3500		≤ 20		FSF-I:1.46		≥ 15000	
Wave generator-A $\phi 14$	$\phi 14H7$	$16.3^{+0.1}_{-0.1}$	5JS9/P9					80	63	6.4	137	14	87	8.9	284	5600		3500		≤ 20				≥ 15000	
								100	67	6.8	157	16	108	11	304	5600		3500		≤ 20				≥ 15000	
								120	67	6.8	167	17	108	11	304	5600		3500		≤ 20				≥ 15000	
								160	67	6.8	176	18	108	11	314	5600		3500		≤ 20				≥ 15000	