

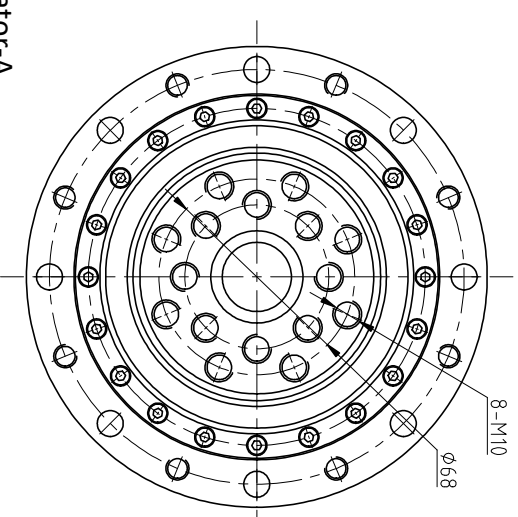
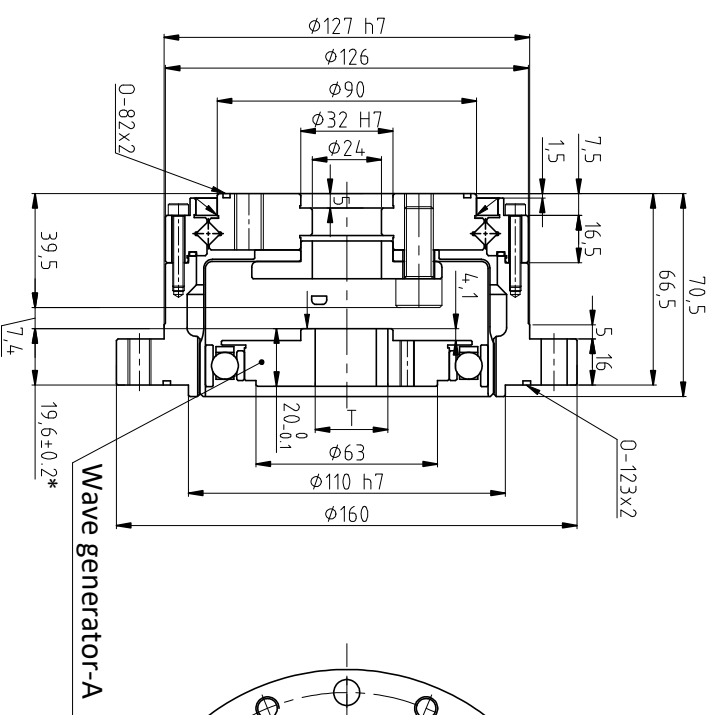


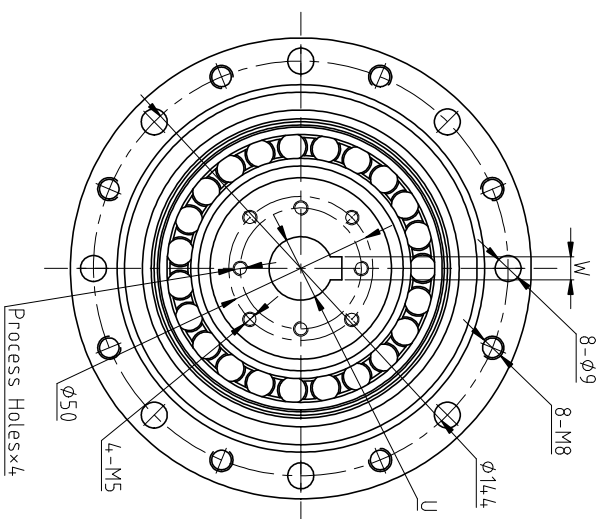

D Direction



Technical requirements:

1. Please use the grease specified by our company
2. The * in the drawing is the installation reference size, please follow the installation size requirements.
3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSF-40-XX-U-1

FSF-40-XX-U-I																						
MODEL		U	T	W	Model		Reduction ratio	Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash	weight	Desian life
								Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg			
Wave generator-A $\phi 14$		$\phi 14H7$	16.3 ^{±1}	5JS9/P9			50	137	14	402	41	196	20	686	70	4000	3500	≤20		≥10000		
Wave generator-A $\phi 19$		$\phi 19H7$	21.8 ^{±1}	6JS9/P9	40		80	206	21	519	53	284	29	980	100	4000	3500	≤20		≥15000		
							100	265	27	568	58	372	38	1080	110	4000	3500	≤20		FSF-I-4.6	≥15000	
			24.8 ^{±1}	6JS9/P9			120	294	30	617	63	451	46	1180	120	4000	3500	≤20		≥15000		
Wave generator-A $\phi 22$		$\phi 22H7$	25.3 ^{±1}	8JS9/P9			160	294	30	647	66	451	46	1180	120	4000	3500	≤20		≥15000		