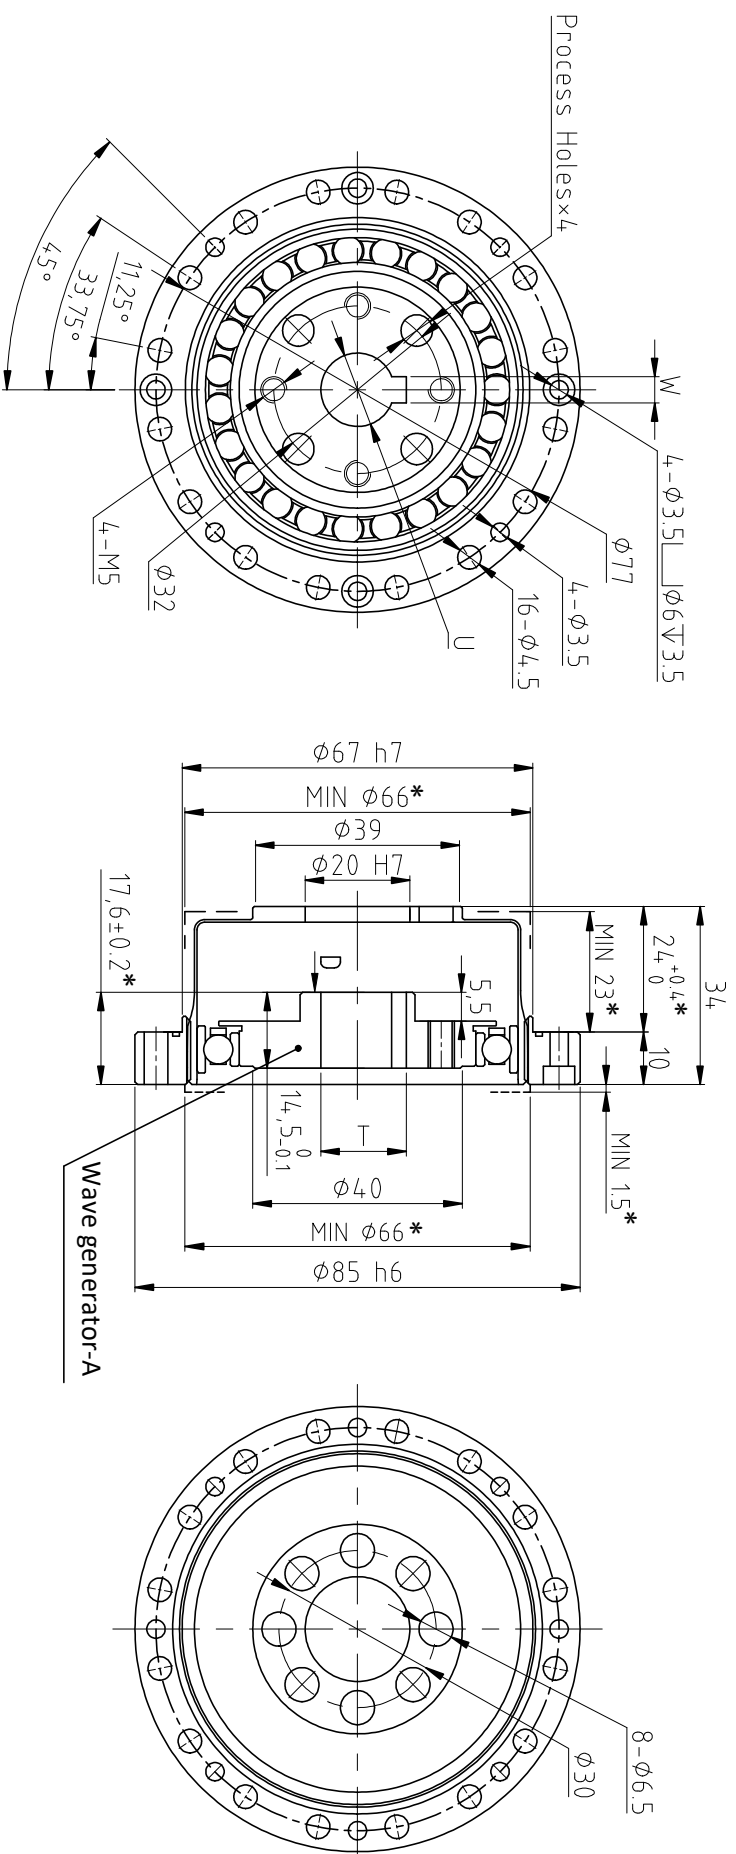


- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laifunai

FSG-25-XX-C-I				Model		Reduction ratio		Rated torque at2000r/min Input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		weight		Desian life	
MODEL		U	T	W																					
Wave generator-A φ11				φ11H7	12.8 ^{h6}	4JS9/P9	25																		
Wave generator-A φ14				φ14H7	16.3 ^{h6}	5JS9/P9																			
50		51	5.2	127	13	72	7.3	242	25	5600	3500	≤20													
80		82	8.4	178	18	113	12	332	34	5600	3500	≤20													
100				87	8.9	204	21	140	14	369	38	5600	3500	≤20	FSG-C:0.42										
120				87	8.9	217	22	140	14	395	40	5600	3500	≤20											
160				87	8.9	229	23	140	14	408	42	5600	3500	≤20											