

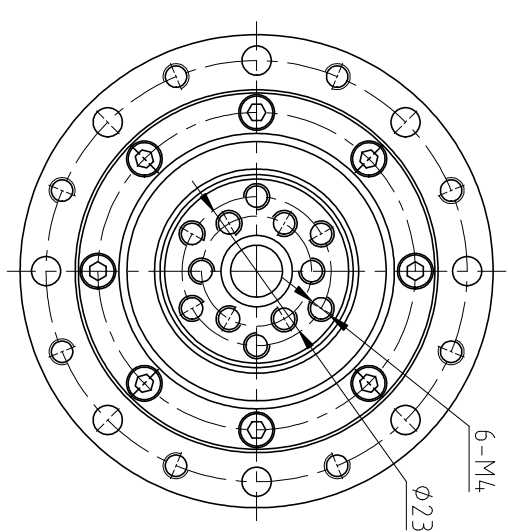
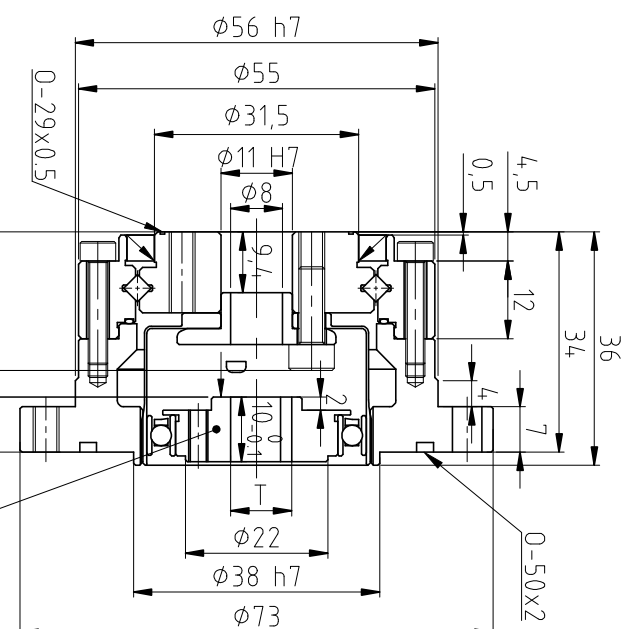


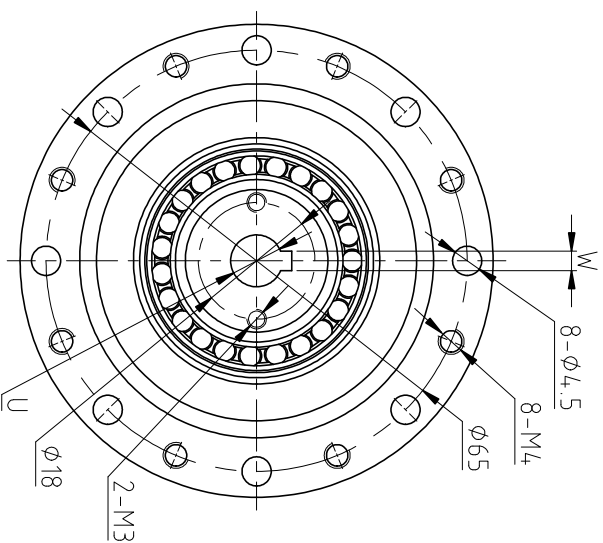


D Direction



4,1(Wave generator-A)
2,1(Wave generator-B)

8,5 $\pm$ 0.2* (Wave generator-A)
10.5 $\pm$ 0.2* (Wave generator-B)

Wave generator-B

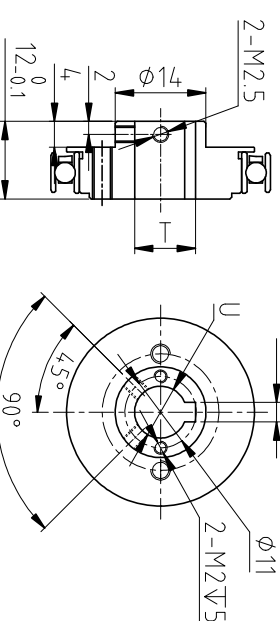

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FSS-14-XX-U-I

FSS-14-XX-U-I																	
MODEL				Model	Reduction ratio	Rated torque at2000r/min input	Permissible peak torque at start and stop	Permissible maximum value for average load torque	Permissible maximum momentary torque	Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	Weight	Design life			
	U	T	W														
Wave generator-A/B $\phi 6$	$\phi 6$ H7	7 $^{\circ}\pm 1$	2JS9/P9	14	50	5.4	0.55	18	1.8	6.9	0.7	35	3.6	8500	3500	≤ 20	≥ 10000
					80	7.8	0.8	23	2.4	11	1.1	47	4.8	8500	3500	≤ 20	≥ 15000
					100	7.8	0.8	28	2.9	11	1.1	54	5.5	8500	3500	≤ 20	≥ 15000
Wave generator-A/B $\phi 8$	$\phi 8$ H7	9.4 $^{\circ}\pm 1$	3JS9/P9														

Laitival