



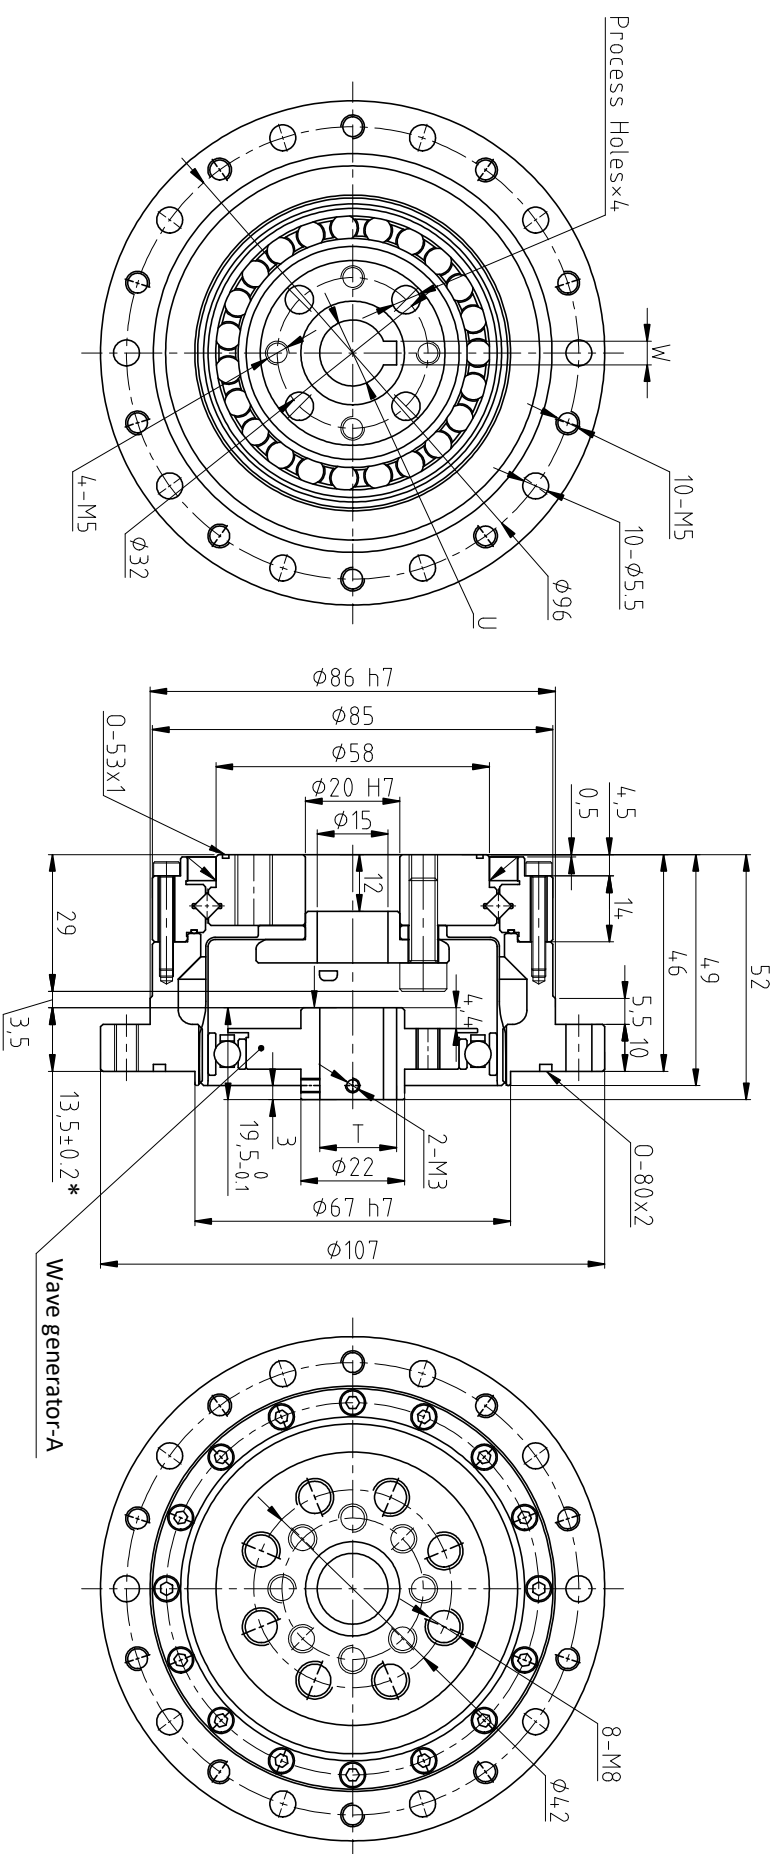

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.



Laifuai

FSS-25-XX-U-I-LF										Model		Reduction ratio	Rated torque at2000r/min Input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life					
MODEL				U	T	W	25										Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg	Hour	
																	50	39	4	98	10	55	5.6	186	19	5600	3500	≤20		≥10000
																	80	63	6.4	137	14	87	8.9	255	26	5600	3500	≤20		≥15000
Wave generator-A φ11				φ11H7	12.8 ^{±1}	4JS9/P9	25										100	67	6.8	157	16	108	11	284	29	5600	3500	≤20	FSS-I:1.46	≥15000
																	120	67	6.8	167	17	108	11	304	31	5600	3500	≤20		≥15000
Wave generator-A φ14				φ14H7	16.3 ^{±1}	5JS9/P9											160	67	6.8	176	18	108	11	314	32	5600	3500	≤20		≥15000