



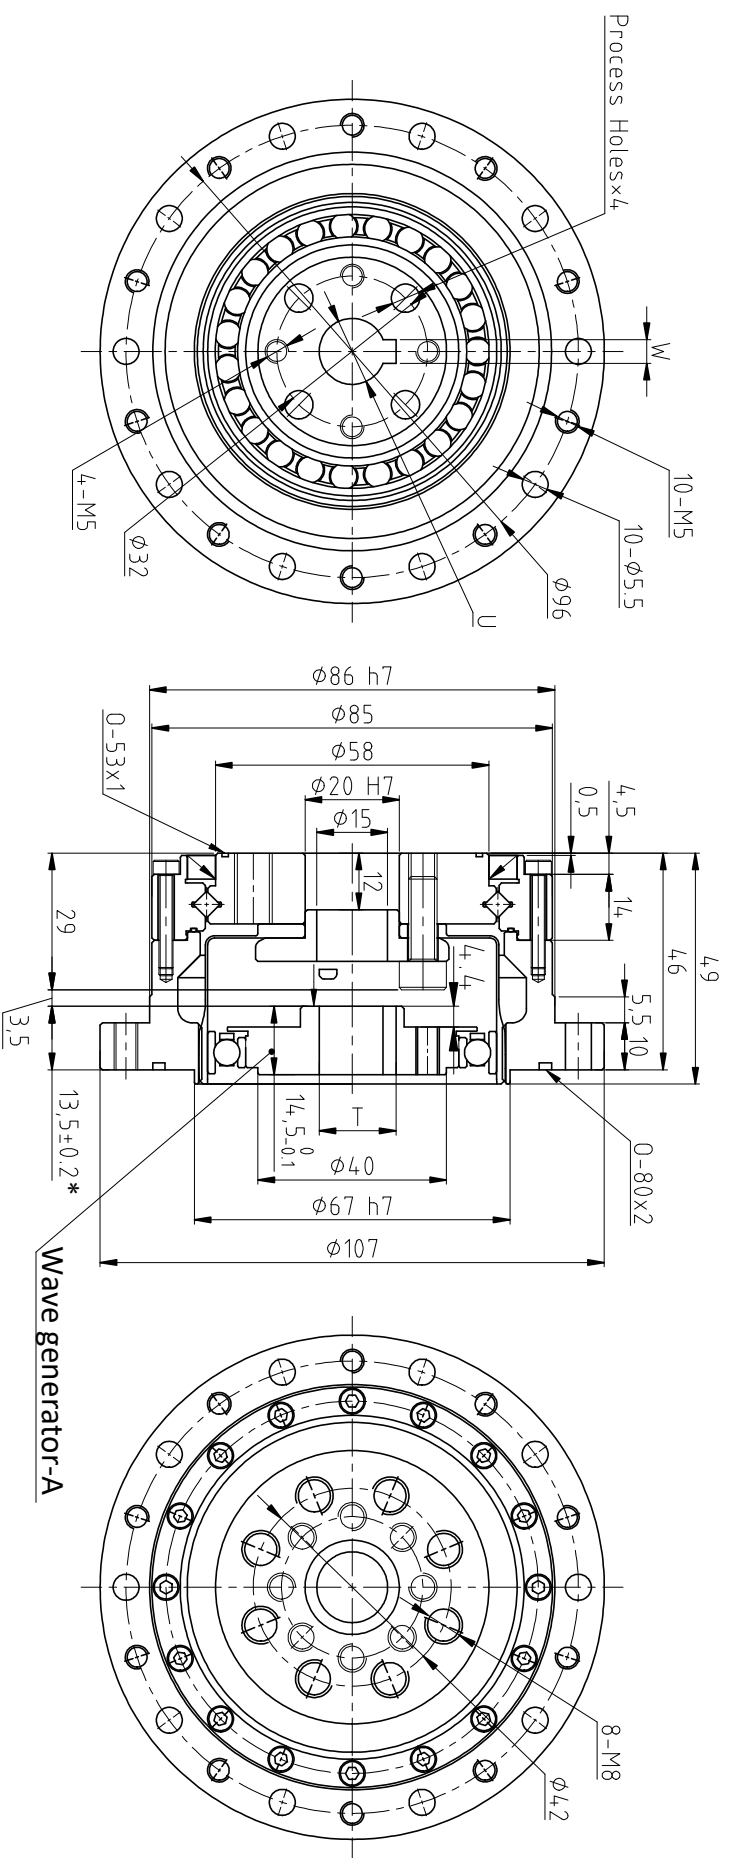

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.



FSS-25-XX-U-I														Model		Reduction ratio	Rated torque at2000r/min input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life
MODEL				U	T	W	25	50	Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg	Hour								
Wave generator-A φ11				φ11H7	12.8 ^{h8}	4JS9/P9		80	39	4	98	10	87	8.9	186	19	5600	3500	≤20	≥10000									
Wave generator-A φ14				φ14H7	16.3 ^{h8}	5JS9/P9		100	63	6.4	137	14	108	11	255	26	5600	3500	≤20	≥15000									
								120	67	6.8	157	16	108	11	284	29	5600	3500	≤20	≥15000									
								160	67	6.8	167	17	108	11	304	31	5600	3500	≤20	≥15000									
								160	67	6.8	176	18	108	11	314	32	5600	3500	≤20		≥15000								