



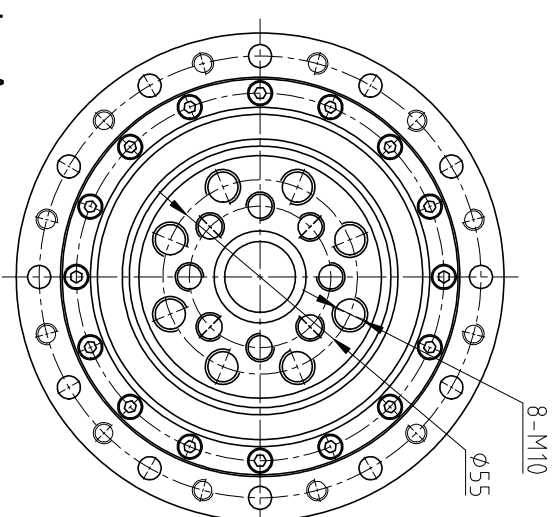

D Direction



Laitua!

FSS-32-XX-U-I-LF															
MODEL		U	T	W											
Wave generator-A Ø14	Ø14,H7	16.3 ^{+0.1}	5JS9/P9		Model	Reduction ratio	Rated torque at2000r/min input	Permissible peak torque at start and stop	Permissible maximum value for average load torque	Permissible maximum momentary torque	Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desia life
Wave generator-A Ø19	Ø19H7	21.8 ^{+0.1}	6JS9/P9												
Wave generator-A Ø22	Ø22H7	24.8 ^{+0.1}	6JS9/P9												
		25.3 ^{+0.1}	8JS9/P9												
		32	50	76	7.8	216	22	108	11	382	39	4800	3500	≤20	kg
		80	118	12	304	31	167	17	568	58	4800	3500	≤20		≥15000
		100	137	14	333	34	261	22	647	66	4800	3500	≤20	FSS-I:3.11	≥15000
		120	137	14	353	36	261	22	686	70	4800	3500	≤20		≥15000
		160	137	14	372	38	261	22	686	70	4800	3500	≤20		≥15000