



Laifual[®]

STRAIN WAVE GEAR

Reducer for precision control
General Catalog

Laifual[®]



About Laifual Drive

Zhejiang Laifual Drive Co., Ltd. is committed to becoming a leading supplier of precision motion control solutions. We have developed Strain Wave Gear, frameless motors, encoders, drives, precision bearings, and more—these developments have resulted in three major business segments: Strain Wave Gear, rotary actuators, and precision components.


With over 10 years of profound industry experience, Laifual has grown into a comprehensive, solution-oriented enterprise, evolving from a single-component manufacturer to a full-solution provider in precision motion control.

Currently, Laifual offers several series of Strain Wave Gear, covering Models from size 5 to 58. The entire production process is independently managed in-house, enabling us to provide various customized non-standard solutions for bearings and structural components. Our 65,000-square-meter modern facility is equipped with world-class production and inspection equipment. We maintain strict quality control throughout every stage—from raw materials to finished products—to ensure outstanding product quality.

Laifual operates multiple R&D centers focused on strain wave gear technology and has established joint laboratories with several well-known domestic universities. Backed by a research and development team of more than 100 employees, Laifual leverages strong technical capabilities and advanced manufacturing processes to effectively reduce production costs and shorten delivery times.

Our products are widely used in robotics, aerospace equipment, CNC machine tools, semiconductor manufacturing equipment, precision automation, and other advanced industrial fields.

For more information, please visit our website: www.laifualdrive.com

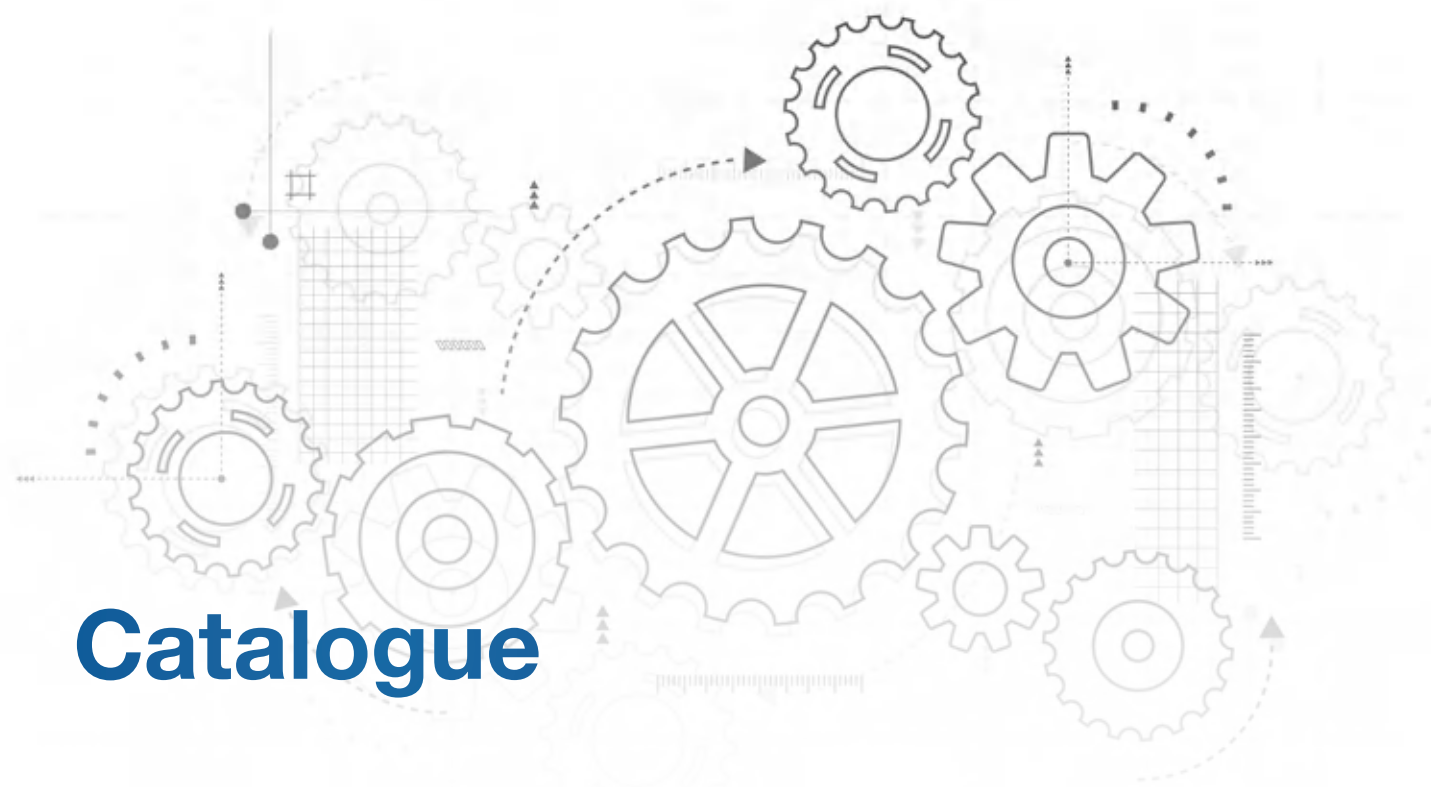

Catalogue

Product Lineup	06	Introduction of FSD	58
		Technical Data of FSD	59
Principle of Strain Wave Gear	08	Outline Drawing of FSD	60
Technical Information	09	FH Series	63
On the Tooth Profile	09	Introduction of FHT/FHN/FHG	64
Terms and Definitions	10	Technical Data of FHT/FHN/FHG	66
Selection Process	12	Outline Drawing of FHT/FHN/FHG	69
On the Wave generator	13	Introduction of FHD	100
Precautions on Assembly	14	Technical Data of FHD	101
Precautions on Grease Lubricant	19	Outline Drawing of FHD	102
Sealing Mechanism	22	Others	108
On the Screw	22		
Checking Main Roller Bearing	23	Warranty	108
Main Roller Bearing Specifications	24	Trademark	108
On Starting Torque	26	Applications	109
FS Series	28	Safety Use	110
Introduction of FSS/FFS/FSN/FSG	29		
Technical Data of FSS/FFS/FSN/FSG	30		
Outline Drawing of FSS/FFS/FSN/FSG	33		

Product Lineup

- Available — This is currently available.
- Not Available — This is temporarily not available.



FSS/FSG-C-I



FSS/FSN/FSG-I



FSS/FSG-II



FFS-I



FSD



FHT/FHG-I



FHT/FHG-II



FHT/FHN/FHG-III



FHT/FHN/FHG-IV



FHT/FHG-V



FHD-I



FHD-III

Model				Size	30 Ratio	50 Ratio	80 Ratio	100 Ratio	120 Ratio	160 Ratio		
Component Type	Cup Type	Standard Type	FSS-XX-C-I	5	○	●	○	●	○	○		
				8	●	●	○	●	○	○		
				11	●	●	●	●	○	○		
				14	●	●	●	●	●	○		
				17	●	●	●	●	●	○		
				20	●	●	●	●	●	●		
				25	●	●	●	●	●	●		
				32	●	●	●	●	●	●		
		40	○	●	●	●	●	●				
		High Torque Type	FSG-XX-C-I	14	○	●	●	●	●	○		
	17			○	●	●	●	●	○			
	20			○	●	●	●	●	●			
	25			○	●	●	●	●	●			
	32			○	●	●	●	●	●			
	40			○	●	●	●	●	●			
	Hat Type			Standard Type	FHT-XX-C-I	11	●	●	●	●	○	○
						14	●	●	●	●	●	○
		17	●			●	●	●	●	○		
		20	●			●	●	●	●	●		
		25	●			●	●	●	●	●		
		32	●			●	●	●	●	●		
		40	○			●	●	●	●	●		
	High Torque Type	FHG-XX-C-I	14	○	●	●	●	●	○			
			17	○	●	●	●	●	○			
			20	○	●	●	●	●	●			
25			○	●	●	●	●	●				
32			○	●	●	●	●	●				
40			○	●	●	●	●	●				
45			○	○	●	●	●	○				
50			○	○	●	●	●	○				
Units	Cup Type	Standard Type	FSS-XX-U-I	14	●	●	●	●	●	○		
				17	●	●	●	●	●	○		
				20	●	●	●	●	●	●		
				25	●	●	●	●	●	●		
				32	●	●	●	●	●	●		
			40	○	●	●	●	●	●			
			FSS-XX-U-II	14	○	●	●	●	●	○		
				17	○	●	●	●	●	○		
				20	○	●	●	●	●	●		
				25	○	●	●	●	●	●		
				32	○	●	●	●	●	●		
			FSF-XX-U-I	14	●	●	●	●	●	○		
				17	●	●	●	●	●	○		
				20	●	●	●	●	●	●		
				25	●	●	●	●	●	●		
				40	○	●	●	●	●	●		
			FFS-XX-U-I	11	○	●	●	●	○	○		
				14	○	●	●	●	○	○		
				3	○	○	○	○	○	○		
		5		○	○	○	○	○	○			
		8		●	●	○	○	○	○			
		Lightweight Standard Type	FSN-XX-U-I	11	●	●	●	●	○	○		
				14	●	●	●	●	●	○		
				17	●	●	●	●	●	○		
				20	●	●	●	●	●	●		
				25	●	●	●	●	●	●		
			FSN-XX-U-II	32	○	●	●	●	●	●		
				40	○	●	●	●	●	●		
				14	●	●	●	●	●	○		
				17	●	●	●	●	●	○		
				20	●	●	●	●	●	●		
		High Torque Type	FSG-XX-U-I	25	○	●	●	●	●	●		
				32	○	●	●	●	●	●		
				40	○	●	●	●	●	●		
				14	○	●	●	●	●	○		
				17	○	●	●	●	●	○		
			FSG-XX-U-II	20	○	●	●	●	●	●		
				25	○	●	●	●	●	●		
				32	○	●	●	●	●	●		
				40	○	●	●	●	●	○		
				14	○	●	●	●	○	○		
		Ultra Flat Type	FSD-XX-U-I	17	○	●	●	●	○	○		
				20	○	●	●	●	○	○		
				25	○	●	●	●	○	○		
32	○			●	●	●	○	○				
40	○			●	●	●	○	○				

				Model	Size	30 Ratio	50 Ratio	80 Ratio	100 Ratio	120 Ratio	160 Ratio
Units	Hat Type	Standard Type	FHT-XX-U-I	11	•	•	•	•	•	○	○
				14	•	•	•	•	•	•	○
				17	•	•	•	•	•	•	○
				20	•	•	•	•	•	•	•
				25	•	•	•	•	•	•	•
				32	•	•	•	•	•	•	•
				40	○	•	•	•	•	•	•
			FHT-XX-U-II	14	•	•	•	•	•	•	○
				17	•	•	•	•	•	•	○
				20	•	•	•	•	•	•	•
				25	•	•	•	•	•	•	•
				32	•	•	•	•	•	•	•
		Hollow Shaft Type	FHT-XX-U-III	11	•	•	•	•	•	•	○
				14	•	•	•	•	•	•	○
				17	•	•	•	•	•	•	○
				20	•	•	•	•	•	•	•
				25	•	•	•	•	•	•	•
				32	•	•	•	•	•	•	•
				40	○	•	•	•	•	•	•
			FHT-XX-U-IV	14	•	•	•	•	•	•	○
				17	•	•	•	•	•	•	○
				20	•	•	•	•	•	•	•
				25	•	•	•	•	•	•	•
				32	•	•	•	•	•	•	•
		Simple Hollow Shaft Type	FHT-XX-U-V	40	○	•	•	•	•	•	•
				14	•	•	•	•	•	•	○
				17	•	•	•	•	•	•	○
				20	•	•	•	•	•	•	•
				25	•	•	•	•	•	•	•
				32	•	•	•	•	•	•	•
				40	○	•	•	•	•	•	•
			FHN-XX-U-III	14	•	•	•	•	•	•	○
				17	•	•	•	•	•	•	○
				20	•	•	•	•	•	•	•
				25	•	•	•	•	•	•	•
				32	•	•	•	•	•	•	•
		Lightweight Hollow Shaft Type	FHN-XX-U-IV	40	○	•	•	•	•	•	•
				14	•	•	•	•	•	•	○
				17	•	•	•	•	•	•	○
				20	•	•	•	•	•	•	•
				25	•	•	•	•	•	•	•
				32	•	•	•	•	•	•	•
				40	○	•	•	•	•	•	•
			High Torque Standard Type	14	○	•	•	•	•	•	○
				17	○	•	•	•	•	•	○
				20	○	•	•	•	•	•	•
				25	○	•	•	•	•	•	•
				32	○	•	•	•	•	•	•
				40	○	•	•	•	•	•	•
				45	○	○	•	•	•	•	•
				50	○	○	•	•	•	•	•
				58	○	○	•	•	•	•	•
			FHG-XX-U-II	14	○	•	•	•	•	•	○
				17	○	•	•	•	•	•	○
				20	○	•	•	•	•	•	•
				25	○	•	•	•	•	•	•
				32	○	•	•	•	•	•	•
		High Torque Hollow Shaft Type	FHG-XX-U-III	14	○	•	•	•	•	•	○
				17	○	•	•	•	•	•	○
				20	○	•	•	•	•	•	•
				25	○	•	•	•	•	•	•
				32	○	•	•	•	•	•	•
				40	○	•	•	•	•	•	•
				45	○	○	•	•	•	•	•
				50	○	○	•	•	•	•	•
				58	○	○	•	•	•	•	•
			FHG-XX-U-IV	14	○	•	•	•	•	•	○
				17	○	•	•	•	•	•	○
				20	○	•	•	•	•	•	•
				25	○	•	•	•	•	•	•
				32	○	•	•	•	•	•	•
		High Torque Simple Hollow Shaft Type	FHG-XX-U-V	40	○	•	•	•	•	•	•
				14	○	•	•	•	•	•	○
				17	○	•	•	•	•	•	○
				20	○	•	•	•	•	•	•
				25	○	•	•	•	•	•	•
				32	○	•	•	•	•	•	•
				40	○	•	•	•	•	•	•
				45	○	○	•	•	•	•	•
				50	○	○	•	•	•	•	•
				58	○	○	•	•	•	•	•
		High Torque Lightweight Hollow Shaft Type	FHNG-XX-U-III	14	○	•	•	•	•	•	○
				17	○	•	•	•	•	•	○
				20	○	•	•	•	•	•	•
				25	○	•	•	•	•	•	•
				32	○	•	•	•	•	•	•
				40	○	•	•	•	•	•	•
				14	○	•	•	•	•	•	○
				17	○	•	•	•	•	•	○
				20	○	•	•	•	•	•	•
				25	○	•	•	•	•	•	•
		Ultra Flat Simple Unit Type	FHD-XX-U-I	32	○	•	•	•	•	○	○
				14	○	•	•	•	•	○	○
				17	○	•	•	•	•	○	○
				20	○	•	•	•	•	○	○
				25	○	•	•	•	•	○	○
				32	○	•	•	•	•	○	○
			FHD-XX-U-III	14	○	•	•	•	•	○	○
				17	○	•	•	•	•	○	○
				20	○	•	•	•	•	○	○
				25	○	•	•	•	•	○	○
				32	○	•	•	•	•	○	○
Miniature	Cup Type	Lightweight Unit Type	FSN-XX-U-I	5	○	•	•	•	•	○	○
				8	○	•	•	•	•	○	○
				11	○	•	•	•	•	○	○
	Hat Type	Standard Unit Type	FHT-XX-U-I	8	•	•	•	•	•	○	○
				11	•	•	•	•	•	○	○
				11	•	•	•	•	•	○	○

Principle of Strain Wave Gear

Composition of Strain Wave Gear

Strain Wave Gear consist of three basic components: Wave generator, flexspline and circular spline.

Wave generator: it is made up of a wave bearing and an elliptical cam. The Wave generator is usually attached to the input end. The inner ring of the bearing is fixed around the cam, causing the outer ring of the bearing deform into an elliptical shape.

Flexspline: it is an elastic thin-walled component with teeth on outer surface. It is usually mounted to output end.

Circular Spline: it is a rigid ring with internal teeth. It usually has two more teeth than the flexspline, and generally mounted to the housing.

Working Principle

As a reducer, the strain wave gear typically operates with the Wave generator as the driving element, the circular spline is fixed, the flexspline serving as the output.

When the Wave generator is placed inside the flexspline, the flexspline is deformed into an elliptical shape, causing its teeth to engage with those of the circular spline along the major axis of the ellipse. Along the minor axis, the teeth are completely disengaged.

As the Wave generator rotates, it continuously deforms the flexspline. The gear teeth go through cycles of engagement and disengagement, thus transmitting motion from the Wave generator to the flexspline.

Characteristics of Strain Wave Gear



High Accuracy: A significant portion of the teeth are always engaged in two zones 180 degrees apart. This neutralizes the effects of tooth pitch errors and accumulated pitch errors, ensuring high positional and rotational accuracy.

High Reduction Ratio: Strain Wave Gear offer high single-stage reduction ratios ranging from 1/30 to 1/500. The three core components are aligned along a common axis, enabling high ratios without complex structures.

High Torque Capacity: Each tooth experiences minimal load, yet the gear provides high torque capacity due to the large number of teeth engaged simultaneously.

Small Size and Lightweight: While being smaller and lighter than conventional gearing mechanisms, the strain wave gear provides the same levels of torque and speed reduction ratios as its conventional counterparts, enabling machinery and equipment to be more compact and lightweight.

It also offers superior efficiency, a long service life, and quiet operation with minimal vibration.

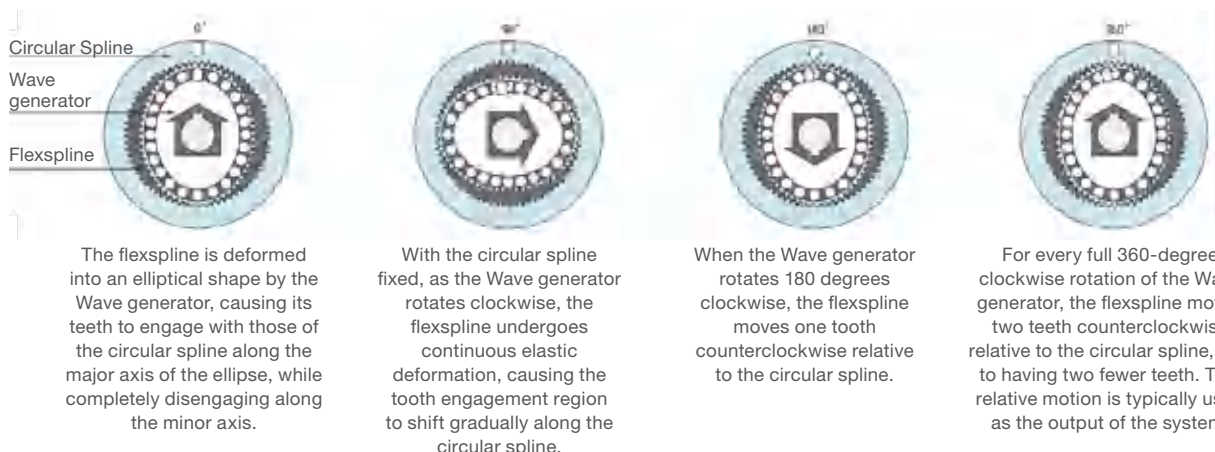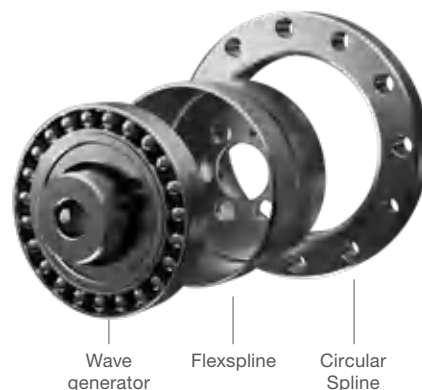

Technical Information



ON THE TOOTH PROFILE

Laifual Tooth Engagement - Step-by-Step Improvement

- Torque capacity increase 15%-30%
- Temperature rise decreased by 8-10°C
- Minimize the tooth surface contact area prone to fatigue pitting
- Service life exceeds 15,000 hours

About FS tooth profile

We have made several upgrades to the traditional theoretical double-arc profile. The original two-curve continuous arc profile has been optimized into a multi-segment continuous arc with varying curvatures. This ensures proper gear meshing in the reducer while reducing relative sliding friction, thereby mitigating the risk of grease failure caused by grease displacement. Based on the 5-tooth design, the load capacity is increased by 15%, the temperature rise is reduced by 8–10°C, and the gear contact area affected by fatigue pitting is reduced by more than 30%. The continuous operating life now exceeds 15,000 hours, significantly improving the overall performance of the strain wave gearbox.

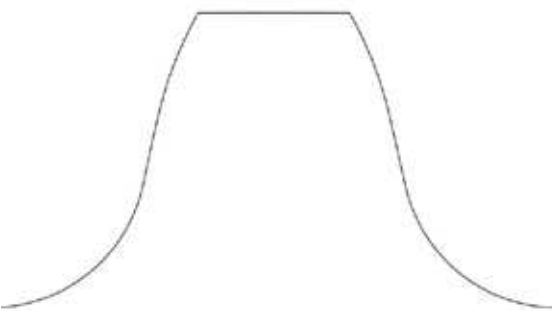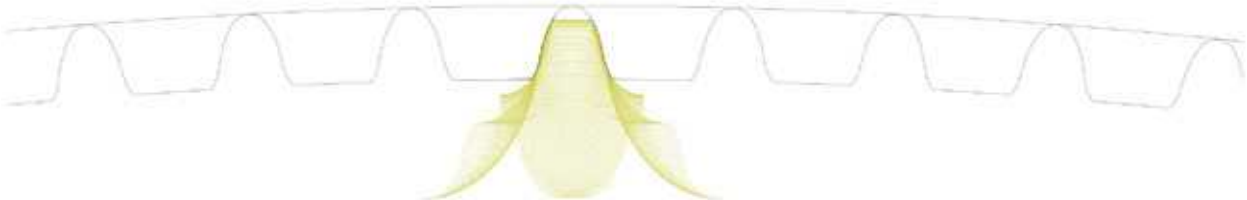

During development, the formation of the flex-spline tooth profile can be defined by the radial displacement of the Wave generator. Different reduction ratios can be achieved by matching various tooth profiles, and the meshing backlash can be conveniently adjusted according to actual conditions, ensuring that the reducer operates in an optimal working state.

TERMS AND DEFINITIONS

■ Starting Torque

It is the minimum torque value applied to the input end at which the strain wave gear first starts to rotate with no load.

■ Permissible Peak Torque for Start and Stop

It is the maximum torque as a result of the moment of inertia of the output load during acceleration and deceleration.

■ Permissible Maximum Momentary Torque

It is the momentary peak torque the strain wave gear may be subjected to the event of a collision or emergency stop.

■ Maximum Average Input Speed

It is the average value of input speed.

■ Rated Torque


It indicates allowable continuous load torque when the rated input speed is 2000r/min.

■ Permissible Maximum Value for Average Load Torque

It is the maximum torque when the strain wave gear keeps continuous operation.

■ Maximum Input Speed

It is the maximum allowable input rotational speed.

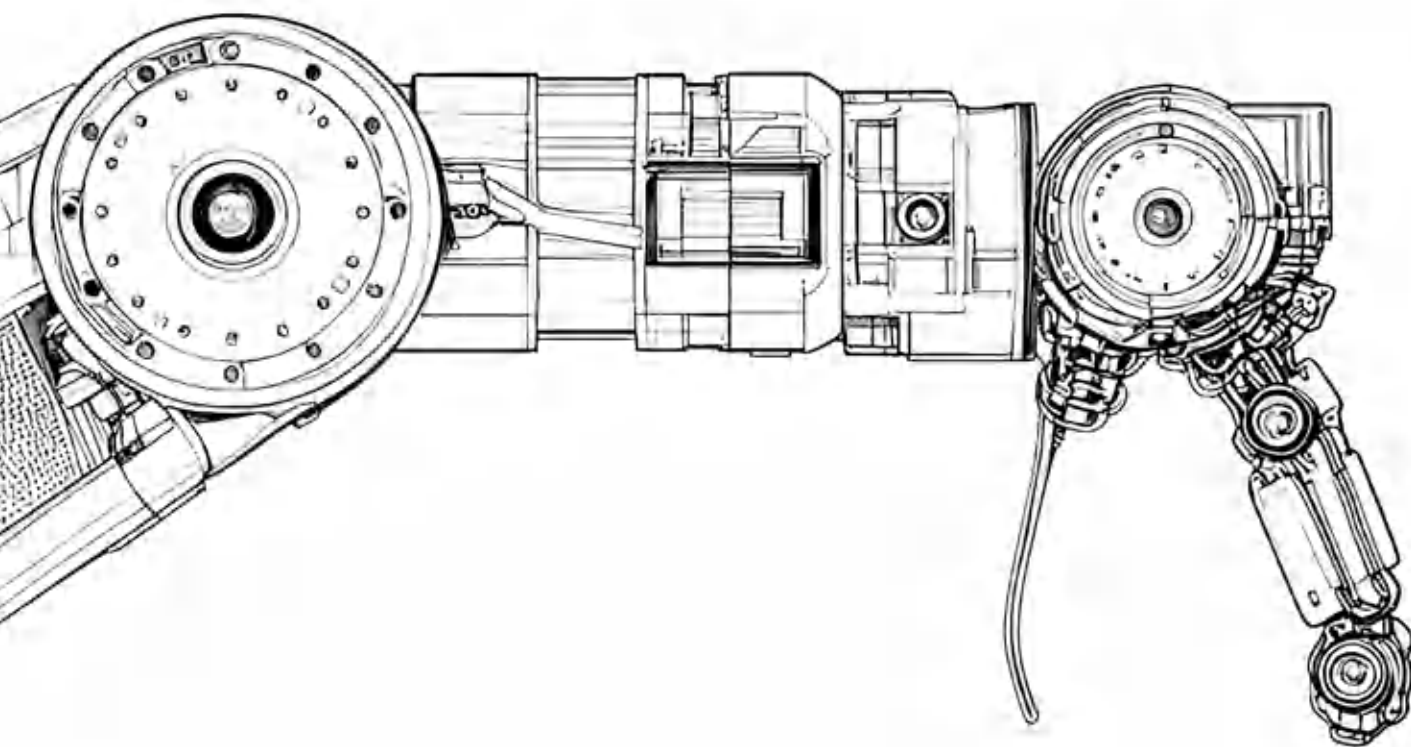

TERMS AND DEFINITIONS

■ Angle Transmission Accuracy


Angle transmission accuracy indicates the difference between the logical rotating angle and the actual rotating angle as the angle transmission error when any rotating angle is given as an input.

■ Stiffness Diagram

From the stiffness graph, parameters such as backlash, stiffness, hysteresis loss, and lost motion can be obtained. →

■ Backlash

Fix the circular spline and input end (Wave generator) of the strain wave gear, and when $\pm 2\%$ rated torque is applied to the output end (flexspline), a small amount of angular displacement at the output end is observed, which is expressed as backlash.

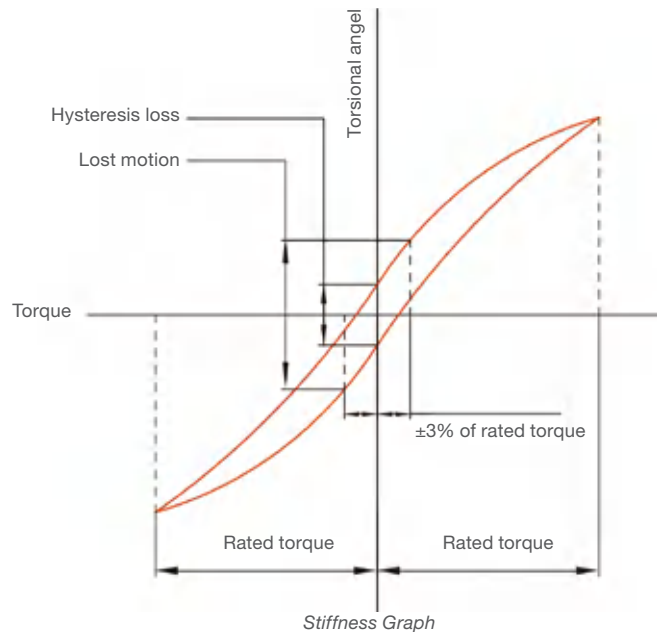

■ Torsional Stiffness (Spring Constant)

Fix the circular spline and input end (Wave generator) of the strain wave gear, and apply torque to the output end (flexspline). The applied torque starts from 0 and increases or decreases to the rated torque on the positive and negative sides respectively. The change of the torsion angle at the output side can be slotted as 'stiffness curve', and the inclination of the stiffness curve can be expressed as the spring constant (unit: Nm/rad)

K1... the spring constant for the torque from '0' to 'T1'

K2... the spring constant for the torque from 'T1' to 'T2'

K3... the spring constant for the torque from 'T2' to rated torque

■ Hysteresis loss

Fix the circular spline and input end (Wave generator) of the strain wave reducer, and apply torque to the output end (flexspline) until the rated torque, when the torque returns to "0", the torsion angle does not become '0' completely, there will be a slight amount of clearance is left. This amount of clearance is called hysteresis loss.

■ Lost motion


At $\pm 3\%$ of rated torque, the torsion angle in the 'stiffness curve' is expressed as a lost motion.

SELECTION PROCESS

In general, the servo system is rarely in a continuous constant loadstate. The input rotational speed, load torque change and comparatively large torque are applied at start and stop. Unexpected impact torque may be applied.

These fluctuating load torques should be converted to the average load torque in selecting a Model number.

As an accurate cross roller bearing is built in the direct external load support (output flange) of the unit type, the maximum moment load, life of the cross roller bearing and the static safety coefficient should also be checked (see 'Checking the main roller bearing' on Page 23)

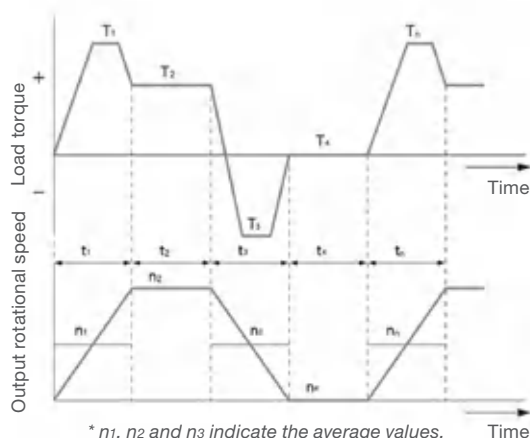

Obtain the value of each load torque pattern.

Load torque	Tn(Nm)
Time	tn(sec)
Output rotational speed	Nn(r/min)
<Normal operation pattern>	
Starting time	T1, T1, n1
Steady operation time	T2, T2, n2
Stopping (slowing) time	T3, T3, n3
Break time	T4, T4, n4

<Maximum rotational speed>

Max. output rotational speed	no max
Max. input rotational speed	ni max
(Restricted by motors)	

<Impact torque>

When impact torque is applied	Ts, Ts, n4
-------------------------------	------------

< Required life >

$$L_{10} = L(\text{hours})$$

Flowchart of Model number selection

Select a Model number according to the following flowchart. If you find a value exceeding that from the ratings, you should review it with the upper-level Model number or consider reduction of conditions including the load torque.

Calculate the average load torque applied on the output side of strain wave gear from the load torque pattern: $T_{av}(N.m)$.

$$T_{av} = \sqrt[3]{\frac{n_1 \cdot t_1 \cdot |T_1|^3 + n_2 \cdot t_2 \cdot |T_2|^3 + \dots + n_n \cdot t_n \cdot |T_n|^3}{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n}}$$

Select a Model number temporarily with the following conditions.
 $T_{av} \leq$ Permissible maximum value of the average load torque

Calculate the average output rotational speed: $no_{av}(r/min)$

$$no_{av} = \frac{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n}{t_1 + t_2 + \dots + t_n}$$

Obtain the reduction ratio (R). A limit is placed on 'ni max' by motors.

$$\frac{ni_{max}}{no_{max}} \geq R$$

Calculate the average input rotational speed from the average output rotational speed (no_{av} and the reduction ratio (R): $ni_{av}(r/min)$

$$ni_{av} = no_{av} \cdot R$$

Calculate the maximum input rotational speed from the max. output rotational speed (no_{max}) and the reduction ratio (R): $ni_{max}(r/min)$

$$ni_{max} = no_{max} \cdot R$$

Check whether the temporarily $ni_{av} \leq$ Permissible average input rotational selected Model number speed (r/min)

Satisfies the following condition $ni_{max} \leq$ Permissible max. input rotational from the ratings speed (r/min)

OK

Check whether T_1 and T_3 are equal to or less than the permissible peak torque (Nm) value at start and stop from the ratings.

OK

Check whether T_s is equal to or less than the permissible maximum momentary torque (Nm) value from the ratings.

OK

Calculate (N_s) the permissible number of times from output rotational speed no and time t_s when the impact torque is applied, and check whether it satisfies the usage conditions.

$$N_s = \frac{10^4}{2 \cdot \frac{no \cdot R}{60} \cdot t} \quad \text{.....} \quad N_s \leq 1.0 \times 10^4 \quad (\text{times})$$

$$N_s = \frac{10^4}{2 \cdot \frac{no \cdot R}{60} \cdot t} \quad \text{.....} \quad N_s \leq 1.0 \times 10^4 \quad (\text{times})$$

OK

Calculate the lifetime.

$$L = 7000 \cdot \left(\frac{T_r}{T_{av}} \right)^3 \cdot \left(\frac{ni}{ni_{av}} \right) \quad (\text{hours})$$

Check whether the calculated lifetime is equal to or more than the life of the Wave generator.

OK


The Model number is determined.

Review of the operation conditions and Model number

ON THE Wave generator

The Wave generator includes a structure of a European-style coupling with a self-aligning structure and an rigid type without an automatic self-aligning structure and varies depending on the series. For details, please refer to the outline drawing of each series.

Basic structure and shape of Wave generator shown as below.

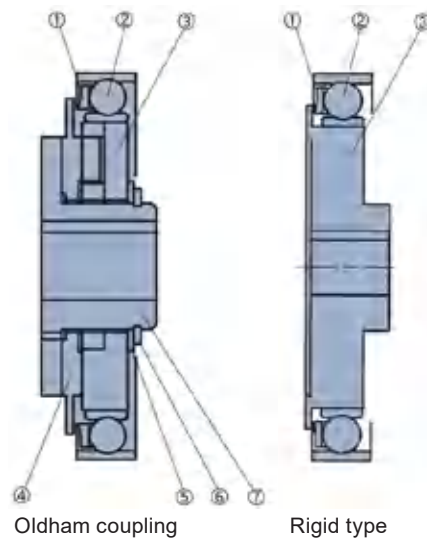

Oldham coupling Structure - Utiling a European Style Coupling




- ① Retainer
- ② Wave bearing
- ③ Wave generator Plug
- ④ Insert hole
- ⑤ Rubwasher
- ⑥ C type retaining ring
- ⑦ Wave generator hub

Axial force and axial fixation of Wave generator

The axial force on Wave generator begins to work due to the elastic deformation of the flexspline. When used as a reducer, the axial force moves towards the inside of the flexspline. When used as a speed increaser, the axial forces movement is opposite to the direction of the deceleration. The design to prevent axial force of the Wave generator shall be adopted under any conditions of usage.

** Please make sure to consult with the authorized distributor when setting the stop screw and fixing it to the input axial on the Wave generator.*

Axial force direction of the Wave generator

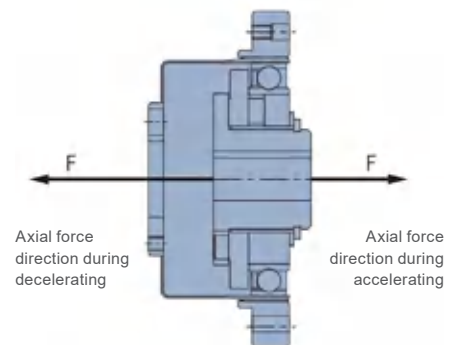

Maximum hole diameter of Wave generator of Unit Type

The standard hole diameter of the Wave generator is shown in the outline drawing and maybe changed in the range up to the maximum size range shown in the table.

We recommend the dimension of keyway based on (GB) standard. It is necessary that the dimension of keyways should be fully durable the transmission torque.

Hole diameter of Wave generator

unit: mm


Model	5	8	11	14	17	20	25	32	40	45	50	58
Standards size(H7)	3	5	5、6、8	6、8	8、11、14	8、11、14	11、14	14、19、22	14、19、22	19、22	19、22	
Minimum size	\	\	5	6	8	8	11	14	14	19	19	
Maximum size	\	\	8	8	14	14	14	22	22	22	22	

** The hole diameter of the Wave generator can be customized according to customer requirements. Please contact the authorized distributor in case of any changes in the table.*


PRECAUTIONS ON ASSEMBLY

The connecting and fixing method of Wave generator


1. Input shaft has a shaft shoulder, it can be connected with Wave generator directly. As shown in the figure.

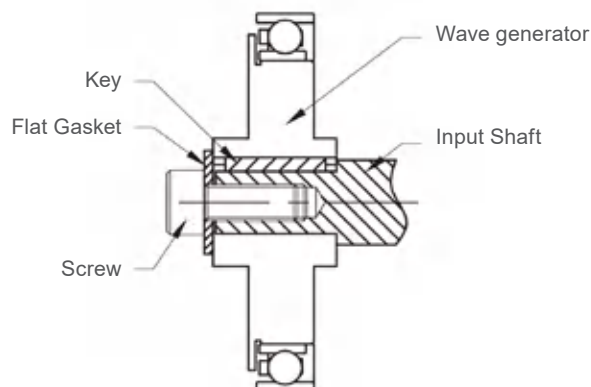


2. Input shaft has a shaft shoulder, but it's too long. You can add a space ring on the shaft (the parallelism of the spacer ring should be within 0.01mm), then connect and fix it through the thimble screw on the Wave generator. As shown in the figure.

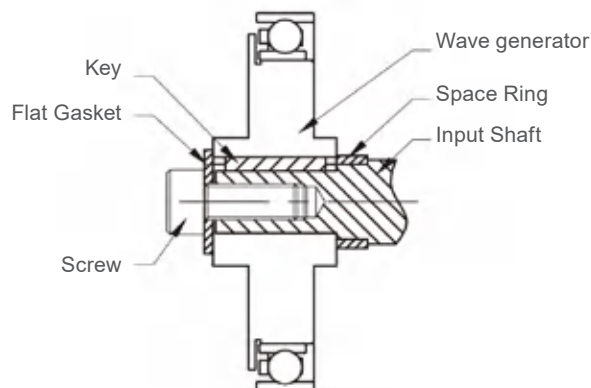

3. Input shaft has no shaft shoulder. Fix a connection gasket on the Wave generator, then connect and fix with the input shaft. As shown in the figure.

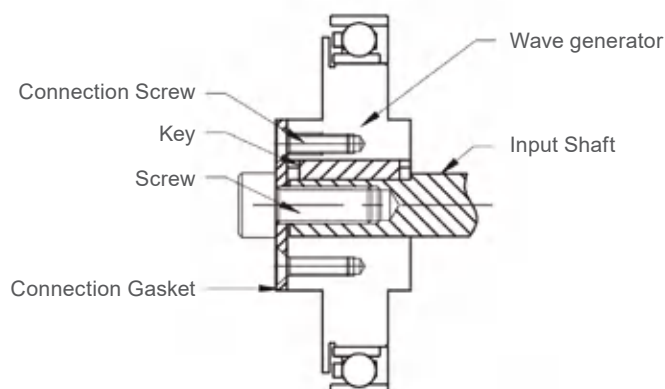


4. This fixing method is suitable for small Models, optical axis input. Input shaft inserted into the Wave generator, then connect and fix it through the thimble screw on Wave generator. As shown in the figure.

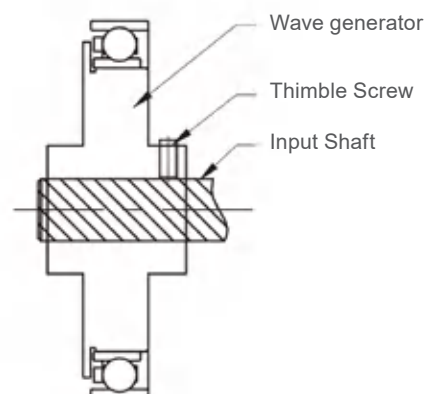


PRECAUTIONS ON ASSEMBLY


Installation of FSS/FSG/FSN series

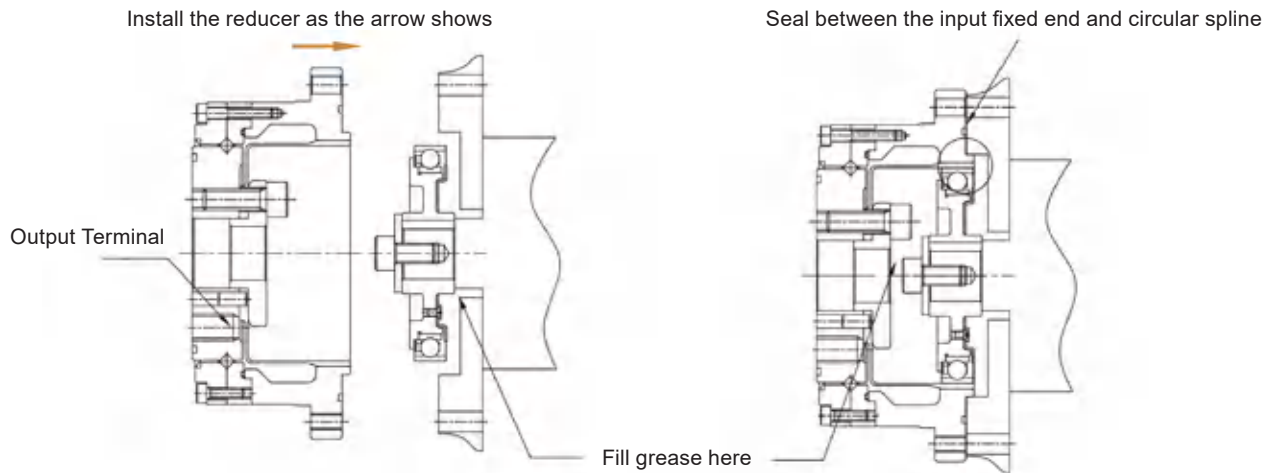

The First Method of Installation for FHT/FHG-I/II Series

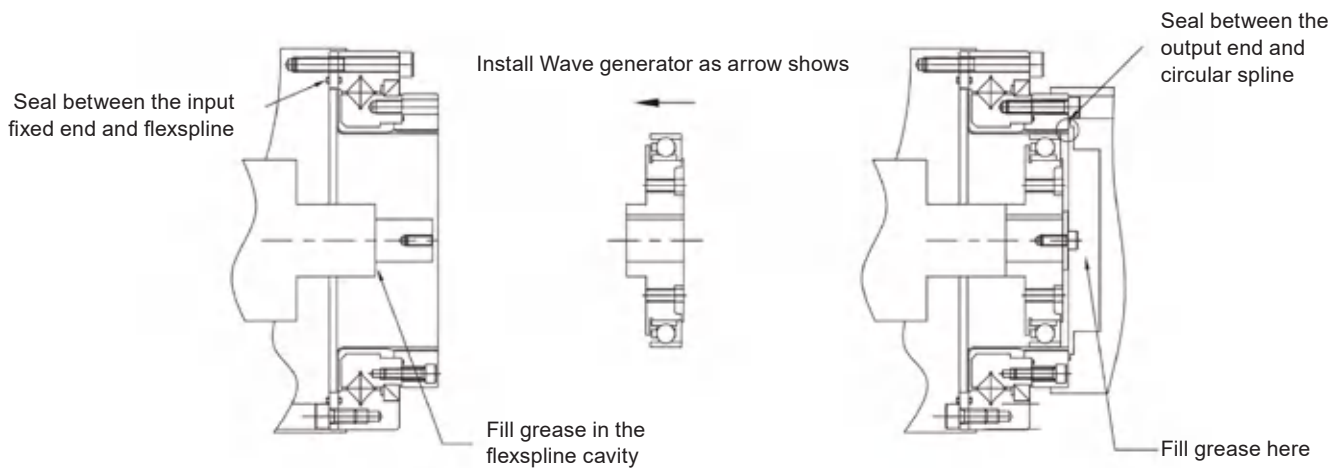


The Second Method of Installation for FHT/FHG-I/II Series

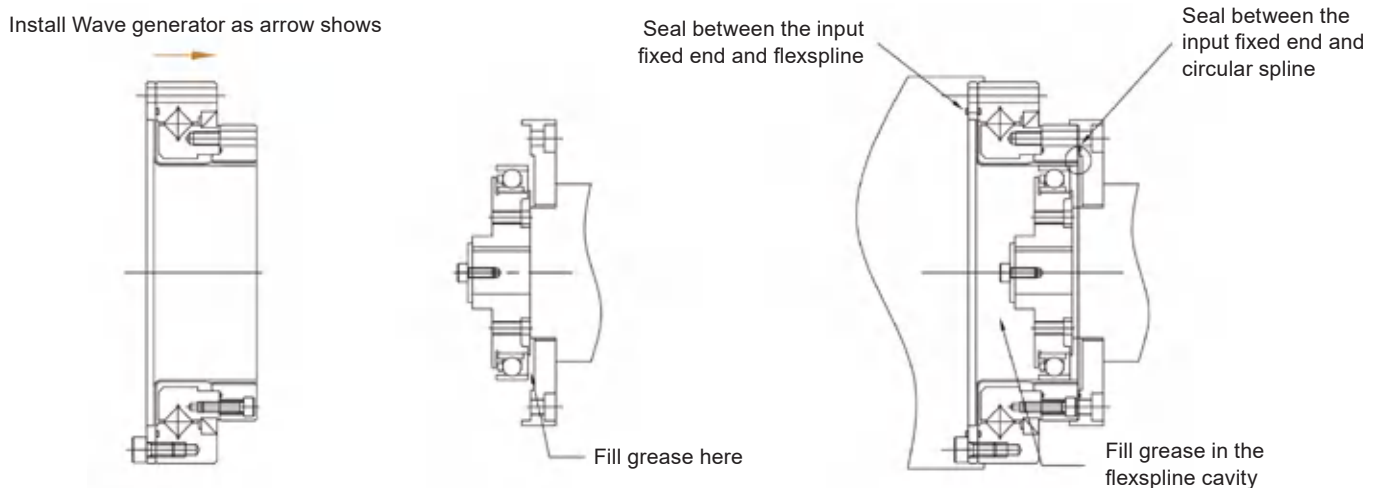

PRECAUTIONS ON ASSEMBLY

Assembly procedure

Install the circular spline and flexspline on the device, and then install the Wave generator. Otherwise, it may cause stuffing damage to the gear teeth or improper eccentric gear meshing. Please pay close attention to it.

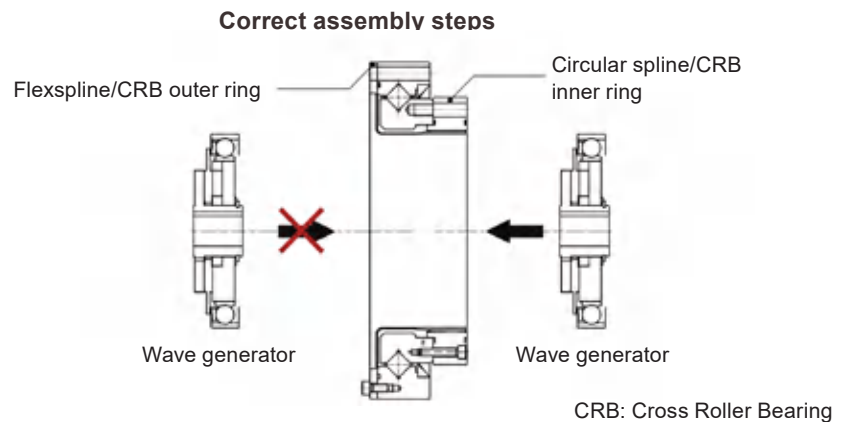

Precautions on installation:

The improper assembly may cause vibration and noise during operation. Please follow the precautions below for assembly

Precautions on Wave generator:

1. Please avoid applying undue force to the bearing on the Wave generator during assembly. We suggest rotating the Wave generator while inserting, this will ease the process.
2. If the Wave generator does not have an Oldham coupling, extra care must be taken to ensure that concentricity and inclination are within the specified limits.

Precautions on circular spline:

1. Mounting surfaces need to have adequate flatness, smoothness, and no distortion.
2. Especially in the area of the screw holes, burrs or foreign matter should not be present.
3. Please make sure chamfering and avoidance machining are performed on the housing assembly to avoid interference with the circular spline.
4. The circular spline should be rotatable within the housing. Be sure there is no interference and it does not catch on anything.
5. When mounting the bolts, make sure the bolt holes are correct and aligned. Bolts should rotate freely when tightening and should not have any irregularity due to misaligned or oblique bolt holes.
6. Don't tighten the bolts to the specified torque all at once. Tighten the bolts temporarily with about half the specified torque, then tighten them to the specified torque. Tighten them in an even, crisscross pattern.
7. Avoid pinning the circular spline if possible, as it can reduce rotational precision and smoothness of operation.

Precautions on flexspline:

1. Mounting surfaces need to have adequate flatness, smoothness, and no distortion.
2. Especially in the area of the screw holes, burrs or foreign matter should not be present.
3. Please make sure chamfering and avoidance machining are performed on the housing assembly to avoid interference with the circular spline.
4. When mounting the bolts, make sure the bolt holes are correct and aligned. Bolts should rotate freely when tightening and should not have any irregularity due to misaligned or oblique bolt holes.
5. Don't tighten the bolts to the specified torque all at once. Tighten the bolts temporarily with about half the specified torque, then tighten them to the specified torque. Tighten them in an even, crisscross pattern.
6. Avoid unilateral meshing and deviation when assembling with the circular spline.


Rust prevention:

The complete assembly unit has no rust prevention treatment on the surface. If rust prevention is needed, please apply an anti-rust agent to the surface. Besides, if a specific anti-rust product is needed, please contact the authorized distributor.

PRECAUTIONS ON ASSEMBLY

Assembly accuracy of FS series

To make sure FS series play its excellent performance when assemble, please make sure to use the following accuracy.

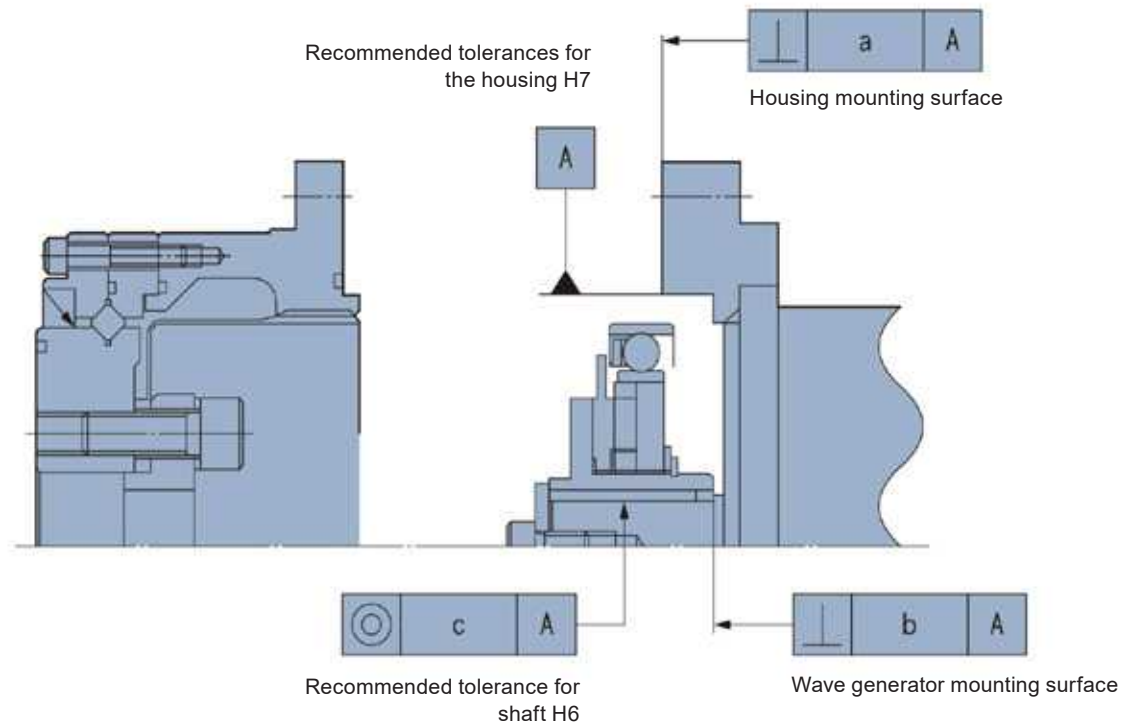

Recommended accuracy of the assembled housing

unit: mm


Symbol \ Model	5	8	11	14	17	20	25	32	40
a	0.008	0.01	0.011	0.011	0.015	0.017	0.024	0.026	0.026
b	—	—	—	0.017	0.02	0.02	0.024	0.024	0.032
	(0.005)	(0.006)	(0.007)	0.008	0.01	0.01	0.012	0.012	0.012
c	—	—	—	0.03	0.034	0.044	0.047	0.05	0.063
	(0.005)	(0.006)	(0.007)	0.016	0.018	0.019	0.022	0.022	0.024

* b.c is the value of the rigid type generator(I series)and the Oldham coupling generator(II series). The value in() is the value of the rigid type generator(I series).

PRECAUTIONS ON ASSEMBLY

Assembly accuracy of FH series

To make sure FH-I/II series play its excellent performance when assemble, please make sure to use the following accuracy.

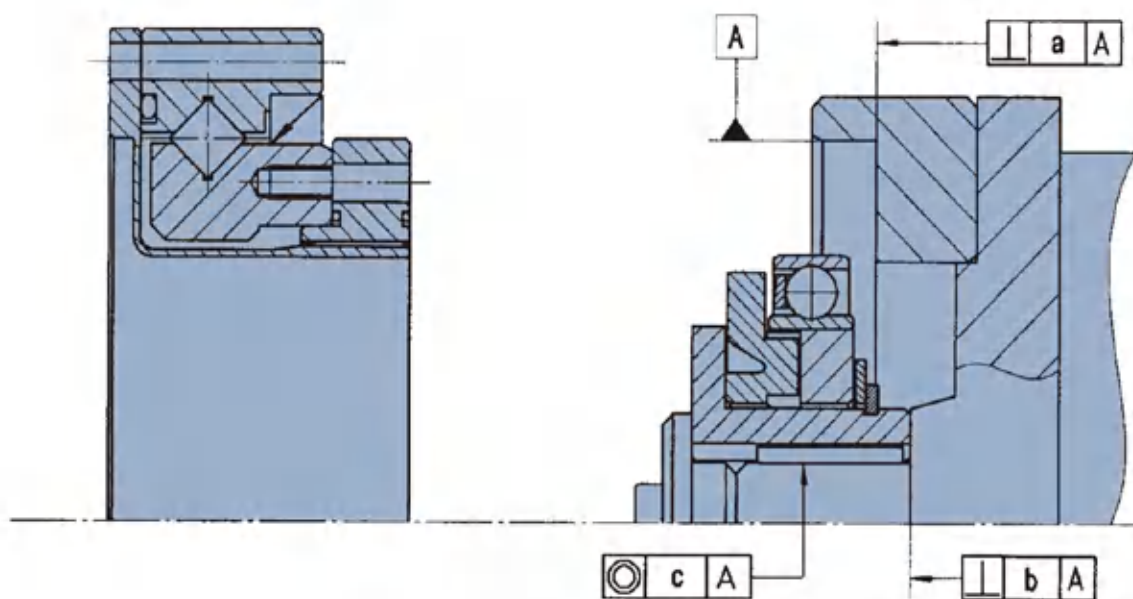

Recommended accuracy of the assembled housing

unit: mm

Symbol \ Model	8	11	14	17	20	25	32	40	45	50
a	0.01	0.011	0.011	0.015	0.017	0.024	0.026	0.026	0.027	0.028
b	—	—	0.017	0.02	0.02	0.024	0.024	0.032	0.032	0.032
	(0.006)	(0.007)	0.008	0.01	0.01	0.012	0.012	0.012	(0.012)	(0.015)
c	—	—	0.03	0.034	0.044	0.047	0.05	0.063	0.063	0.066
	(0.006)	(0.007)	0.016	0.018	0.019	0.022	0.022	0.024	(0.024)	(0.03)

* b.c is the value of the rigid type generator(I series)and the Oldham coupling generator(II series). The value in() is the value of the rigid type generator(I series).

PRECAUTIONS ON GREASE LUBRICANT


For Strain Wave Gear, the correct use of grease is essential to ensure normal operation and extend the service life of the gearbox. The following are the requirements for the use of grease in our company's Strain Wave Gear. Please follow these requirements when installing the gearbox.

Precautions for Using Grease

1. For type III and type IV gearboxes, the internal grease is already sealed before leaving the factory and can be installed and used directly without adding additional grease. For all Others Models, grease must be applied according to the corresponding requirements during installation.
2. Please use the special grease recommended by our company for Strain Wave Gear. Avoid mixing with Others greases, as different brands of grease may contain different additives and chemical components, which can cause chemical reactions, affecting the lubrication performance and service life of the gearbox.
3. Grease must be stored in a cool place, avoiding direct sunlight.
4. If grease has been stored for a long time, it needs to be stirred before use to avoid the separation of additives and base oil.
5. To prevent grease leakage, the input and output ends of the strain wave gearbox must be designed with strict sealing structures. For static sealing areas, it is recommended to use O-rings or sealant, and ensure that the sealing surface is not tilted or damaged. For dynamic sealing areas, it is recommended to use skeleton oil seals.
6. During the use of strain wave gearboxes, if the Wave generator is facing upwards and rotates in a fixed direction with a fixed load at low speed (input speed: less than 1000 r/min), poor lubrication may occur. In this case, increase the amount of grease injected or consult our company.
7. The performance of grease varies with temperature. To ensure the grease remains in good condition, maintain the grease temperature between -20°C and 130°C during use. If the grease temperature is found to be too high or too low, timely measures should be taken.
8. The wear of the moving parts in strain wave gearboxes is mainly affected by the performance of the grease. If conditions permit, the grease should be replaced after a cumulative working time of 3000 hours.

Grease Filling Quantity

When adding grease, ensure the appropriate amount is added, neither too much nor too little. Overfilling can cause leakage, while underfilling can reduce the service life of the Strain Wave Gear. Apply grease according to the following requirements for each Model.

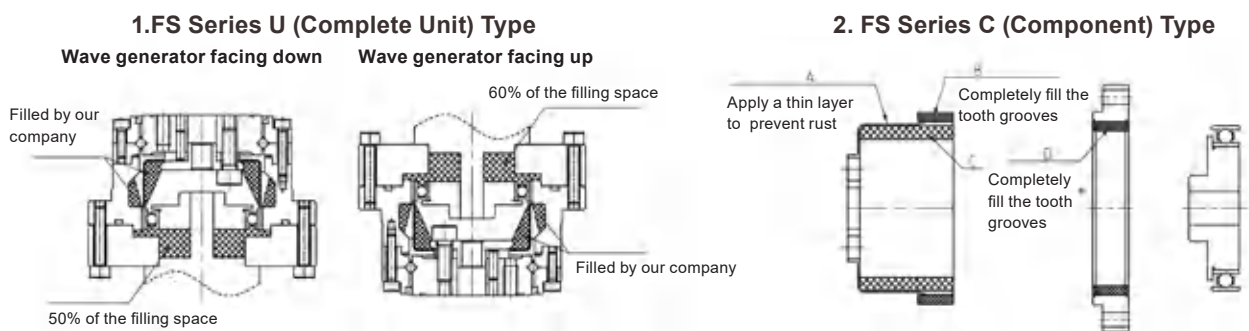

Regular FSS-U/C Grease Filling Amount (g)

Specification	A	B	C			D
			Horizontal Use	Wave generator facing down	Wave generator facing up	
11	0.2	0.2	2.9	3.5	4.4	0.2
14	0.3	0.3	5.5	7	8.5	0.3
17	0.5	0.5	10	12	14	0.5
20	0.8	0.8	16	18	21	0.8
25	1.5	1.5	30	35	40	1.5
32	3	3	60	70	80	3
40	5	5	110	125	145	5

* Note: The cavity between the gearbox and the mounting flange should refer to the FS Series U (Complete Unit) Type.


PRECAUTIONS ON GREASE LUBRICANT

Ultra flat FSD Grease Filling Amount (g)

Specification	A	B	C			D
			Horizontal Use	Wave generator facing down	Wave generator facing up	
14	0.2	0.2	3.5	3.9	4.6	0.2
17	0.3	0.3	5.2	6	7.1	0.3
20	0.5	0.5	9	10	12	0.5
25	1	1	17	19	22	1
32	2	2	37	42	48	2

* Note: The cavity between the gearbox and the mounting flange should refer to the FS Series U (Complete Unit) Type.

3. FH Series U (Complete Unit) Type

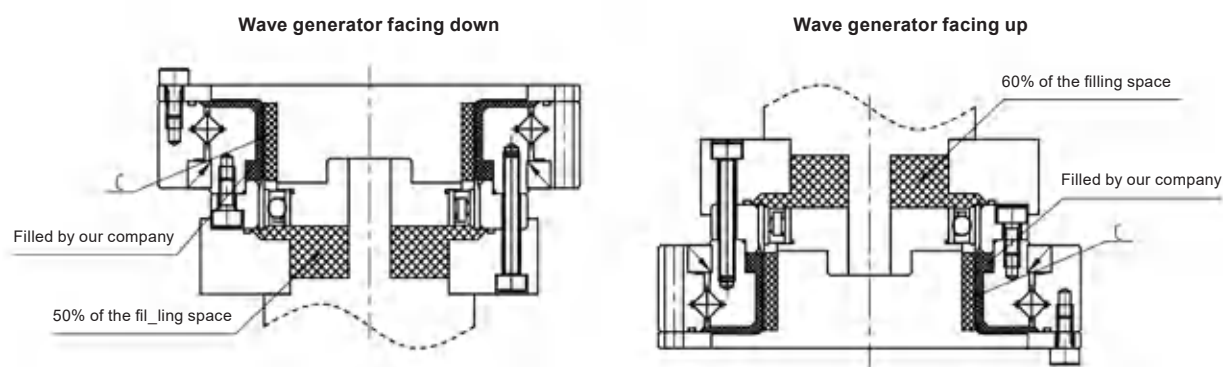

Regular Grease Filling Amount (g)


Specification	Horizontal Use	Wave generator facing down	Wave generator facing up
11	3.2	4	4.8
14	5.8	7.5	8.9
17	11	13	15
20	18	19	22
25	32	37	42
32	64	74	84
40	120	130	150

Ultra-Short Cylinder Grease Filling Amount (g)

Specification	C
14	5
17	9
20	13
25	24
32	51

PRECAUTIONS ON GREASE LUBRICANT

FH Series C (Component) Type

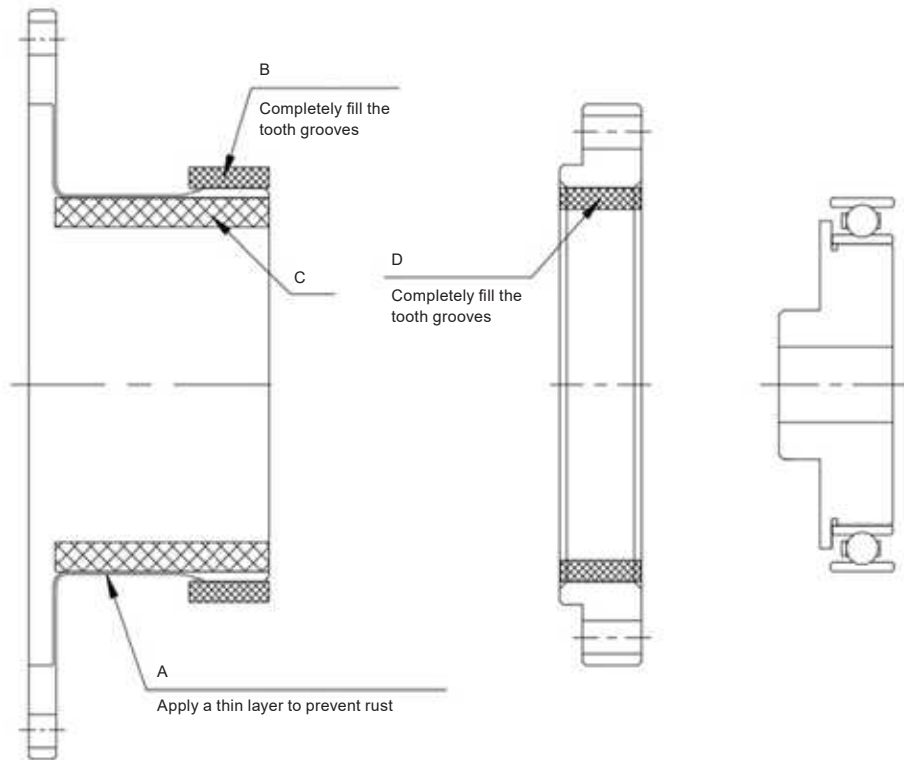

Regular Grease Filling Amount (g)

Specification	A	B	C			D
			Horizontal Use	Wave generator facing down	Wave generator facing up	
11	0.2	0.2	3.2	4	4.8	0.2
14	0.3	0.3	5.8	7.5	8.9	0.3
17	0.5	0.5	11	13	15	0.5
20	0.8	0.8	18	19	22	0.8
25	1.5	1.5	32	37	42	1.5
32	3	3	64	74	84	3
40	5	5	120	130	150	5

* Note: The cavity between the gearbox and the mounting flange should refer to the FH Series U (Complete Unit) Type.

Ultra flat FHD Grease Filling Amount (g)

Specification	A	B	C	D
14	0.2	0.2	5	0.2
17	0.3	0.3	9	0.3
20	0.5	0.5	13	0.5
25	1	1	24	1
32	2	2	51	2

* Note: The cavity between the gearbox and the mounting flange should refer to the FH Series U (Complete Unit) Type.

SEALING MECHANISM

Model	Specification	Circular spline		Flexspline	
		Seal Dimensions	Groove Dimensions	Seal Dimensions	Groove Dimensions
FHT-I	11	30*0.5	The seal groove on the Circular Spline is already machined. NO further machining is required by the client.	46*1	$\varnothing 46_{-0.1}^0 \cdot \varnothing 48.6_{+0.1}^0 \cdot 0.75_{+0.1}^0$
	14	36.5*0.6	$\varnothing 36.5_{-0.1}^0 \cdot \varnothing 38_{+0.1}^0 \cdot 0.45_{+0.1}^0$	53*1.5	$\varnothing 53_{-0.1}^0 \cdot \varnothing 56.8_{+0.1}^0 \cdot 1.15_{+0.1}^0$
	17	45*1	$\varnothing 45_{-0.1}^0 \cdot \varnothing 48_{+0.1}^0 \cdot 0.75_{+0.1}^0$	64*1	$\varnothing 64_{-0.1}^0 \cdot \varnothing 66.6_{+0.1}^0 \cdot 0.75_{+0.1}^0$
FHT-II	20	54*1	$\varnothing 53_{-0.1}^0 \cdot \varnothing 56.2_{+0.1}^0 \cdot 0.75_{+0.1}^0$	73*1.5	$\varnothing 73_{-0.1}^0 \cdot \varnothing 76.8_{+0.1}^0 \cdot 1.15_{+0.1}^0$
	25	68*1	$\varnothing 68_{-0.1}^0 \cdot \varnothing 70.6_{+0.1}^0 \cdot 0.75_{+0.1}^0$	90*1.5	$\varnothing 90_{-0.1}^0 \cdot \varnothing 94.2_{+0.1}^0 \cdot 1.15_{+0.1}^0$
	32	88*1.5	$\varnothing 88_{-0.1}^0 \cdot \varnothing 92_{+0.1}^0 \cdot 1.15_{+0.1}^0$	119*1.5	$\varnothing 119_{-0.1}^0 \cdot \varnothing 123.1_{+0.1}^0 \cdot 1.15_{+0.1}^0$
FHT-V	40	108*1.75	$\varnothing 108_{-0.1}^0 \cdot \varnothing 113_{+0.1}^0 \cdot 1.5_{+0.1}^0$	143*2	$\varnothing 142.6_{-0.1}^0 \cdot \varnothing 148_{+0.1}^0 \cdot 1.5_{+0.1}^0$
	45	123*2	The seal groove on the Circular Spline is already machined. NO further machining is required by the client.	164*2	$\varnothing 163.8_{-0.1}^0 \cdot \varnothing 169_{+0.1}^0 \cdot 1.5_{+0.1}^0$
	50	136*2		183*2	$\varnothing 182.8_{-0.1}^0 \cdot \varnothing 188_{+0.1}^0 \cdot 1.5_{+0.1}^0$
FHD-I	8	21*0.5	The seal groove on the Circular Spline is already machined. NO further machining is required by the client.	—	The groove space on this side is insufficient. Please use sealant during assembly.
	11	—	The groove space on this side is insufficient. Please use sealant during assembly.	—	
	14	36.5*0.6	The seal groove on the Circular Spline is already machined. NO further machining is required by the client.	53*1.5	$\varnothing 53_{-0.1}^0 \cdot \varnothing 56.8_{+0.1}^0 \cdot 1.15_{+0.1}^0$
	17	45*1		64*1	$\varnothing 64_{-0.1}^0 \cdot \varnothing 66.6_{+0.1}^0 \cdot 0.75_{+0.1}^0$
	20	54*0.8		73*1.5	$\varnothing 73_{-0.1}^0 \cdot \varnothing 76.8_{+0.1}^0 \cdot 1.15_{+0.1}^0$
	25	67*1		90*1.5	$\varnothing 90_{-0.1}^0 \cdot \varnothing 94.2_{+0.1}^0 \cdot 1.15_{+0.1}^0$
	32	87*1		119*1.5	$\varnothing 119_{-0.1}^0 \cdot \varnothing 123.1_{+0.1}^0 \cdot 1.15_{+0.1}^0$

In order to give full play to the excellent performance of FHT-I/II, please ensure the recommended accuracy as shown in the figure.

ON THE SCREW

All connecting and fixing screws shall be of grade 12.9 and coated with thread locker to prevent screw failure or looseness during operation. Refer to the table below for the screw locking force.

Specification	M3	M4	M5	M6	M8	M10	M12
Locking torque value(Nm)	2.4	5.4	10.8	18.5	45	89	154

CHECKING MAIN ROLLER BEARING

A precision cross roller bearing is built in the unit type and the gear head type to directly support the external load (output flange) (precision 4-point contact ball bearing for the FSN- mini series).Check the maximum load moment load, lifespan of the bearing and static safety coefficient to fully bring out the performance of the unit type.


See the corresponding pages on each series for main shaft bearing.

How to obtain the maximum load moment load

Maximum load moment load (M_{max}) is obtained as follows. Make sure that M_{ma} M_c (Allowable static torque M_e refer to the main bearing specification table of each series).

$$M_{max} = Fr_{max}(L_r + R) + Fa_{max} \cdot L_a$$

External Load influence diagram

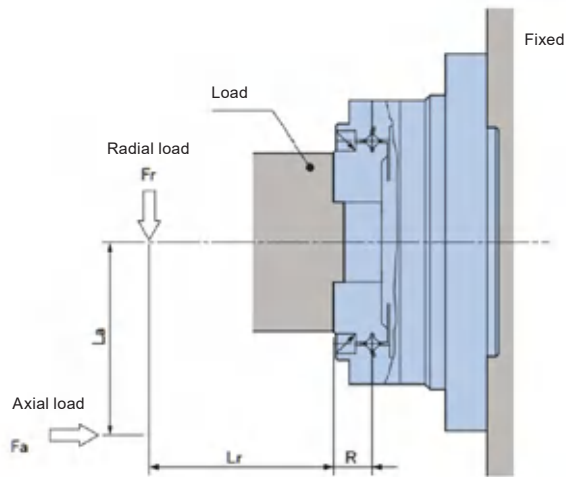

Fr_{max}	Max. radial load	N(kgf)	Refer to above figure
Fa_{max}	Max.axial load	N(kgf)	Refer to above figure
L_r, L_a	—	m	Refer to above figure
R	Offset amount	m	See above figure and 'Specification of the main roller bearing' of each series.

MAIN ROLLER BEARING SPECIFICATIONS

Specification of FS series

Type	Pitch circle diameter of a roller	The bias amount R	Basic rated load				Allowable static moment Mc	
			Basic rated dynamic load Cr		Basic rated static load Cr			
	m	m	KN	Kgf	KN	Kgf	Nm	Kgfm
5	0.0135	0.00485	0.914	93	0.763	78	0.89	0.09
8	0.0205	0.0073	2.16	220	1.9	194	3.46	0.35
11	0.02715	0.009	3.89	397	3.54	361	6.6	0.67
14	0.035	0.0095	4.7	480	6.07	620	41	4.2
17	0.0425	0.0095	5.3	540	7.55	770	64	6.5
20	0.05	0.0095	5.8	590	9.0	920	91	9.3
25	0.062	0.0115	9.6	980	15.1	1540	156	16
32	0.08	0.013	15	1530	25.0	2550	313	32
40	0.096	0.0145	21	2170	36.5	3720	450	46

Specification of FSD series

Type	Pitch circle diameter of a roller	The bias amount R	Basic rated load				Allowable static moment Mc	
			Basic rated dynamic load Cr		Basic rated static load Cr			
	m	m	KN	Kgf	KN	Kgf	Nm	Kgfm
14	0.035	0.0095	4.7	480	6.07	620	41	4.2
17	0.0425	0.0099	5.3	540	7.55	770	64	6.5
20	0.05	0.0102	5.8	590	9.0	920	91	9.3
25	0.062	0.013	9.6	980	15.1	1540	156	16
32	0.08	0.0144	15	1530	25	2550	313	32

Specification of FFS series

Type	Pitch circle diameter of a roller	The bias amount R	Basic rated load				Allowable static moment Mc	
			Basic rated dynamic load Cr		Basic rated static load Cr			
	m	m	KN	Kgf	KN	Kgf	Nm	Kgfm
11	0.0425	0.014	6.5	663	9.9	1010	40	4.1
14	0.0541	0.014	7.4	755	12.8	1306	75	7.7

★ The basic rated dynamic load refers to the constant radial load under which the bearing is expected to achieve a basic rating life of 1 million revolutions.

★ The basic rated static load refers to the static load that produces a specified level of contact stress (4 kN/mm²) at the central contact point between the location of maximum bearing load and the raceway surface.

★ The allowable static moment refers to the maximum permissible torque applied to the output bearing, within which the bearing can operate properly and maintain its basic performance.

MAIN ROLLER BEARING SPECIFICATIONS

Specification of FH series

Each product is assembled with precise cross roller bearing for supporting external loading(Output flange).

Type	Pitch circle diameter of a roller	The bias amount R	Basic rated load				Allowable static moment Mc	
			Basic rated dynamic load Cr		Basic rated static load Cr			
	m	m	KN	Kgf	KN	Kgf	Nm	Kgfm
11	0.043	0.018	5.29	540	7.55	770	74	7.6
14	0.05	0.0217	5.8	590	8.6	880	74	7.6
17	0.06	0.0239	10.4	1060	16.3	1670	124	12.6
20	0.07	0.0255	14.6	1490	22	2250	187	19.1
25	0.085	0.0296	21.8	2230	35.8	3660	258	26.3
32	0.111	0.0364	38.2	3900	65.4	6680	580	59.1
40	0.133	0.044	43.3	4410	81.6	8330	849	86.6
45	0.154	0.0475	77.6	7920	135	13800	1127	115
50	0.170	0.0525	81.6	8330	149	15300	1487	152

Specification of FHD series

Type	Pitch circle diameter of a roller	The bias amount R	Basic rated load				Allowable static moment Mc	
			Basic rated dynamic load Cr		Basic rated static load Cr			
	m	m	KN	Kgf	KN	Kgf	Nm	Kgfm
8	0.0309	0.0069	1.4	143	1.8	183	10	1
11	0.0401	0.009	2.3	234	3.2	326	30	3.1
14	0.0503	0.0111	2.9	296	4.3	438	37	3.8
17	0.061	0.0115	5.2	530	8.1	826	62	6.3
20	0.07	0.011	7.3	744	11	1122	93	9.5
25	0.086	0.0121	10.9	1111	17.9	1825	129	13.2
32	0.112	0.0173	19.1	1948	32.7	3334	290	29.6

- ★ The basic rated dynamic load refers to the constant radial load under which the bearing is expected to achieve a basic rating life of 1 million revolutions.
- ★ The basic rated static load refers to the static load that produces a specified level of contact stress (4 kN/mm²) at the central contact point between the location of maximum bearing load and the raceway surface.
- ★ The allowable static moment refers to the maximum permissible torque applied to the output bearing, within which the bearing can operate properly and maintain its basic performance.

ON STARTING TORQUE

Recommended accuracy of the assembled housing

unit: cNm

Type Reduction ratio	5	8	11	14	17	20	25	32	40
50	0.4	0.8	2	4.1	6.1	7.8	15	31	55
80	—	—	—	2.8	4	4.9	9.2	19	35
100	0.3	0.59	1.5	2.5	3.4	4.3	8	18	31
120	—	—	—	2.3	3.1	3.8	7.3	15	28
160	—	—	—	—	—	3.3	7.3	14	24

Starting torque of FSG series

unit: cNm

Type Reduction ratio	11	14	17	20	25	32	40
50	—	4.5	6.7	8.6	17	34	61
80	—	3.1	4.4	5.4	10	21	39
100	—	2.8	3.7	4.7	8.8	20	34
120	—	—	3.4	4.2	8	17	31
160	—	—	—	3.6	6.9	15	26

Starting torque of FSD series

unit: cNm

Type Reduction ratio	11	14	17	20	25
50	4.4	6.7	8.9	16	32
80	3.2	4.4	5.7	10	22
100	2.8	3.8	5.1	9.1	20

Starting torque of FHT series (FHT/FHN-I/II/V)

unit: cNm

Type Reduction ratio	11	14	17	20	25	32	40
50	2.0	4.1	6.1	7.8	15	31	55
80	1.8	2.8	4.0	4.9	9.2	19	35
100	1.5	2.5	3.4	4.3	8.0	18	31
120	—	—	3.1	3.8	7.3	15	28
160	—	—	—	3.3	7.3	14	24

Starting torque of FHT series (FHT/FHG-III)

unit: cNm

Type Reduction ratio	11	14	17	20	25	32	40	45	50
50	7.1	8.8	27	36	56	85	136	—	—
80	—	7.5	25	33	50	74	117	138	179
100	5.9	6.9	24	32	49	72	112	131	171
120	—	—	24	31	48	68	110	126	165
160	—	—	—	31	47	67	105	—	—

ON STARTING TORQUE

Starting torque of FHT series (FHT/FHG-IV)

unit: cNm

Reduction ratio \ Type	11	14	17	20	25	32	40
50	—	5.7	9.7	14	22	41	72
80	—	4.4	7.2	11	15	29	52
100	—	3.7	6.5	9.9	14	27	47
120	—	—	6.2	9.3	13	24	44
160	—	—	—	8.6	12	23	39

Starting torque of FHG series (FHG-I/II/V)

unit: cNm

Reduction ratio \ Type	11	14	17	20	25	32	40	45	50
50	—	4.5	6.7	8.6	17	34	61	—	—
80	—	3.1	4.4	5.4	10	21	39	54	73
100	—	2.8	3.7	4.7	8.8	20	34	47	64
120	—	—	3.4	4.2	8	17	31	43	57
160	—	—	—	3.6	6.9	15	26	—	—

Starting torque of FHD-I series

unit: cNm

Reduction ratio \ Type	8	11	14	17	20	25	32
50	1	2.4	6.2	19	25	39	60
80	—	—	5	16	23	36	55
100	0.8	1.5	4.8	17	22	34	50

Starting torque of FHD-III series


unit: cNm

Reduction ratio \ Type	14	17	20	25	32
50	11	39	53	79	114
80	9	34	44	66	108
100	8.7	37	49	73	101

Starting torque of FFS series

unit: cNm

Reduction ratio \ Type	11	14
50	2	4.1
80	2	2.8
100	1.5	2.5

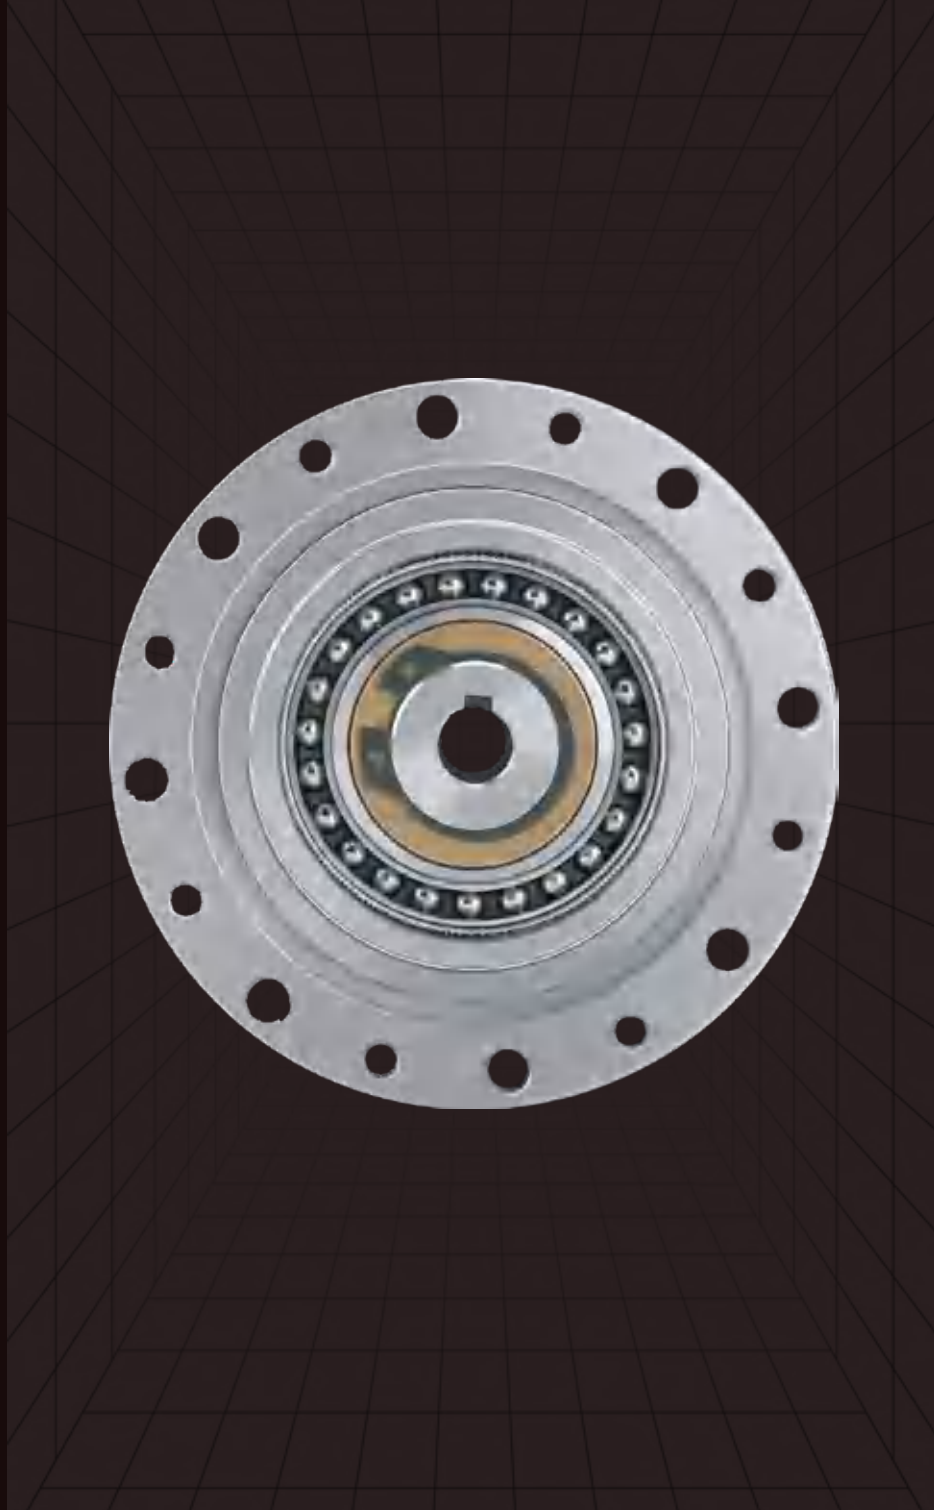

FS **SERIES**

INTRODUCTION OF FSS/FSN/FSG



FSS/FSG-C-I




FSS/FSN/FSG-I



FSS/FSG-II

Unit type structure of FS series

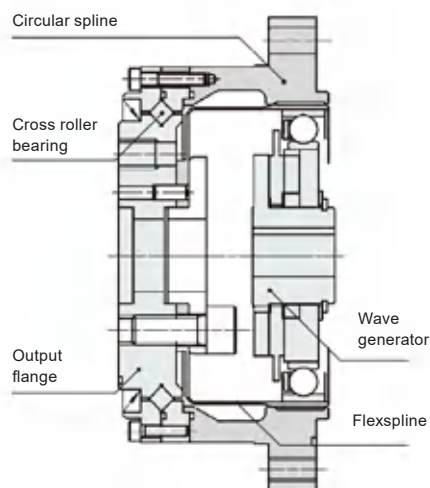

Standard Type(FSS-I/II)

FSS/FSN/FSG

FSS-C series

Component cup type, comprising flexspline, circular spline and a Wave generator, are ideal for applications where specific space and mass constraints exist. It demands high installation precision.

FSS series

FSS Unit type are easy to install, each Model featuring high rigidity crossed roller bearings.

FSN series

A light weight product. Compare with standard product that with the same performance, FSN series is 30% lighter.

FSG series

High torque. Compare with standard products, FSG series' torque capacity is 30% higher. And the service life is increased by 43%, with high load capacity and high reliability.

Application

- Industrial Robot
- Service Robots
- Metal Machine Tools
- Medical Devices
- Analysis, Test Equipment
- Energy Related Equipment
- Papermaking Equipment

TECHNICAL DATA OF FSS/FFS/FSN

Rating table of FSS/FFS/FSN

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed Grease lubricant	Permissible ave. input rotational speed Grease lubricant	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
5	50	0.4	0.04	0.9	0.09	0.53	0.05	1.8	0.18	10000	6500	≤60	0.025	10000
	100	0.6	0.06	1.4	0.14	0.94	0.1	2.7	0.28					10000
8	50	1.8	0.18	3.3	0.34	2.3	0.23	6.6	0.67	8500	3500	≤30	FSN-I: 0.08	10000
	100	2.4	0.24	4.8	0.49	3.3	0.34	9	0.92					10000
11	50	3.5	0.36	8.3	0.85	5.5	0.56	17	1.73	8500	3500	≤30	FSS-I: 0.13 FSN-I: 0.17	10000
	100	5	0.51	11	1.12	8.9	0.91	25	2.55					10000
14	50	5.4	0.55	18	1.8	6.9	0.7	35	3.6	8500	3500	≤20	FSS-I/II: 0.51 FSS-C: 0.09 FSN-I/II: 0.39 FSSF-I: 0.51	10000
	80	7.8	0.8	23	2.4	11	1.1	47	4.8					15000
	100	7.8	0.8	28	2.9	11	1.1	54	5.5					15000
17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤20	FSS-I/II: 0.67 FSS-C: 0.15 FSN-I/II: 0.52 FSSF-I: 0.67	10000
	80	22	2.2	43	4.4	27	2.7	87	8.9					15000
	100	24	2.4	54	5.5	39	4	108	11					15000
	120	24	2.4	54	5.5	39	4	86	8.8					15000
20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤20	FSS-I/II: 0.96 FSS-C: 0.28 FSN-I/II: 0.73 FSSF-I: 0.96	10000
	80	34	3.5	74	7.5	47	4.8	127	13					15000
	100	40	4.1	82	8.4	49	5	147	15					15000
	120	40	4.1	87	8.9	49	5	147	15					15000
	160	40	4.1	92	9.4	49	5	147	15					15000
25	50	39	4	98	10	55	5.6	186	19	5600	3500	≤20	FSS-I/II: 1.46 FSS-C: 0.42 FSN-I/II: 1.14 FSSF-I: 1.46	10000
	80	63	6.4	137	14	87	8.9	255	26					15000
	100	67	6.8	157	16	108	11	284	29					15000
	120	67	6.8	167	17	108	11	304	31					15000
	160	67	6.8	176	18	108	11	314	32					15000
32	50	76	7.8	216	22	108	11	382	39	4800	3500	≤20	FSS-I/II: 3.11 FSS-C: 0.89 FSN-I/II: 2.47	10000
	80	118	12	304	31	167	17	568	58					15000
	100	137	14	333	34	216	22	647	66					15000
	120	137	14	353	36	216	22	686	70					15000
	160	137	14	372	38	216	22	686	70					15000
40	50	137	14	402	41	196	20	686	70	4000	3000	≤20	FSS-I/II: 4.6 FSS-C: 1.7 FSN-I/II: 3.64 FSSF-I: 4.6	10000
	80	206	21	519	53	284	29	980	100					15000
	100	265	27	568	58	372	38	1080	110					15000
	120	294	30	617	63	451	46	1180	120					15000
	160	294	30	647	66	451	46	1180	120					15000

TECHNICAL DATA OF FSG

Rating table of FSG

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed (Grease lubricant)	Permissible ave. input rotational speed (Grease lubricant)	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
14	50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤20	FSS-I/II:0.51	10000
	80	10	1	30	3.1	14	1.4	58 ^[1]	5.9 ^[1]					15000
	100	10	1	36	3.7	14	1.4	58 ^[1]	5.9 ^[1]					15000
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤20	FSG-I/II:0.67	10000
	80	29	2.9	56	5.7	35	3.6	109 ^[1]	11 ^[1]					15000
	100	31	3.2	70	7.2	51	5.2	109 ^[1]	11 ^[1]					15000
	120	31	3.2	70	7.2	51	5.2	109 ^[1]	11 ^[1]					15000
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤20	FSG-I/II:0.96	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤20	FSG-I/II:1.46	10000
	80	82	8.4	178	18	113	12	332	34					15000
	100	87	8.9	204	21	140	14	369	38					15000
	120	87	8.9	217	22	140	14	395	40					15000
	160	87	8.9	229	23	140	14	408	42					15000
32	50	99	10	281	29	140	14	497	51	4800	3500	≤20	FSG-I/II:3.11	10000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	178	18	484	49	281	29	892	91					15000
40	50	178	18	523	53	255	26	892	91	4000	3000	≤20	FSG-I:4.60	10000
	80	268	27	675	69	369	38	1270	130					15000
	100	345	35	738	75	484	49	1400	143					15000
	120	382	39	802	82	586	60	1510 ^[1]	154 ^[1]					15000
	160	382	39	841	86	586	60	1510 ^[1]	154 ^[1]					15000

★ The permissible maximum torque is limited by the driving torque of the coupling screw at the output end.

TECHNICAL DATA OF FSS/FFS/FSN/FSG

Angle transmission accuracy

unit: arc min

Reduction ratio \ Type	5	8	11	14	17	20	25	32	40
50	3	2	2	1.5	1.5	1	1	1	1
above 50	3	2	2	1.5	1.5	1	1	1	1

Hysteresis loss

unit: arc min


Reduction ratio \ Type	5	8	11	14	17	20	25	32	40
50	3	3	2	2	2	2	2	2	2
above 50	3	2	2	1	1	1	1	1	1

Torsional stiffness


Project		Type \ Unit	5	8	11	14	17	20	25	32	40
T1		Nm	0.075	0.29	0.8	2	3.9	7	14	29	54
T2		Nm	0.22	0.75	2	6.9	12	25	48	108	196
Reduction ratio 50	K1	$\times 10^4 \text{ Nm/rad}$	0.013	0.044	0.221	0.34	0.81	1.3	2.5	5.4	10
	K2	$\times 10^4 \text{ Nm/rad}$	0.018	0.067	0.3	0.47	1.1	1.8	3.4	7.8	14
	K3	$\times 10^4 \text{ Nm/rad}$	0.025	0.084	0.32	0.57	1.3	2.3	4.4	9.8	18
Reduction ratio above 50	K1	$\times 10^4 \text{ Nm/rad}$	0.02	0.09	0.267	0.47	1	1.6	3.1	6.7	13
	K2	$\times 10^4 \text{ Nm/rad}$	0.027	0.104	0.333	0.61	1.4	2.5	5	11	20
	K3	$\times 10^4 \text{ Nm/rad}$	0.03	0.12	0.432	0.71	1.6	2.9	5.7	12	23

OUTLINE DRAWING

FSS-8-XX-C-I

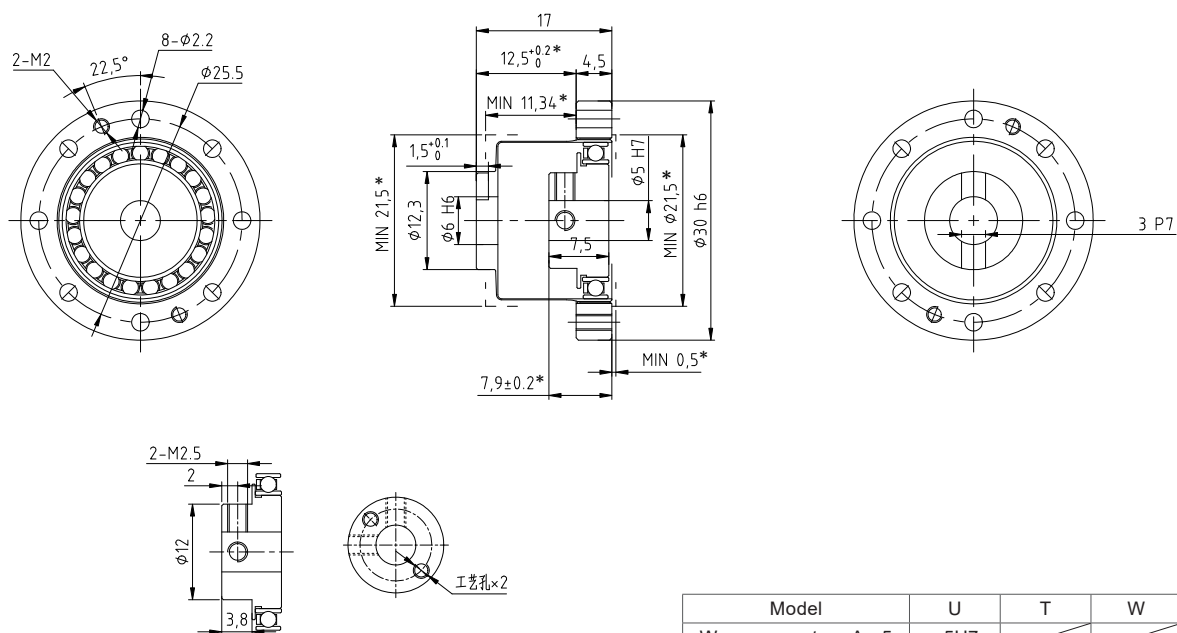

FSS-11-XX-C-I

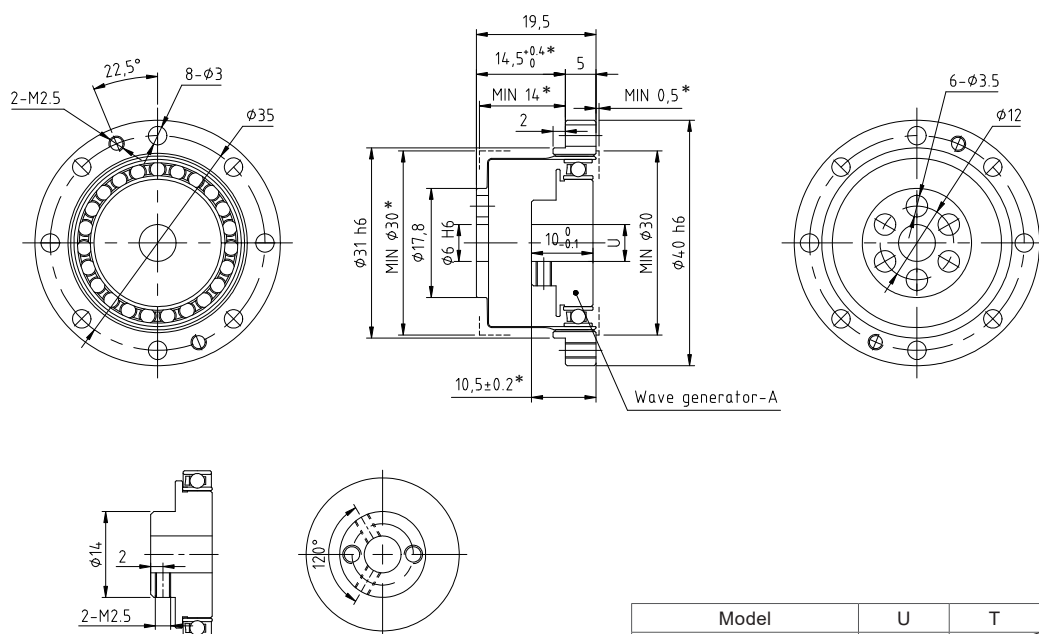


FSS-8-XX-C-I
FSS-11-XX-C-I

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
8	50	1.8	0.18	3.3	0.34	2.3	0.23	6.6	0.67	8500	3500	≤ 30	0.08	10000
	100	2.4	0.24	4.8	0.49	3.3	0.34	9	0.92					10000
11	50	3.5	0.36	8.3	0.85	5.5	0.56	17	1.73	8500	3500	≤ 30	0.13	10000
	100	5	0.51	11	1.12	8.9	0.91	25	2.55					10000


OUTLINE DRAWING

FSS-14-XX-C-I

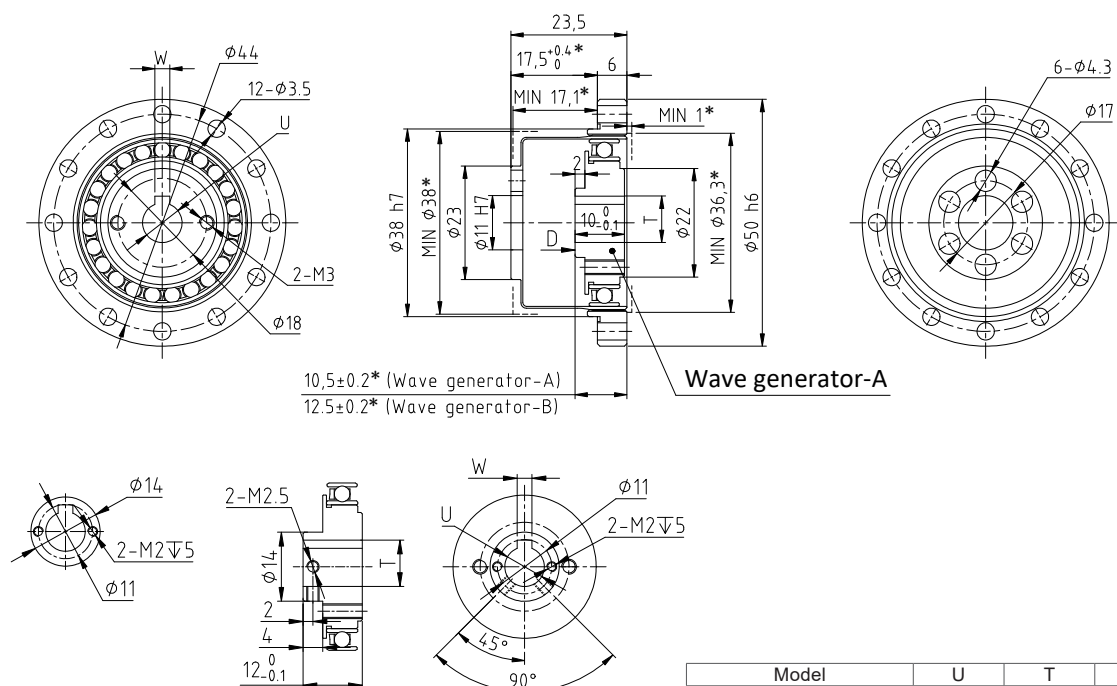

Model	U	T	W
Wave generator - A $\phi 6$	$\phi 6H7$	$7_{-0}^{+0.1}$	2JS9/P9
Wave generator - A $\phi 8$	$\phi 8H7$	$9.4_{-0}^{+0.1}$	3JS9/P9

FSS-17-XX-C-I

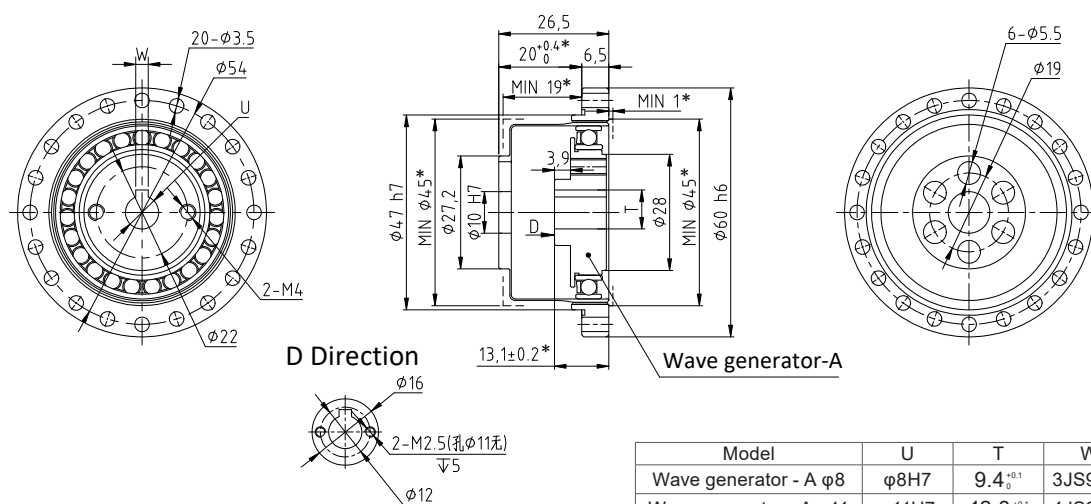


Model	U	T	W
Wave generator - A $\varphi 8$	$\varphi 8H7$	$9.4_{-0}^{+0.1}$	3JS9/P9
Wave generator - A $\varphi 11$	$\varphi 11H7$	$12.8_{-0}^{+0.1}$	4JS9/P9


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
14	50	5.4	0.55	18	18	6.9	0.7	35	3.6	8500	3500	≤20	0.09	10000
	80	7.8	0.8	23	2.4	11	1.1	47	4.8					15000
	100	7.8	0.8	28	2.9	11	1.1	54	5.5					15000
17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤20	0.15	10000
	80	22	2.2	43	4.4	27	2.7	87	8.9					15000
	100	24	2.4	54	5.5	39	4	108	11					15000
	120	24	2.4	54	5.5	39	4	86	8.8					15000

OUTLINE DRAWING

FSS-20-XX-C-I

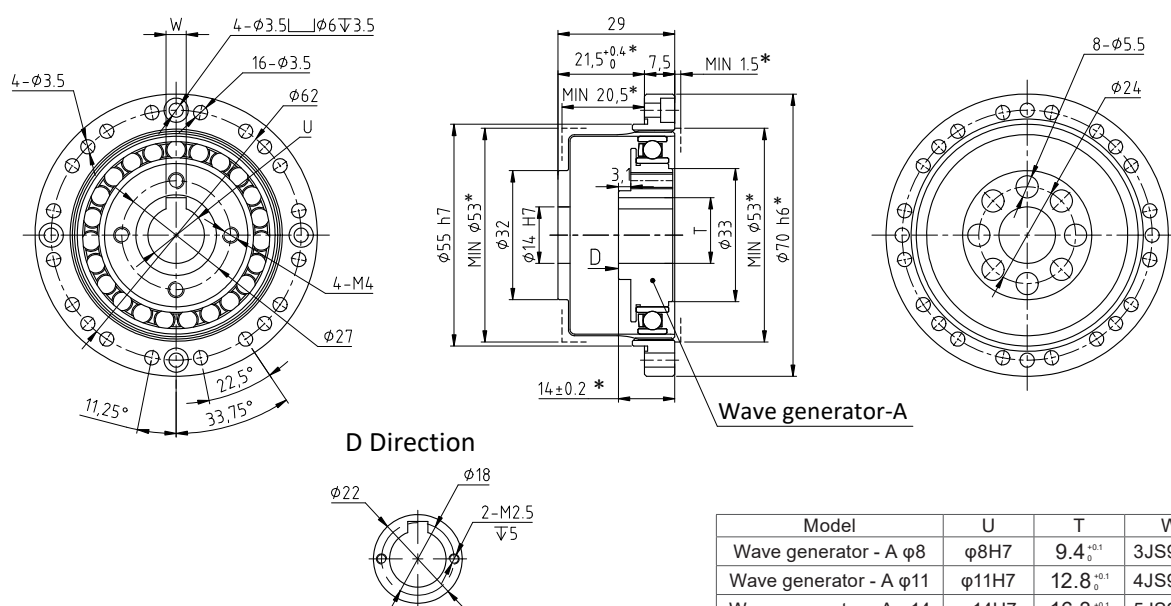


FSS-25-XX-C-I

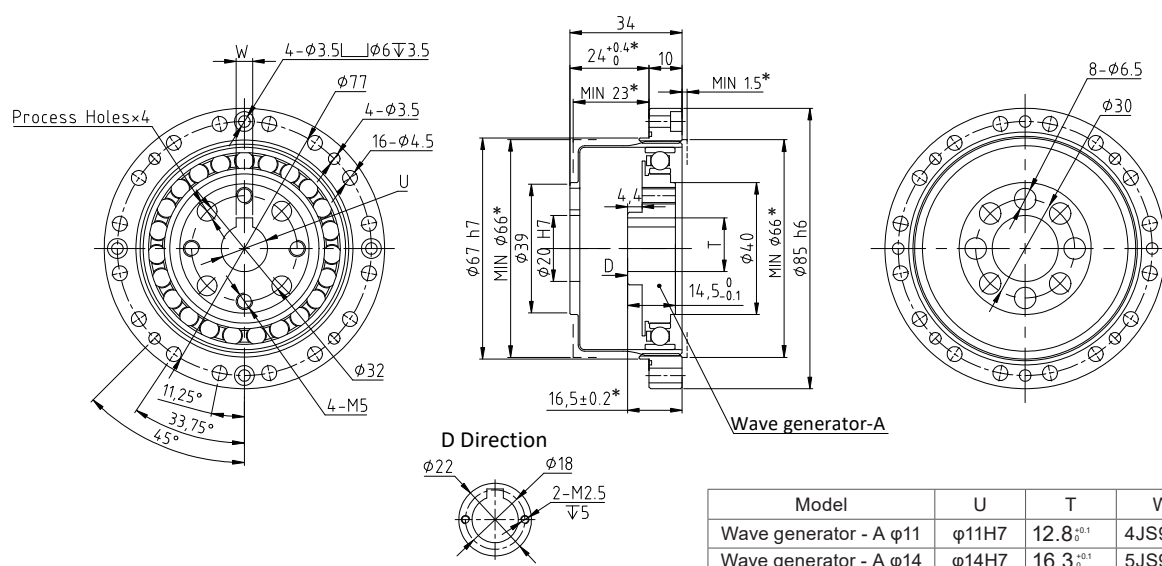


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤20	0.28	10000
	80	34	3.5	74	7.5	47	4.8	127	13					15000
	100	40	4.1	82	8.4	49	5	147	15					15000
	120	40	4.1	87	8.9	49	5	147	15					15000
	160	40	4.1	92	9.4	49	5	147	15					15000
25	50	39	4	98	10	55	5.6	186	19	5600	3500	≤20	0.42	10000
	80	63	6.4	137	14	87	8.9	255	26					15000
	100	67	6.8	157	16	108	11	284	29					15000
	120	67	6.8	167	17	108	11	304	31					15000
	160	67	6.8	176	18	108	11	314	32					15000

OUTLINE DRAWING

FSS-32-XX-C-I

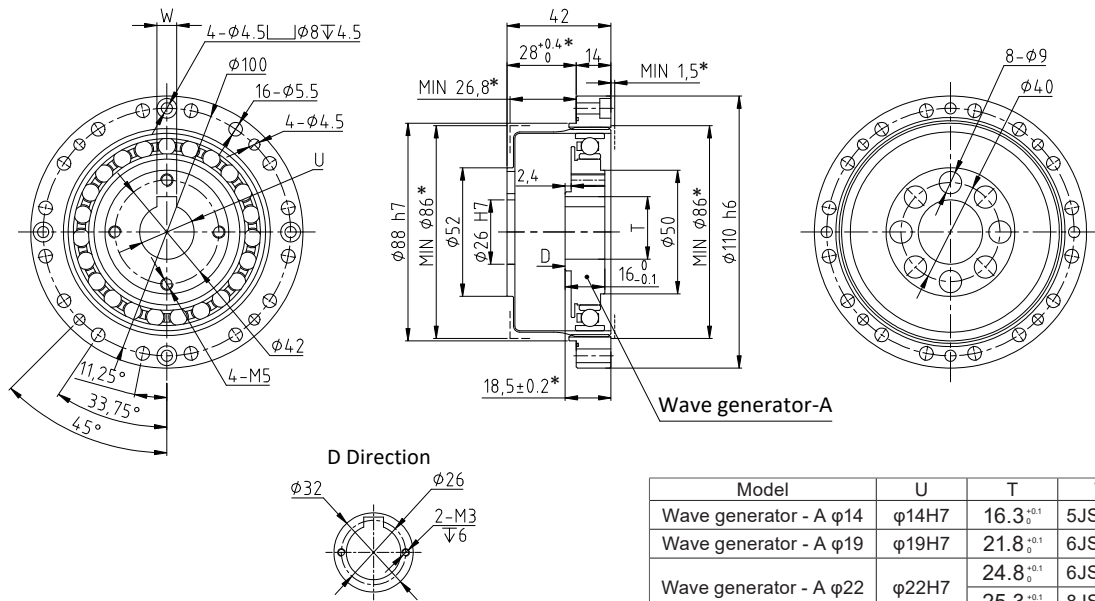


FSS-40-XX-C-I

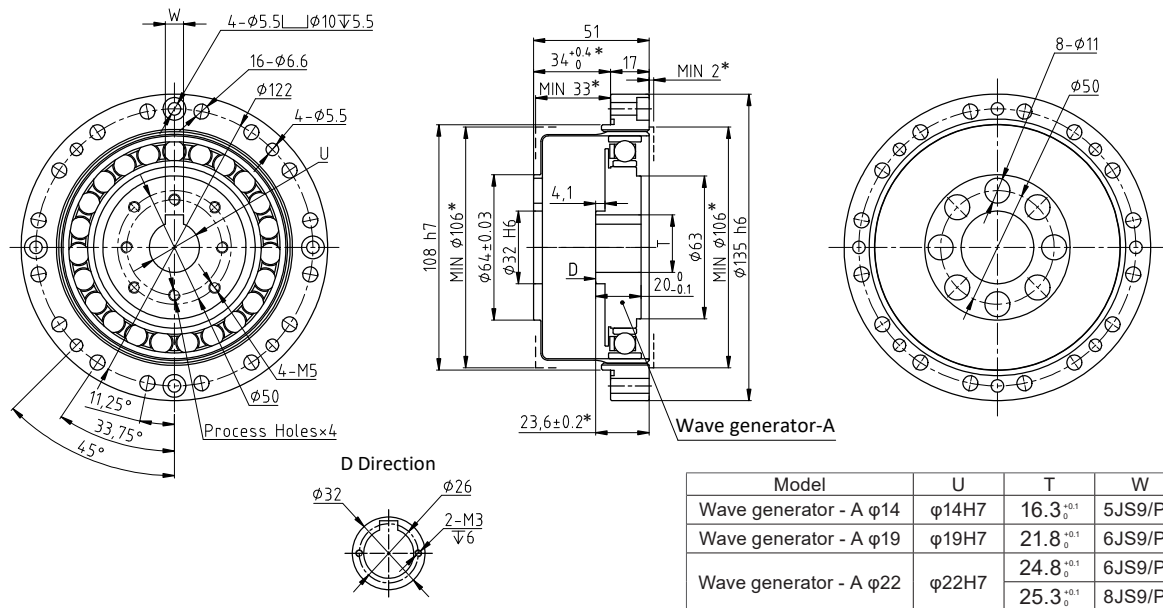


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
32	50	76	7.8	216	22	108	11	382	39	4800	3500	≤20	0.89	10000
	80	118	12	304	31	167	17	568	58					15000
	100	137	14	333	34	216	22	647	66					15000
	120	137	14	353	36	216	22	686	70					15000
	160	137	14	372	38	216	22	686	70					15000
40	50	137	14	402	41	196	20	686	70	4000	3000	≤20	1.7	10000
	80	206	21	519	53	284	29	980	100					15000
	100	265	27	568	58	372	38	1080	110					15000
	120	294	30	617	63	451	46	1180	120					15000
	160	294	30	647	66	451	46	1180	120					15000

OUTLINE DRAWING

FSS-14-XX-U-I

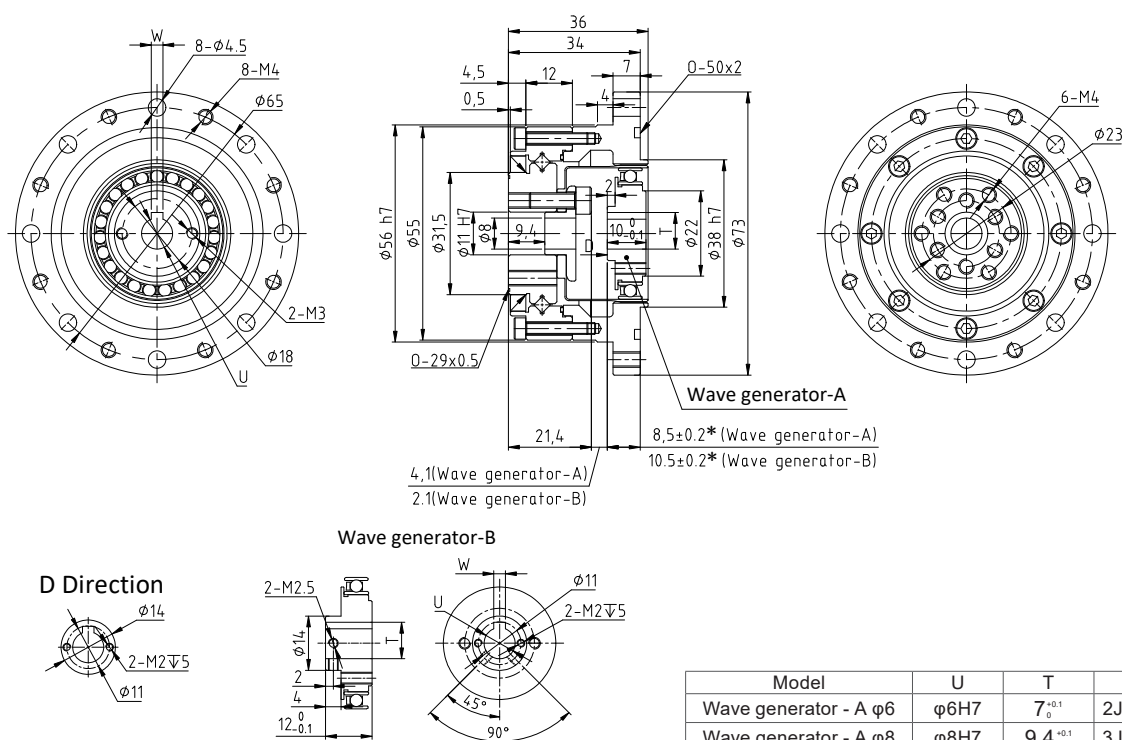

FSS-14-XX-U-I-LF

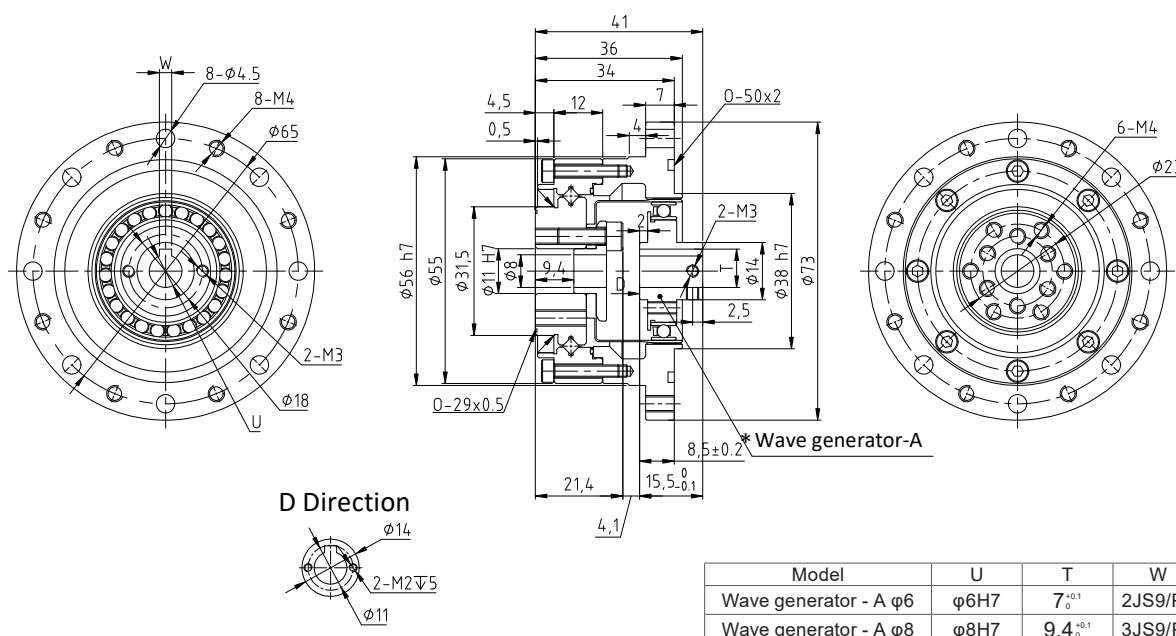


FSS-14-XX-U-I
FSS-14-XX-U-I-LF


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
14	50	5.4	0.55	18	18	6.9	0.7	35	3.6	8500	3500	≤ 20	0.51	10000
	80	7.8	0.8	23	2.4	11	1.1	47	4.8					15000
	100	7.8	0.8	28	2.9	11	1.1	54	5.5					15000

OUTLINE DRAWING

FSS-17-XX-U-I

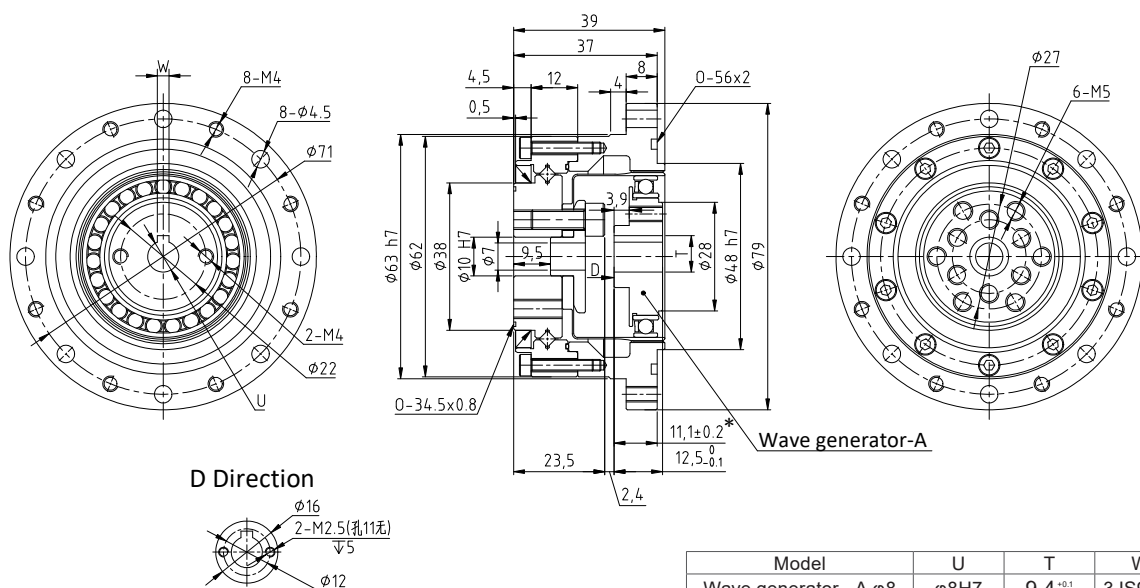


FSS-17-XX-U-I-LF

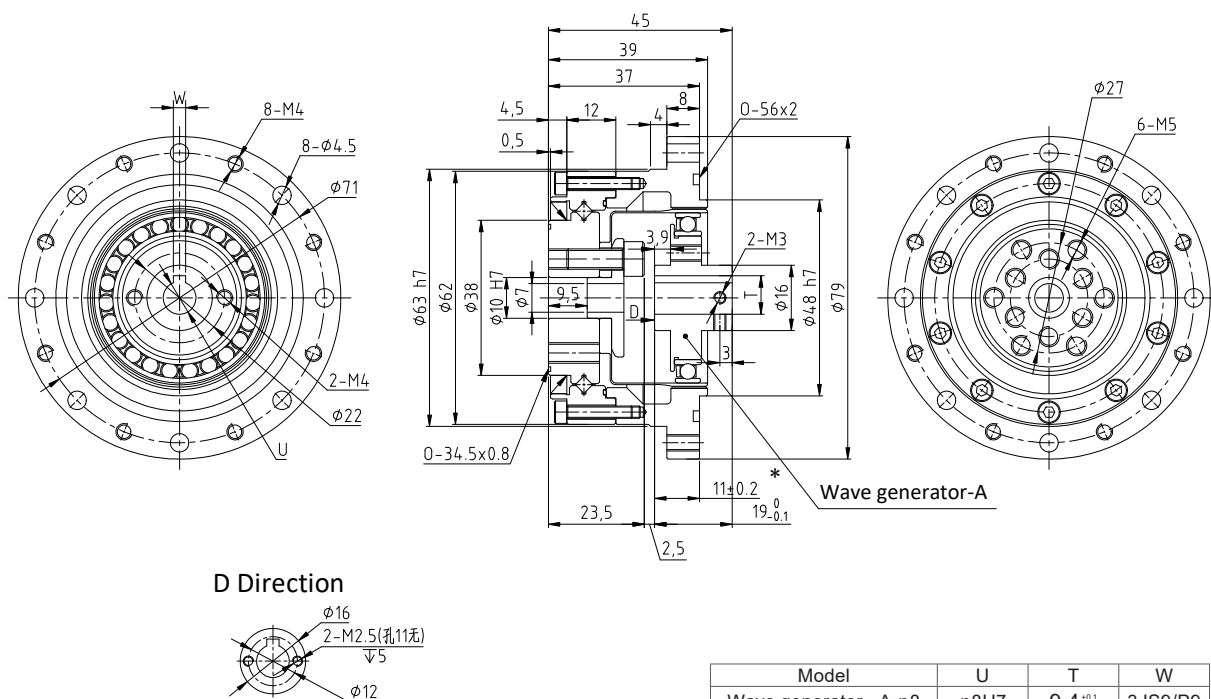


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤20	0.67	10000
	80	22	2.2	43	4.4	27	2.7	87	8.9					15000
	100	24	2.4	54	5.5	39	4	108	11					15000
	120	24	2.4	54	5.5	39	4	86	8.8					15000

OUTLINE DRAWING

FSS-20-XX-U-I

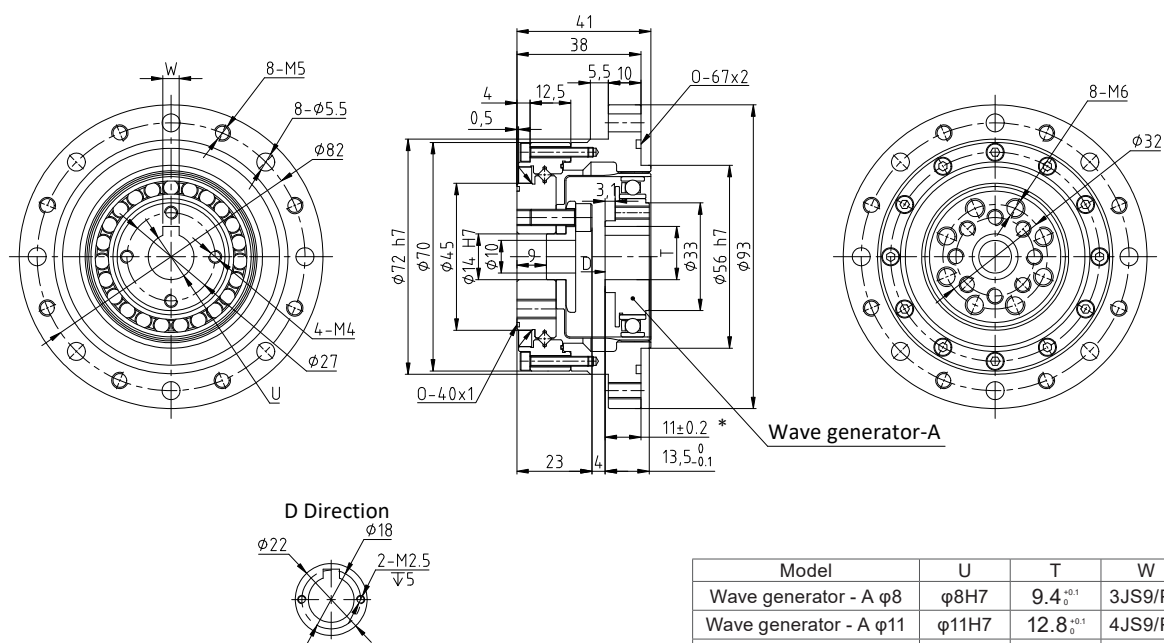


FSS-20-XX-U-I-LF

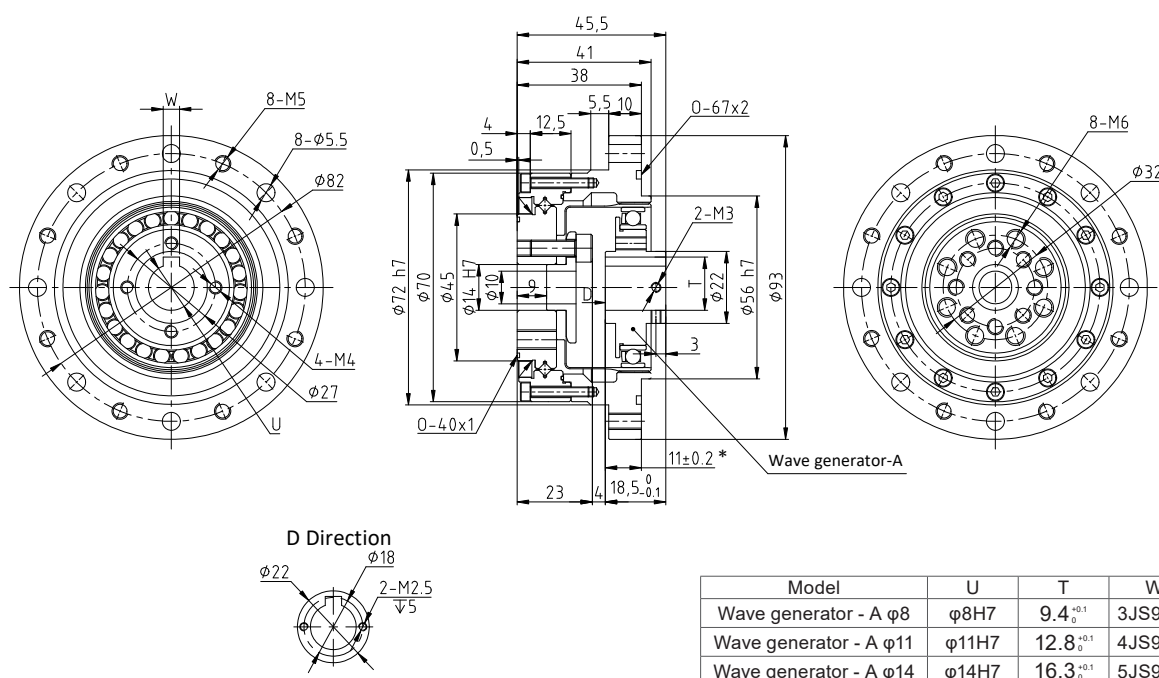


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤20	0.96	10000
	80	34	3.5	74	7.5	47	4.8	127	13					15000
	100	40	4.1	82	8.4	49	5	147	15					15000
	120	40	4.1	87	8.9	49	5	147	15					15000
	160	40	4.1	92	9.4	49	5	147	15					15000

OUTLINE DRAWING

FSS-25-XX-U-I

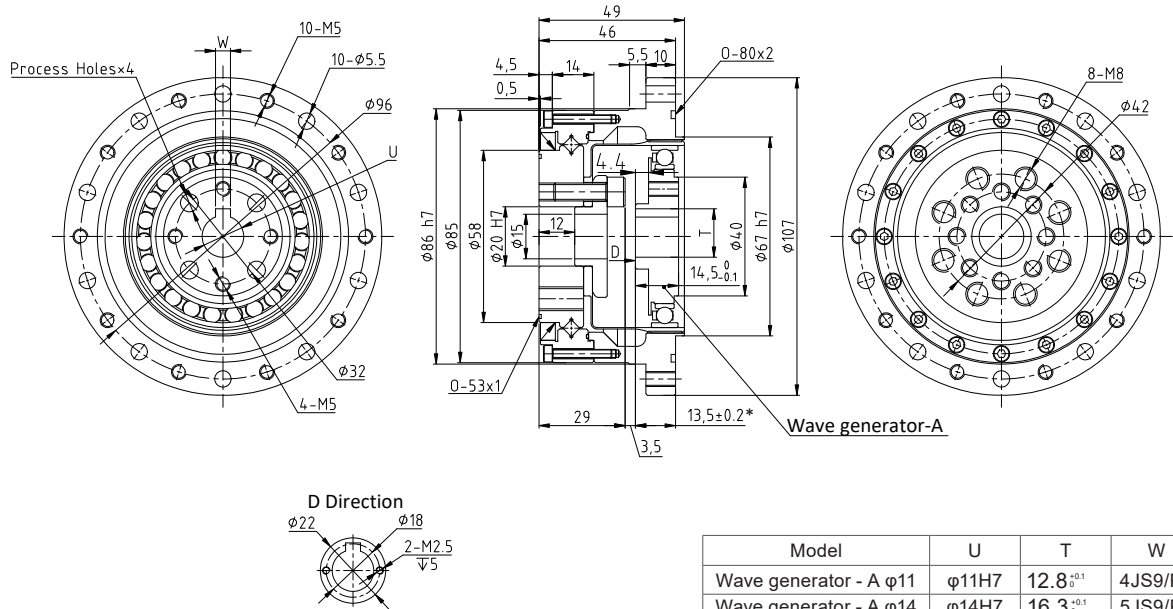


FSS-25-XX-U-I-LF

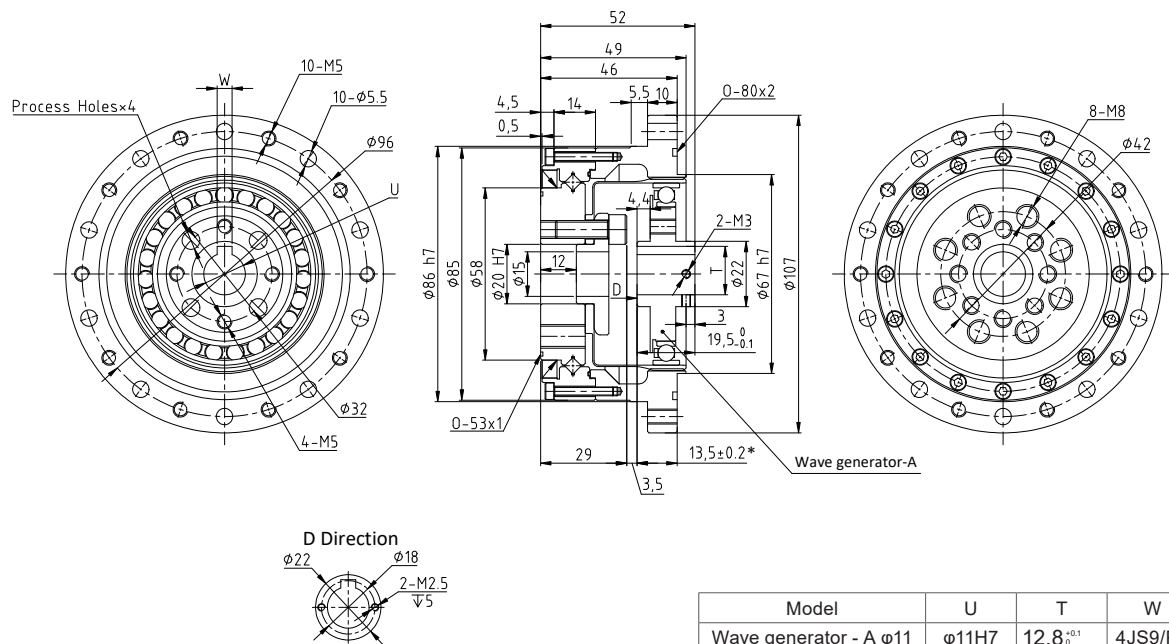


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
25	50	39	4	98	10	55	5.6	186	19	5600	3500	≤20	1.46	10000
	80	63	6.4	137	14	87	8.9	255	26					15000
	100	67	6.8	157	16	108	11	284	29					15000
	120	67	6.8	167	17	108	11	304	31					15000
	160	67	6.8	176	18	108	11	314	32					15000

OUTLINE DRAWING

FSS-32-XX-U-I

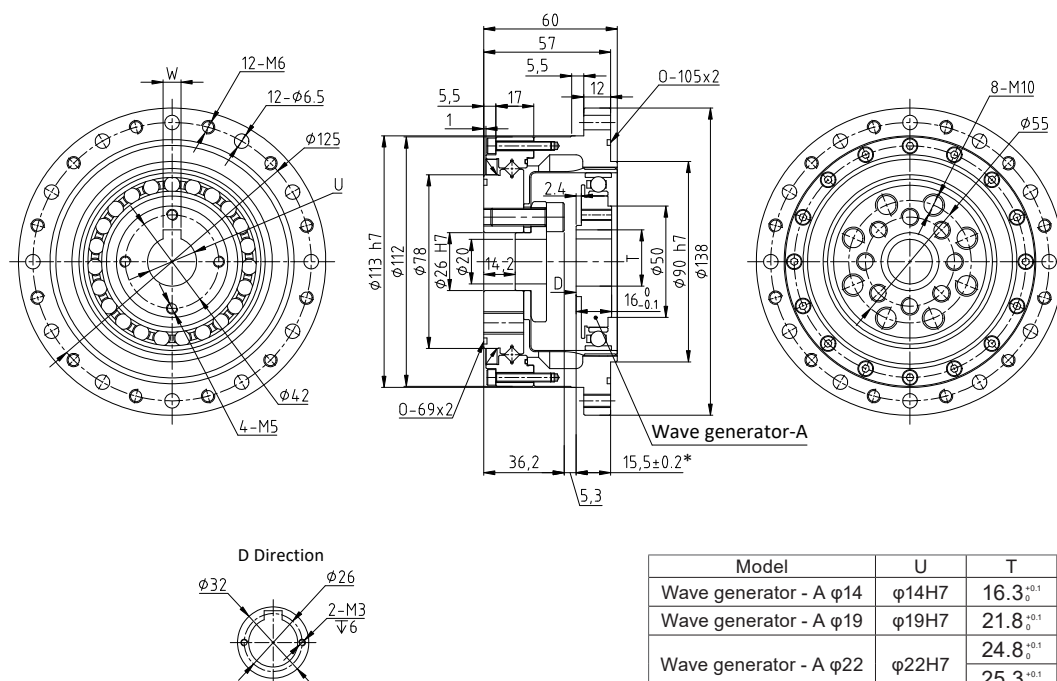

FSS-32-XX-U-I-LF

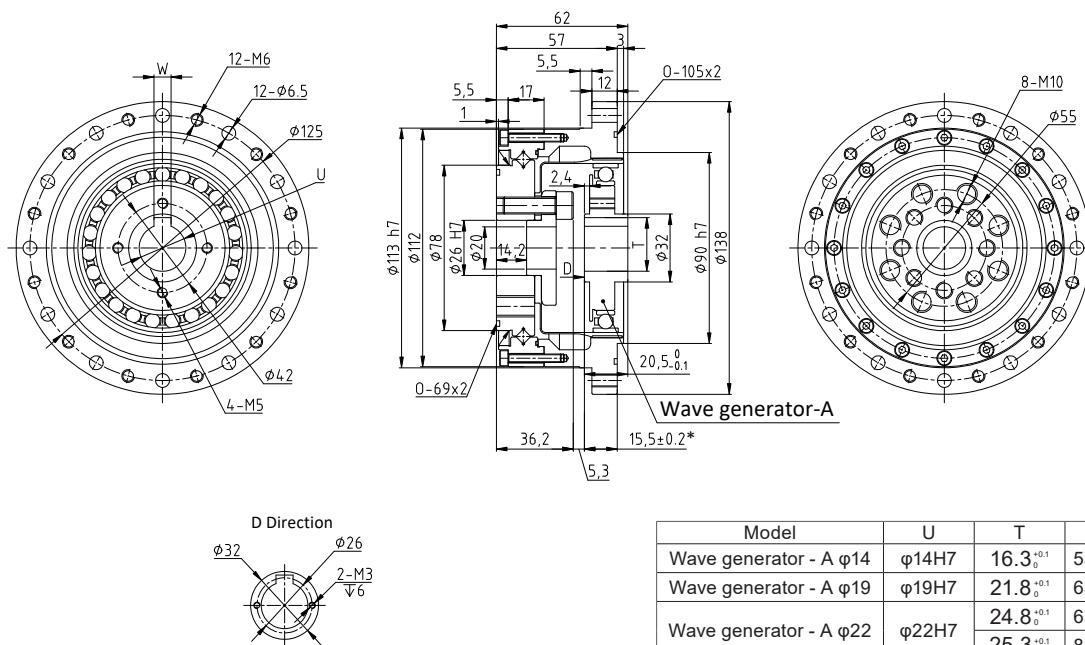


FSS-32-XX-U-I
FSS-32-XX-U-I-LF


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N-m	Kgf-m	N-m	Kgf-m	N-m	Kgf-m	N-m	Kgf-m					
32	50	76	7.8	216	22	108	11	382	39	4800	3500	≤ 20	3.11	10000
	80	118	12	304	31	167	17	568	58					15000
	100	137	14	333	34	216	22	647	66					15000
	120	137	14	353	36	216	22	686	70					15000
	160	137	14	372	38	216	22	686	70					15000

OUTLINE DRAWING

FSS-40-XX-U-I

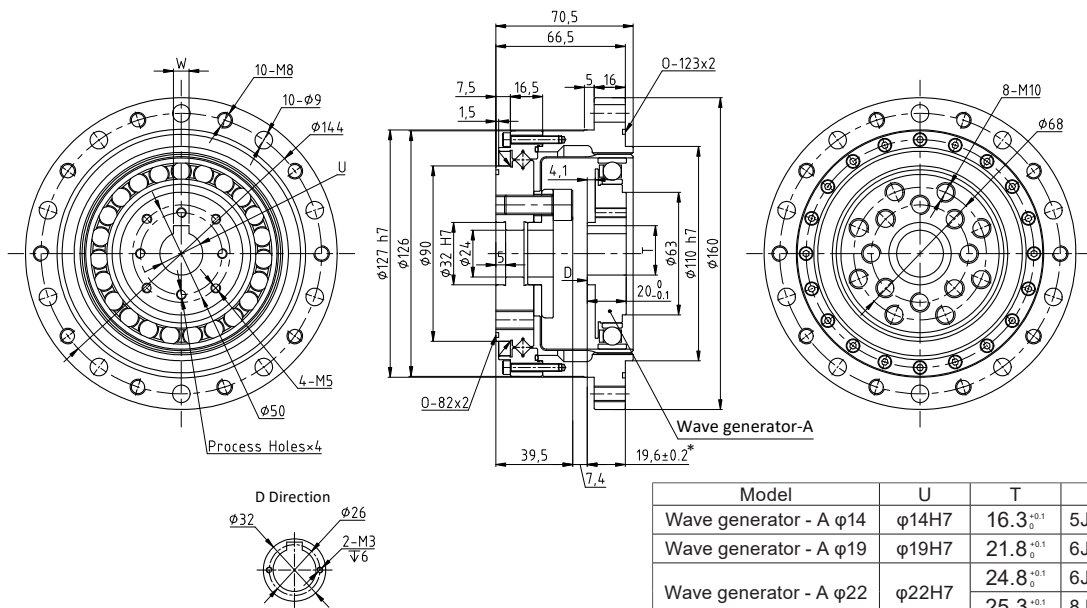


FSF-14-XX-U-I

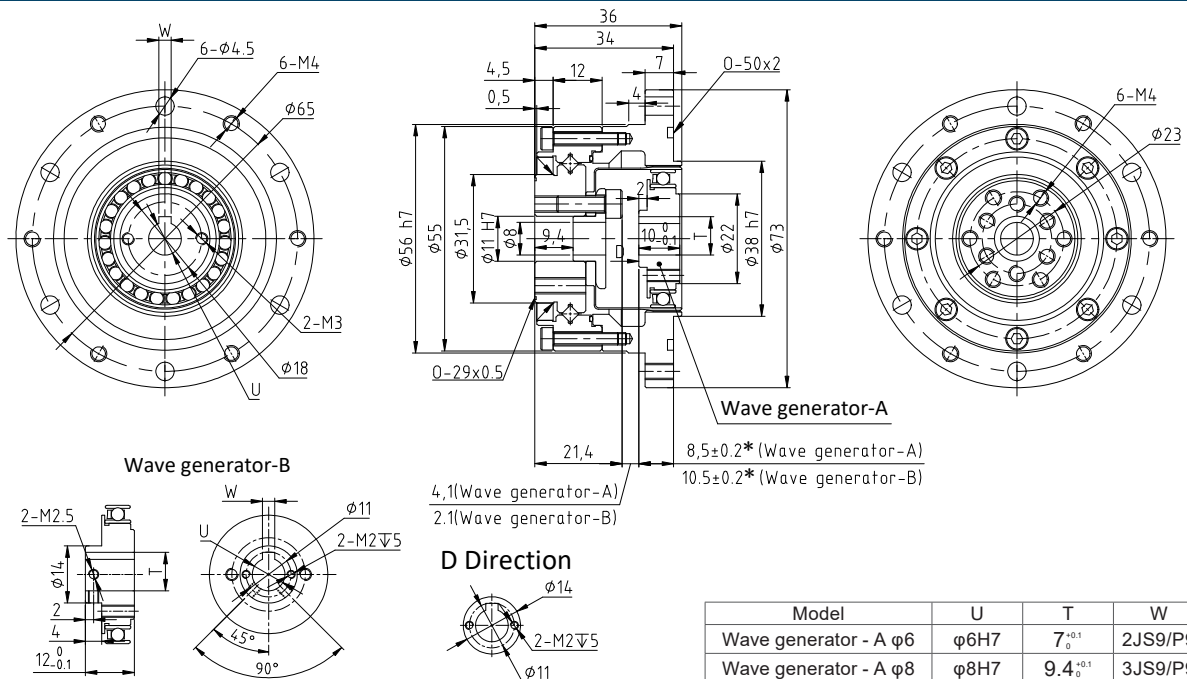


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
40	50	137	14	402	41	196	20	686	70	4000	3000	≤20	4.6	10000
	80	206	21	519	53	284	29	980	100					15000
	100	265	27	568	58	372	38	1080	110					15000
	120	294	30	617	63	451	46	1180	120					15000
	160	294	30	647	66	451	46	1180	120					15000
14	50	5.4	0.55	18	18	6.9	0.7	35	3.6	8500	3500	≤20	0.25	10000
	80	7.8	0.8	23	2.4	11	1.1	47	4.8					15000
	100	7.8	0.8	28	2.9	11	1.1	54	5.5					15000

OUTLINE DRAWING

FSF-17-XX-U-I

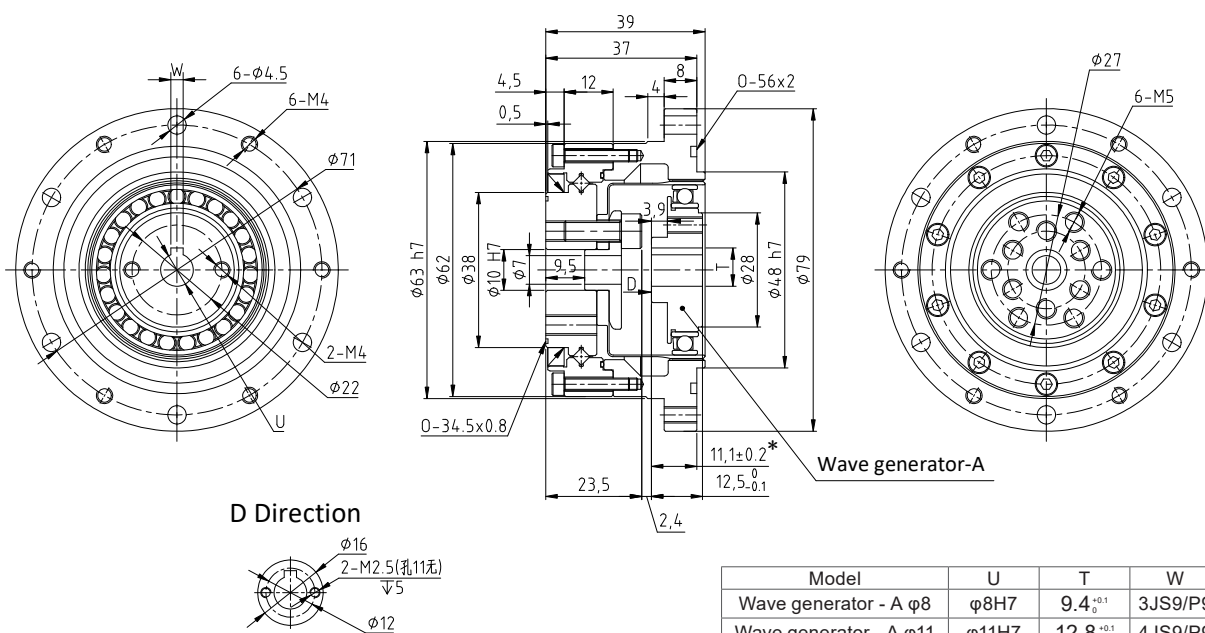


FSF-20-XX-U-I

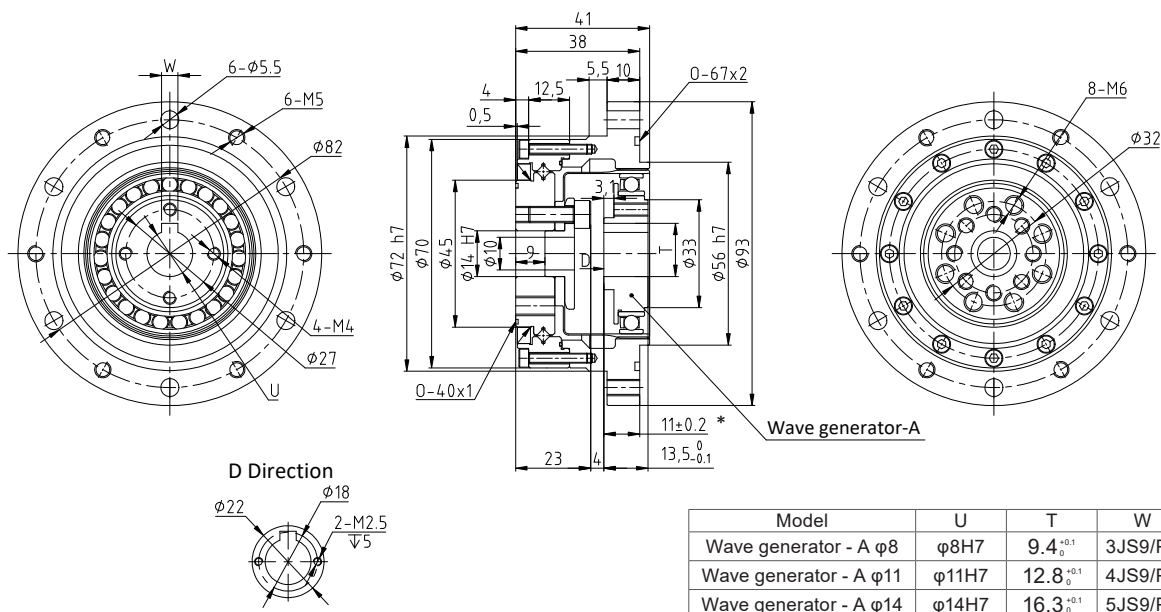


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤20	0.67	10000
	80	22	2.2	43	4.4	27	2.7	87	8.9					15000
	100	24	2.4	54	5.5	39	4	108	11					15000
	120	24	2.4	54	5.5	39	4	86	8.8					15000
20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤20	0.96	10000
	80	34	3.5	74	7.5	47	4.8	127	13					15000
	100	40	4.1	82	8.4	49	5	147	15					15000
	120	40	4.1	87	8.9	49	5	147	15					15000
	160	40	4.1	92	9.4	49	5	147	15					15000

OUTLINE DRAWING

FSN-5-XX-U-I

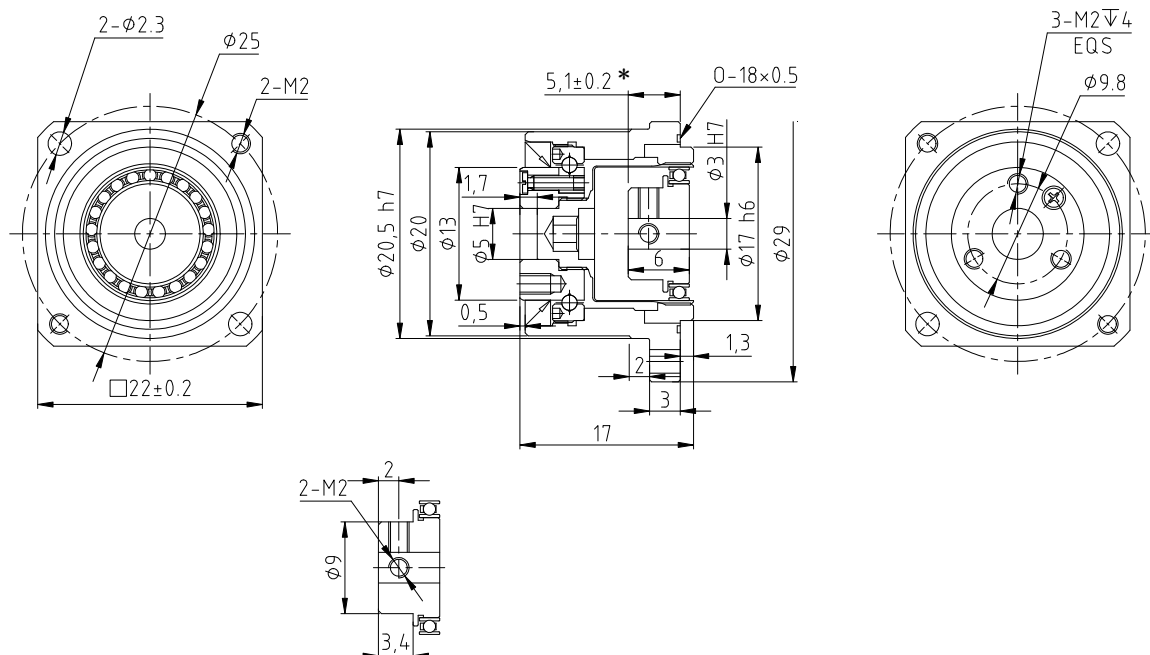

FSN-8-XX-U-I

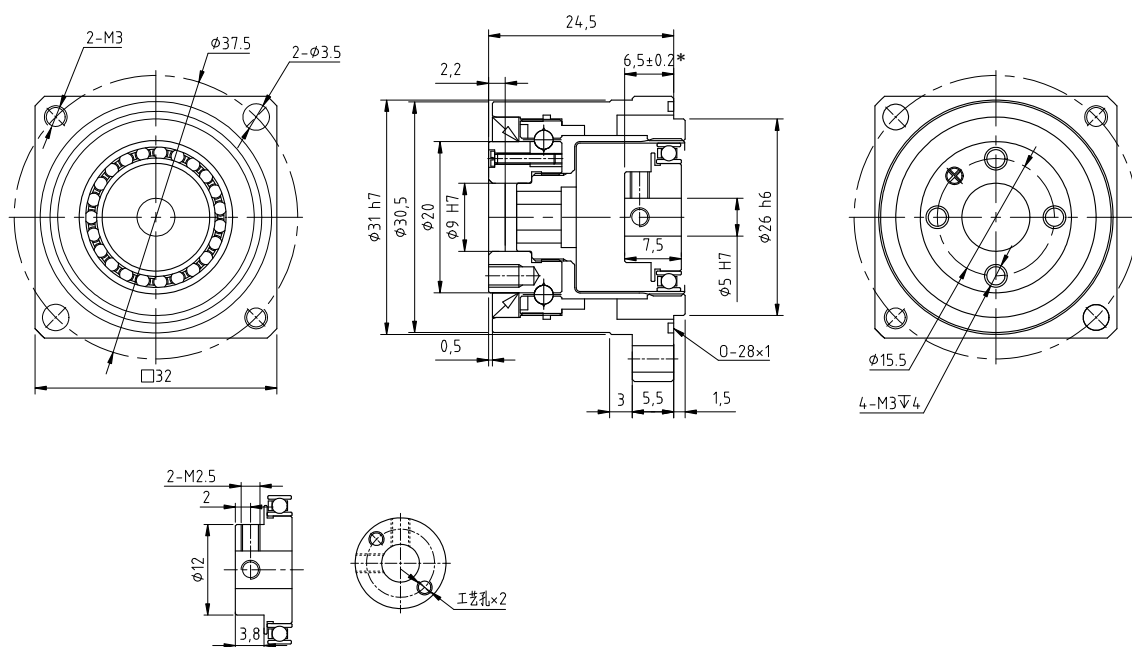


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
5	50	0.4	0.04	0.9	0.09	0.53	0.05	1.8	0.18	10000	6500	≤60	0.025	10000
	100	0.6	0.06	1.4	0.14	0.94	0.1	2.7	0.28					10000
8	50	1.8	0.18	3.3	0.34	2.3	0.23	6.6	0.67	8500	3500	≤30	0.08	10000
	100	2.4	0.24	4.8	0.49	3.3	0.34	9	0.92					10000


FSN-5-XX-U-I
FSN-8-XX-U-I

OUTLINE DRAWING

FSN-17-XX-U-I

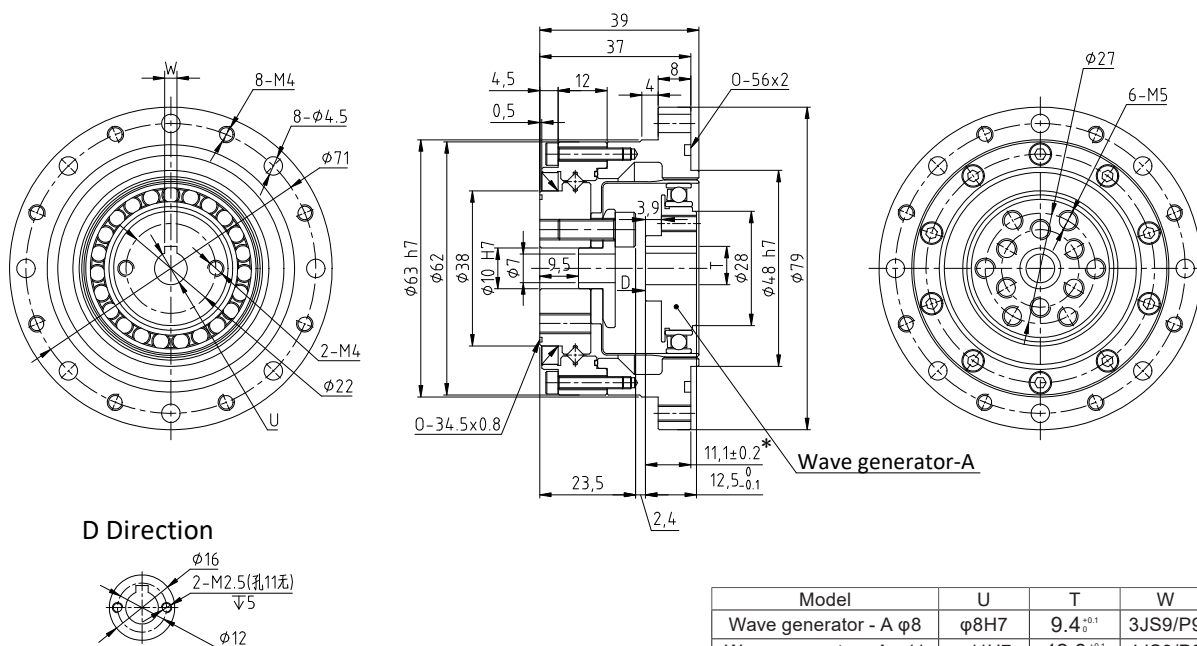

FSN-20-XX-U-I

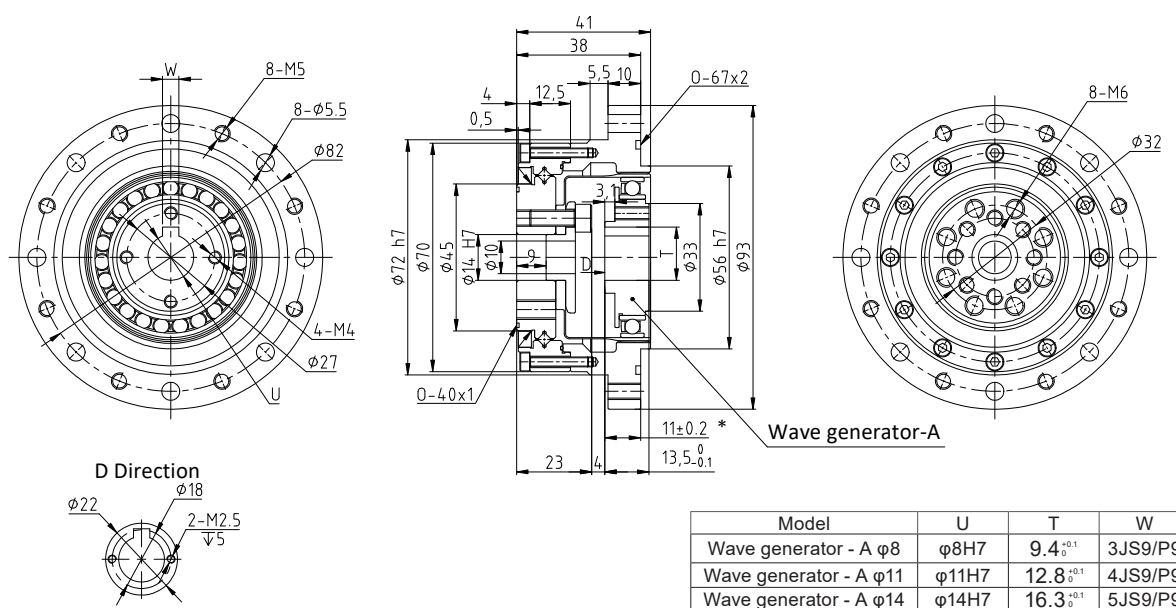


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤20	0.52	10000
	80	22	2.2	43	4.4	27	2.7	87	8.9					15000
	100	24	2.4	54	5.5	39	4	108	11					15000
	120	24	2.4	54	5.5	39	4	86	8.8					15000
20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤20	0.73	10000
	80	34	3.5	74	7.5	47	4.8	127	13					15000
	100	40	4.1	82	8.4	49	5	147	15					15000
	120	40	4.1	87	8.9	49	5	147	15					15000
	160	40	4.1	92	9.4	49	5	147	15					15000


FSN-17-XX-U-I
FSN-20-XX-U-I

OUTLINE DRAWING

FSN-25-XX-U-I

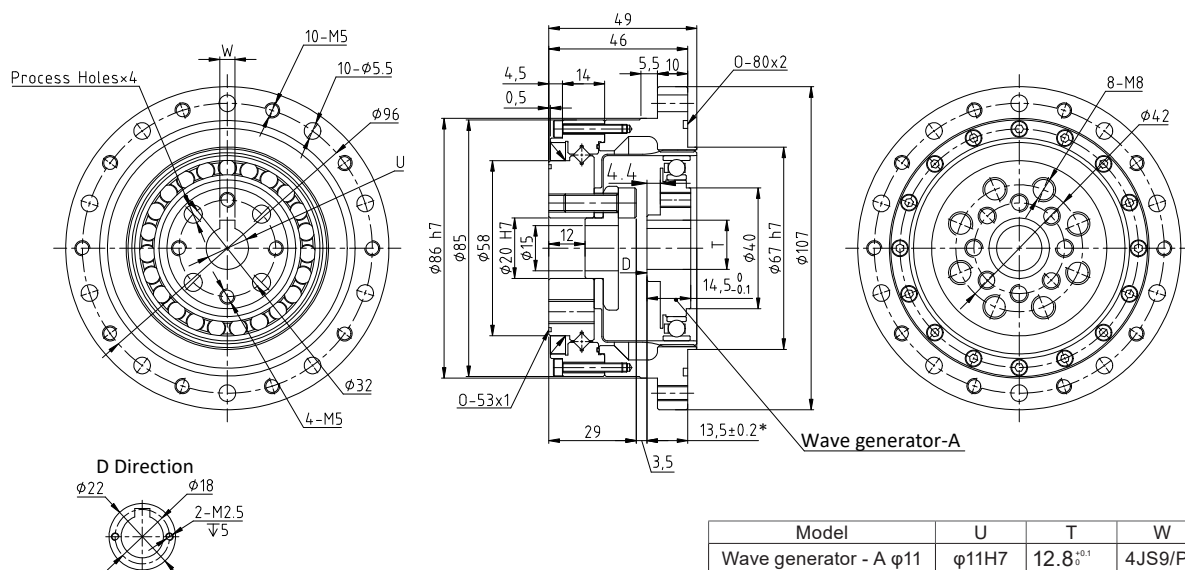


FSN-32-XX-U-I

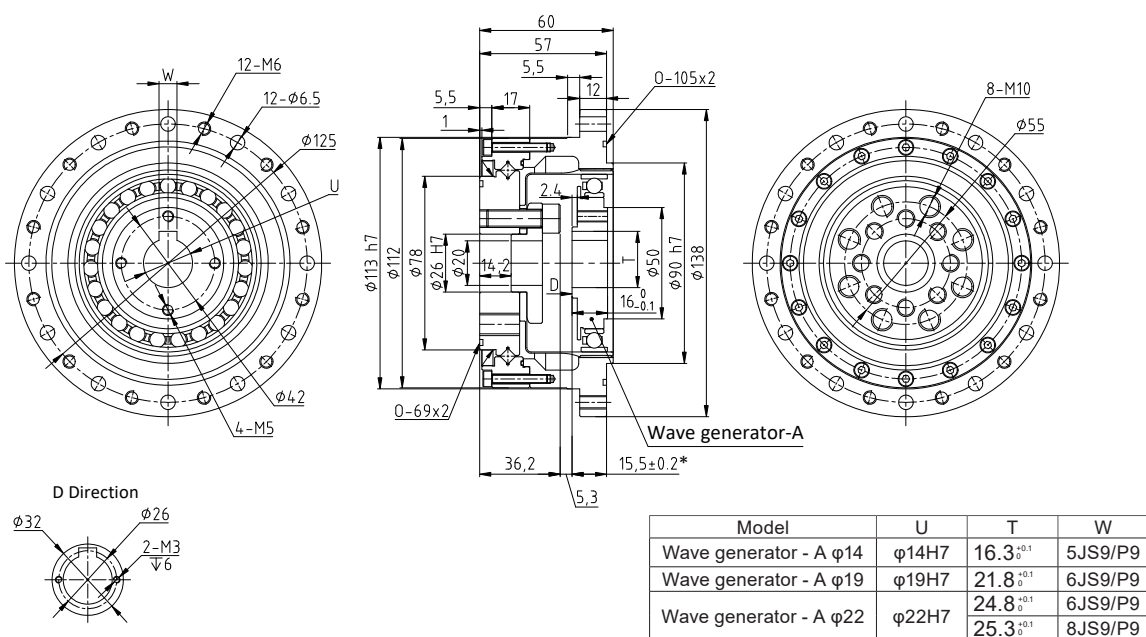

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
25	50	39	4	98	10	55	5.6	186	19	5600	3500	≤20	1.14	10000
	80	63	6.4	137	14	87	8.9	255	26					15000
	100	67	6.8	157	16	108	11	284	29					15000
	120	67	6.8	167	17	108	11	304	31					15000
	160	67	6.8	176	18	108	11	314	32					15000
32	50	76	7.8	216	22	108	11	382	39	4800	3500	≤20	2.47	10000
	80	118	12	304	31	167	17	568	58					15000
	100	137	14	333	34	216	22	647	66					15000
	120	137	14	353	36	216	22	686	70					15000
	160	137	14	372	38	216	22	686	70					15000

FSN-40-XX-U-I




Model	U	T	W
Wave generator - A/B $\phi 6$	$\phi 6H7$	$7_0^{+0.1}$	2JS9/P9
Wave generator - A/B $\phi 8$	$\phi 8H7$	$9.4_0^{+0.1}$	3JS9/P9


Laifual 49

OUTLINE DRAWING

FSG-17-XX-C-I

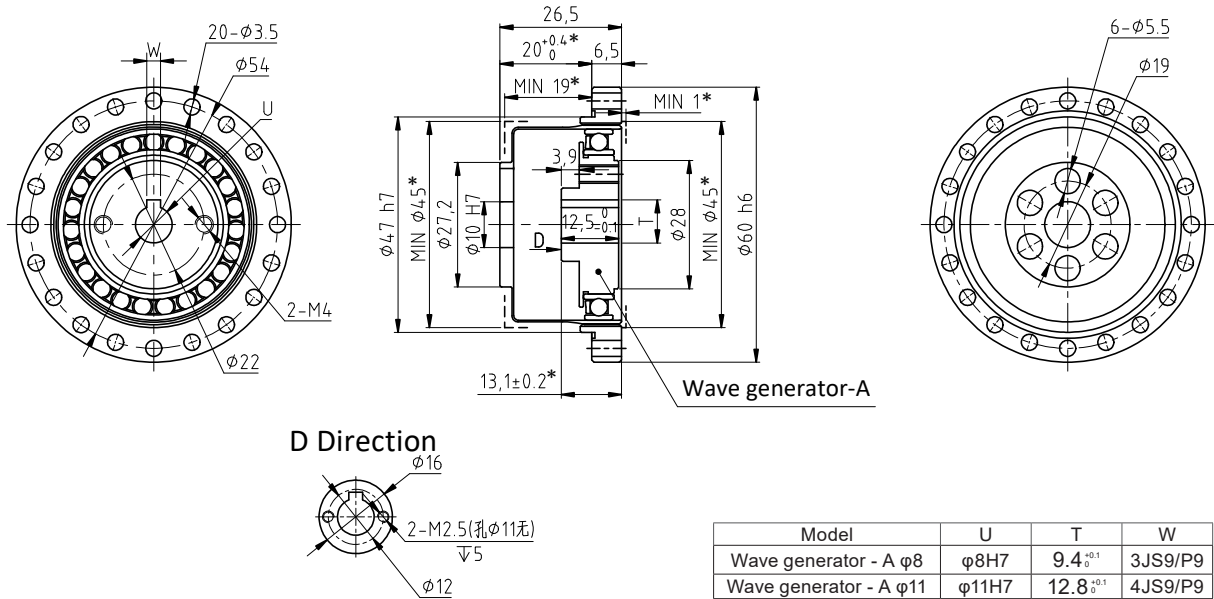


FSG-20-XX-C-I

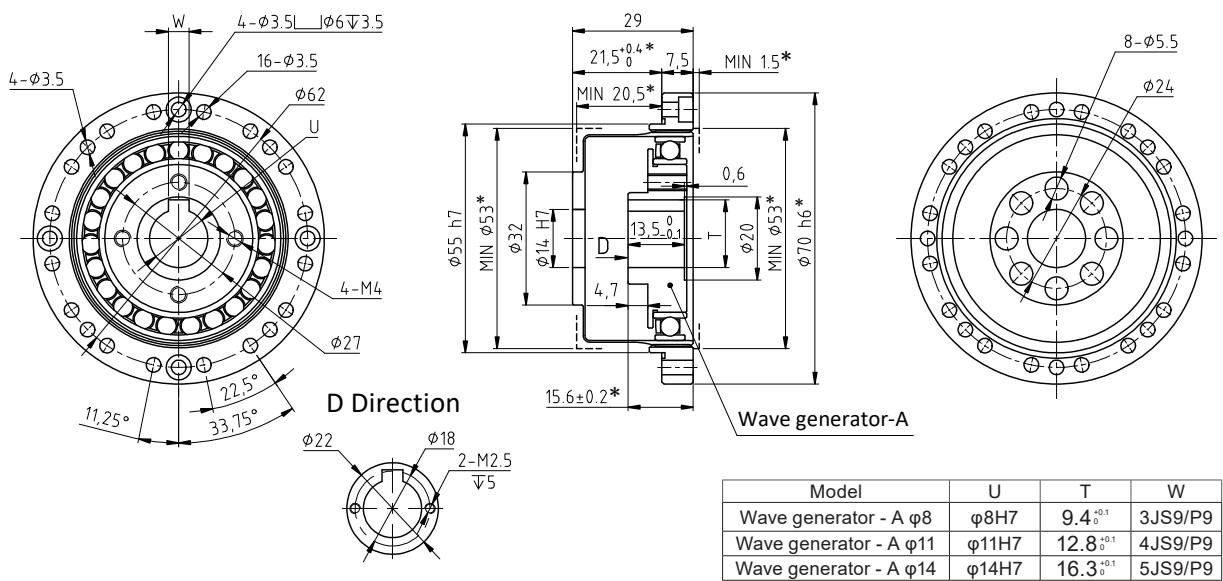


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤ 20	0.15	10000
	80	29	2.9	56	5.7	35	3.6	113	12					15000
	100	31	3.2	70	7.2	51	5.2	143	15					15000
	120	31	3.2	70	7.2	51	5.2	112	11					15000
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤ 20	0.28	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000

OUTLINE DRAWING

FSG-25-XX-C-I

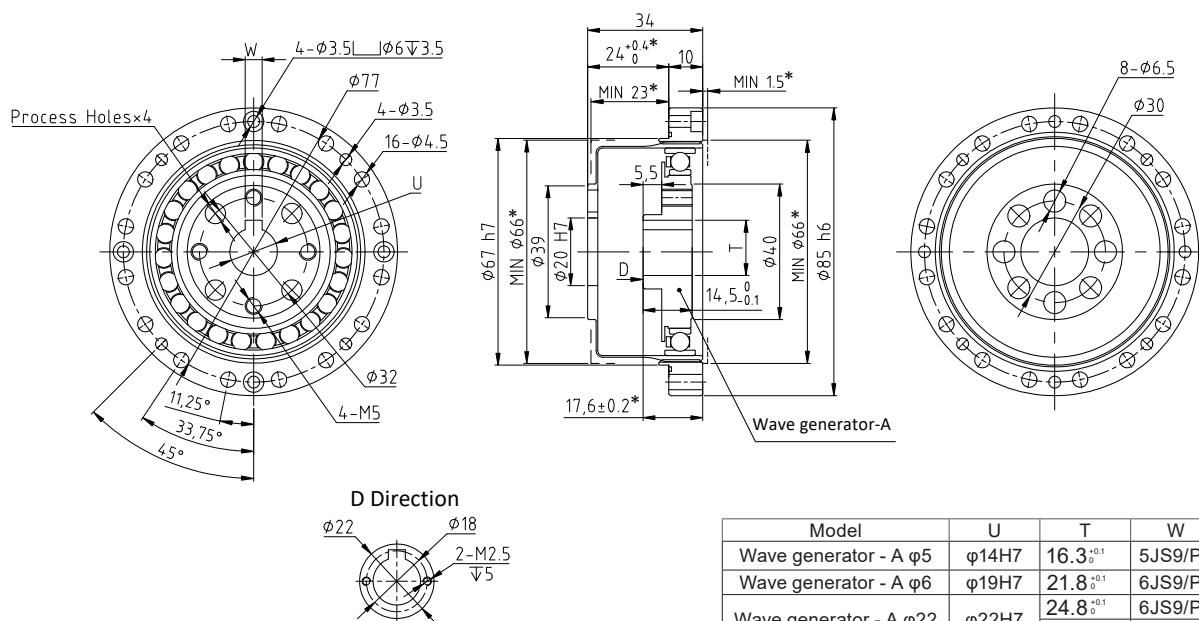


FSG-32-XX-C-I

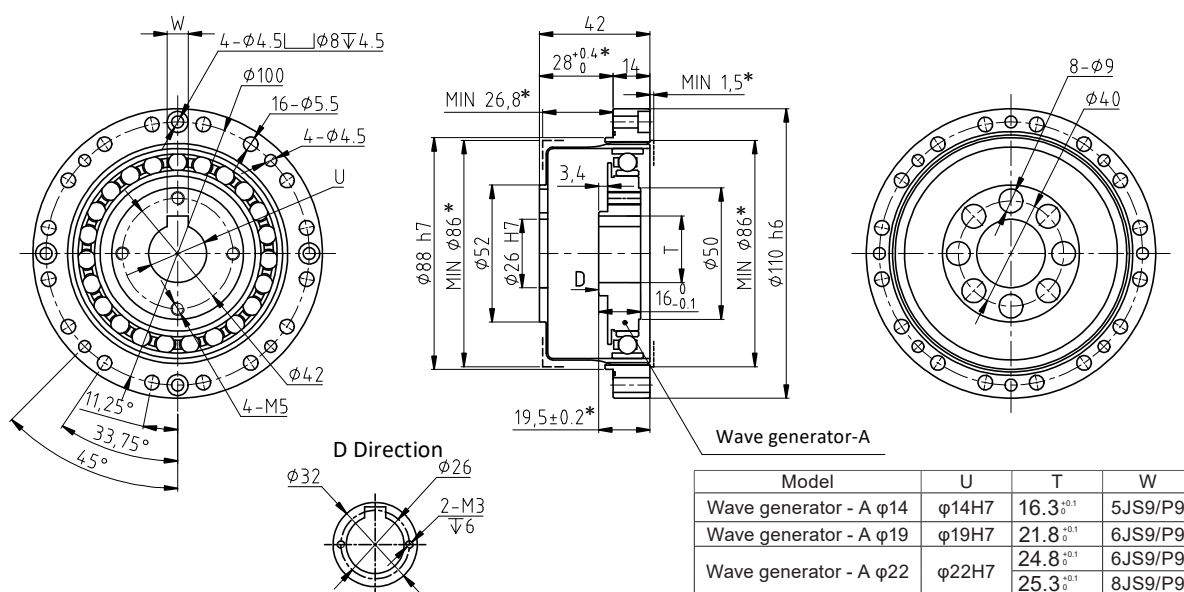


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤20	0.42	10000
	80	82	8.4	178	18	113	12	332	34					15000
	100	87	8.9	204	21	140	14	369	38					15000
	120	87	8.9	217	22	140	14	395	40					15000
	160	87	8.9	229	23	140	14	408	42					15000
32	50	99	10	281	29	140	14	497	51	4800	3500	≤20	0.89	10000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	179	18	484	49	281	29	892	91					15000

OUTLINE DRAWING

FSG-40-XX-C-I

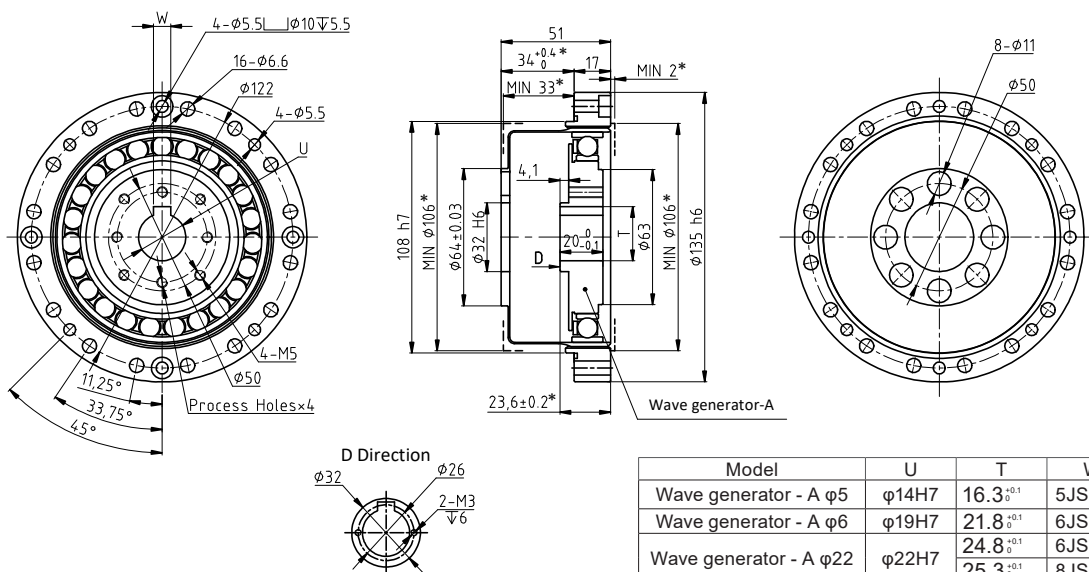


FSG-14-XX-U-I

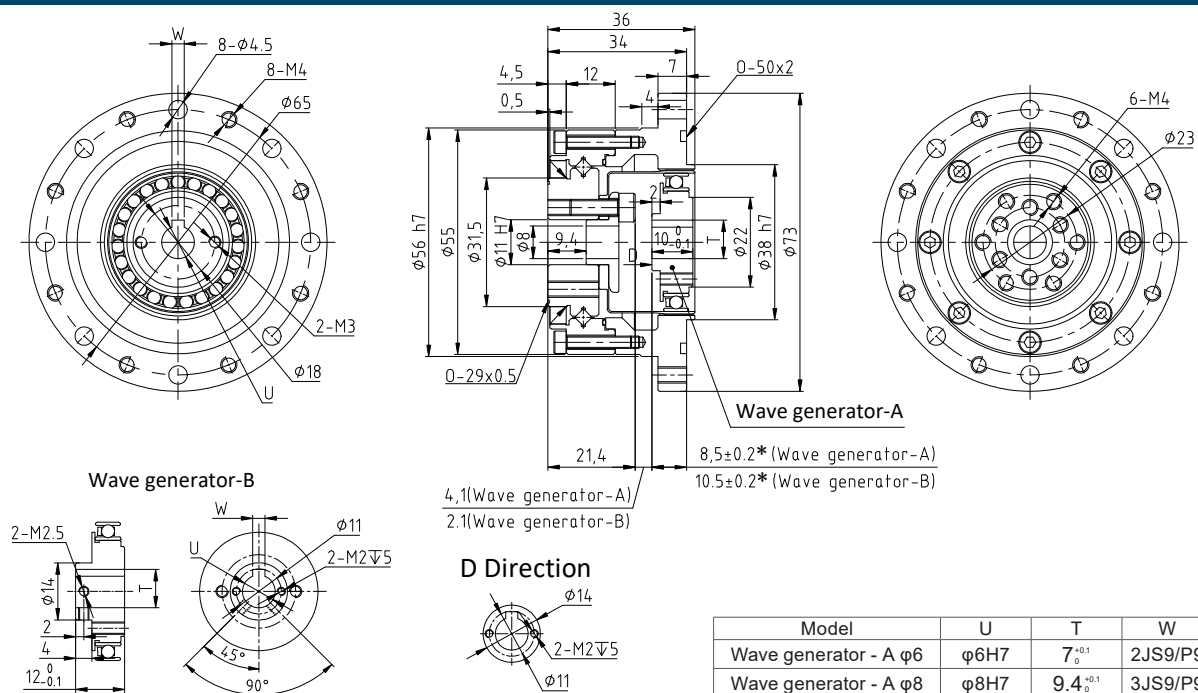


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
40	50	178	18	523	53	255	26	892	91	4000	3000	≤ 20	1.7	10000
	80	268	27	675	69	369	38	1270	130					15000
	100	345	35	738	75	484	49	1400	143					15000
	120	382	39	802	82	586	60	1530	156					15000
	160	382	39	841	86	586	60	1530	156					15000
14	50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤ 20	0.51	10000
	80	10	1	30	3.1	14	1.4	58	5.9					15000
	100	10	1	36	3.7	14	1.4	58	5.9					15000
	120	10	1	36	3.7	14	1.4	58	5.9					15000

OUTLINE DRAWING

FSG-17-XX-U-I

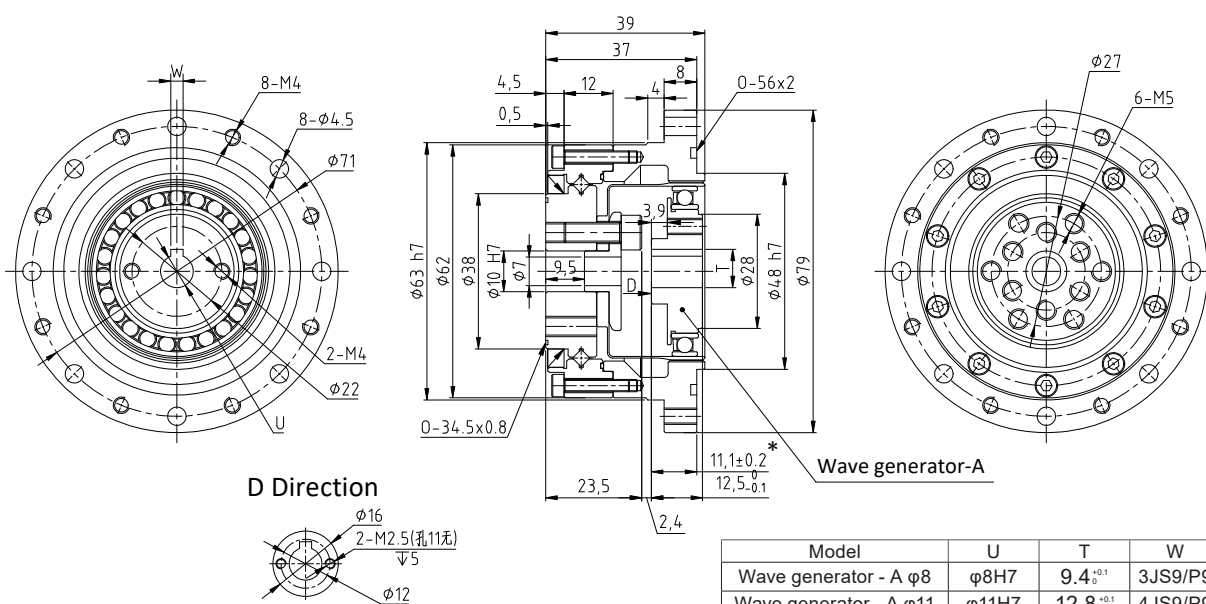

FSG-20-XX-U-I

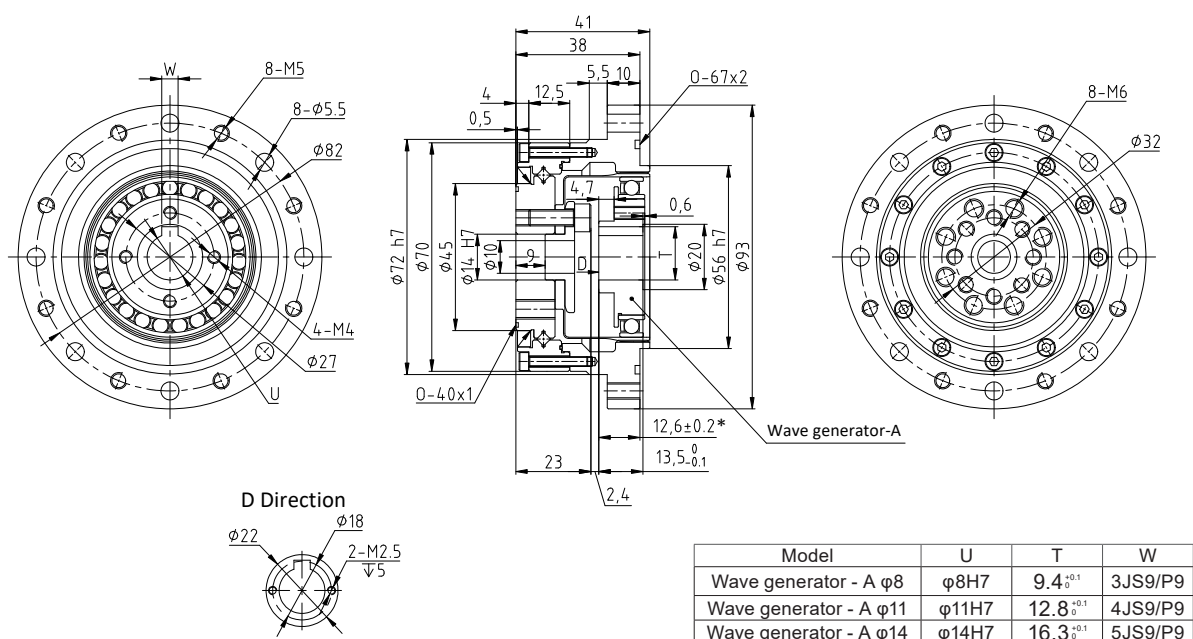


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤20	0.67	10000
	80	29	2.9	56	5.7	35	3.6	109	11					15000
	100	31	3.2	70	7.2	51	5.2	109	11					15000
	120	31	3.2	70	7.2	51	5.2	109	11					15000
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤20	0.96	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000


FSG-17-XX-U-I
FSG-20-XX-U-I

OUTLINE DRAWING

FSG-25-XX-U-I

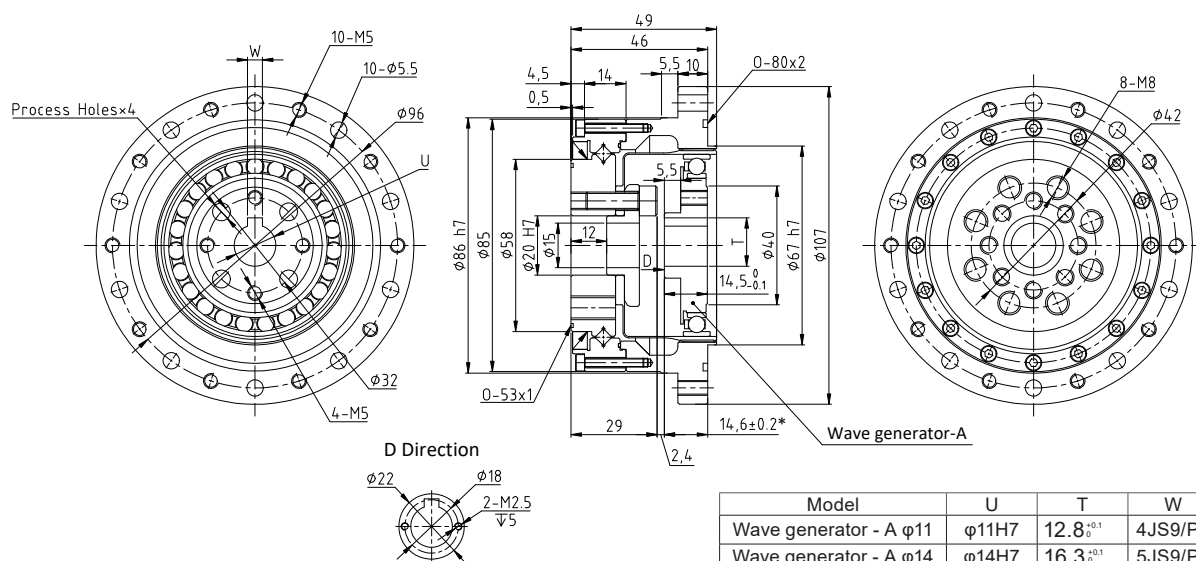


FSG-32-XX-U-I

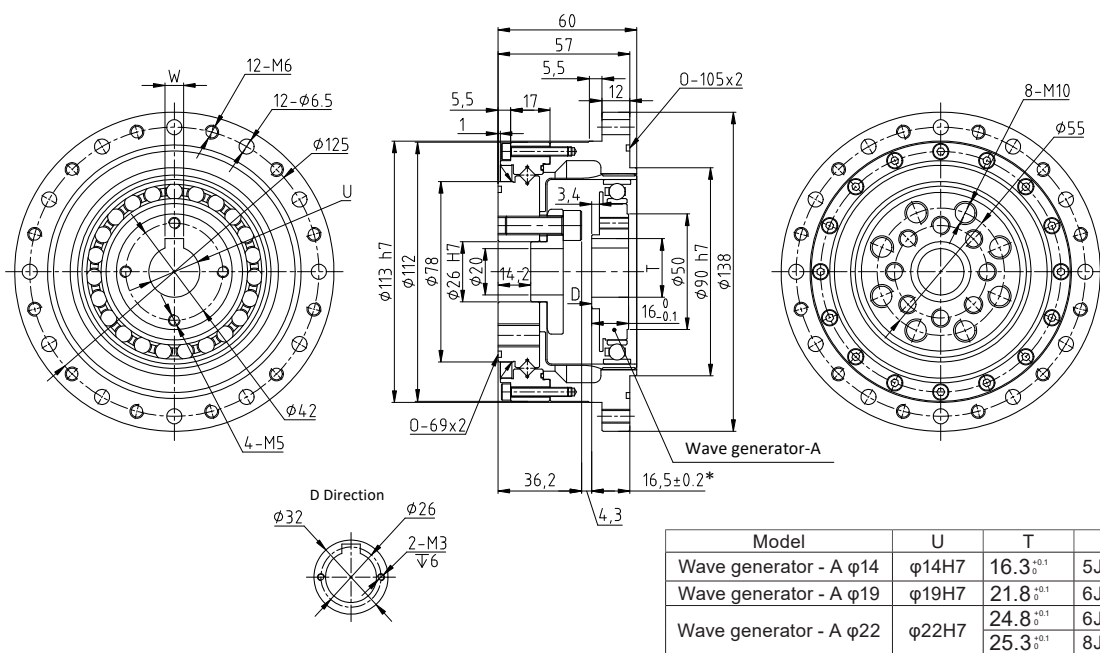


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤20	1.46	10000
	80	82	8.4	178	18	113	12	332	34					15000
	100	87	8.9	204	21	140	14	369	38					15000
	120	87	8.9	217	22	140	14	395	40					15000
	160	87	8.9	229	23	140	14	408	42					15000
32	50	99	10	281	29	140	14	497	51	4800	3500	≤20	3.11	15000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	179	18	484	49	281	29	892	91					15000

OUTLINE DRAWING

FSG-40-XX-U-I

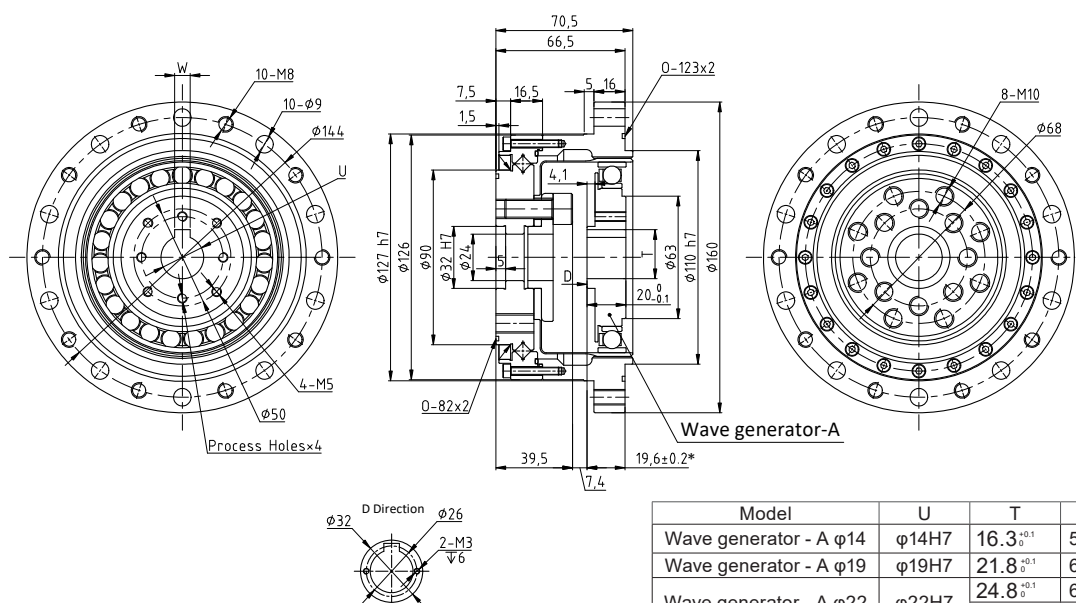


FSG-14-XX-U-II

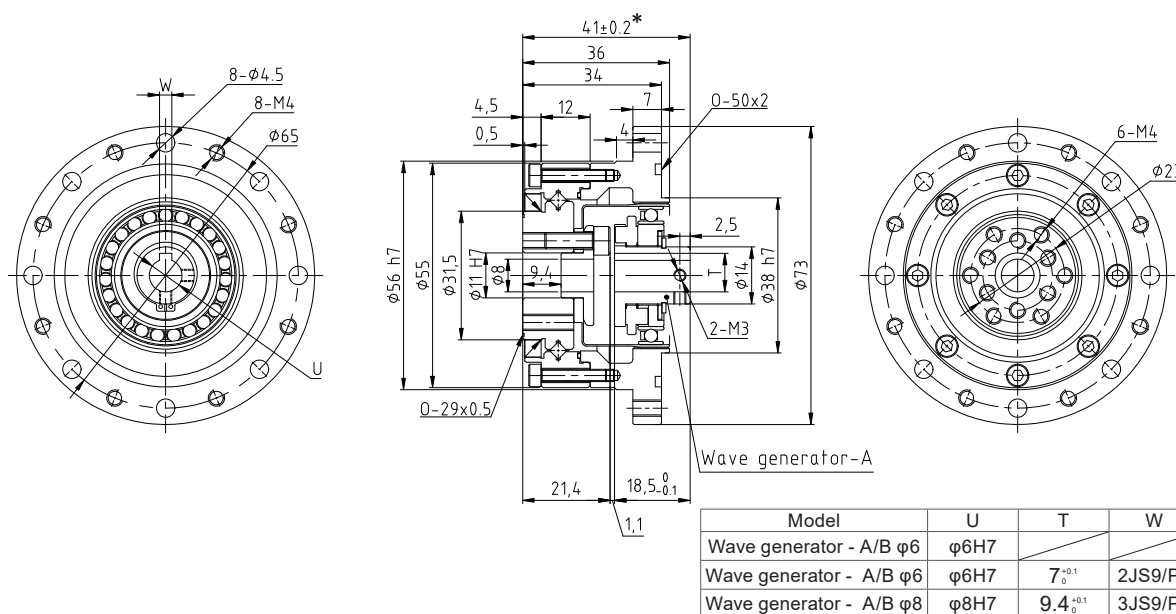


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
40	50	178	18	523	53	255	26	892	91	4000	3000	≤20	4.60	10000
	80	268	27	675	69	369	38	1270	130					15000
	100	345	35	738	75	484	49	1400	143					15000
	120	382	39	802	82	586	60	1510	154					15000
	160	382	39	841	86	586	60	1530	156					15000
14	50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤20	0.51	10000
	80	10	1	30	3.1	14	1.4	58	5.9					15000
	100	10	1	36	3.7	14	1.4	58	5.9					15000
	120	10	1	36	3.7	14	1.4	58	5.9					15000

OUTLINE DRAWING

FSG-17-XX-U-II

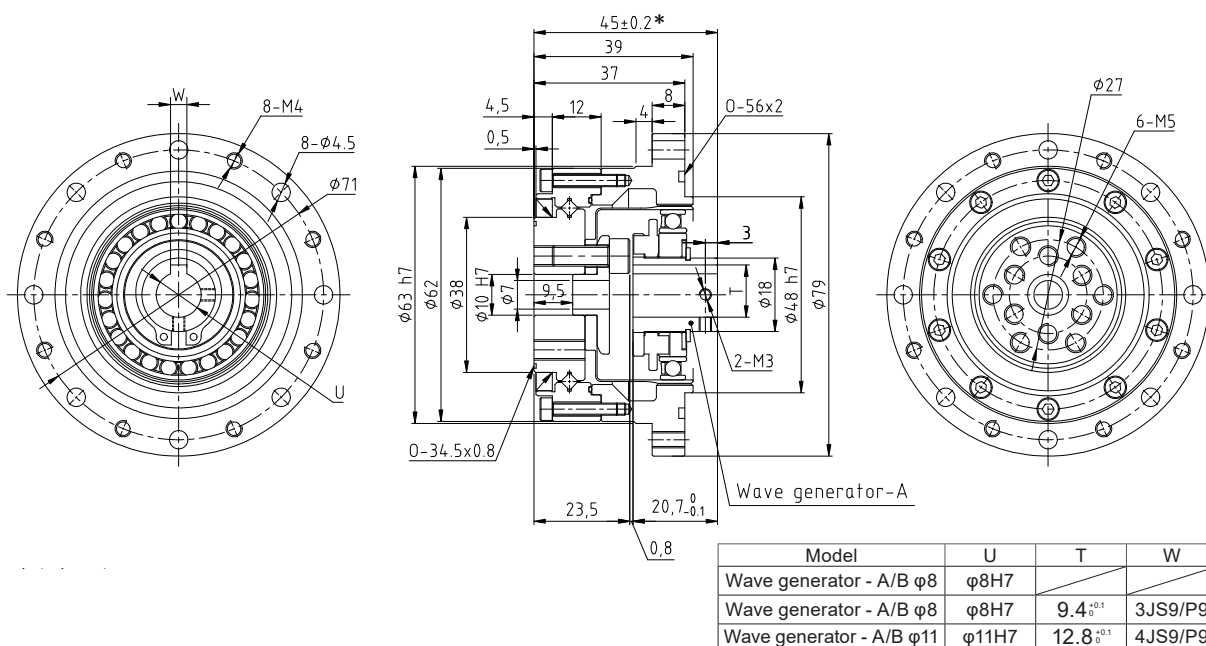


FSG-20-XX-U-II

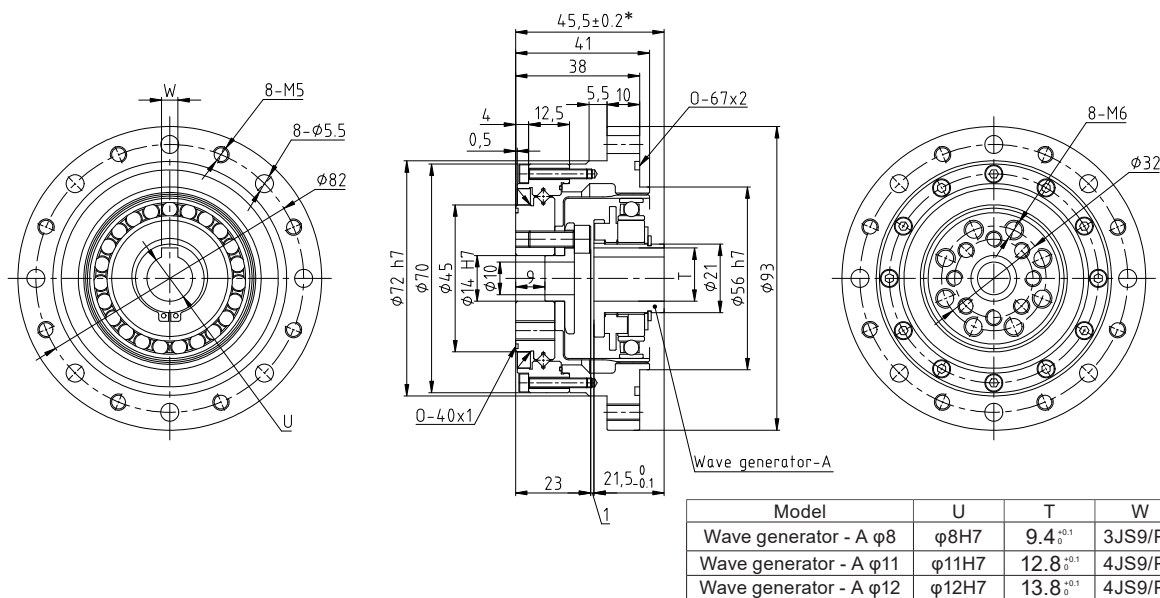


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤ 20	0.67	10000
	80	29	2.9	56	5.7	35	3.6	109	11					15000
	100	31	3.2	70	7.2	51	5.2	109	11					15000
	120	31	3.2	70	7.2	51	5.2	109	11					15000
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤ 20	0.96	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000

OUTLINE DRAWING

FSG-25-XX-U-II

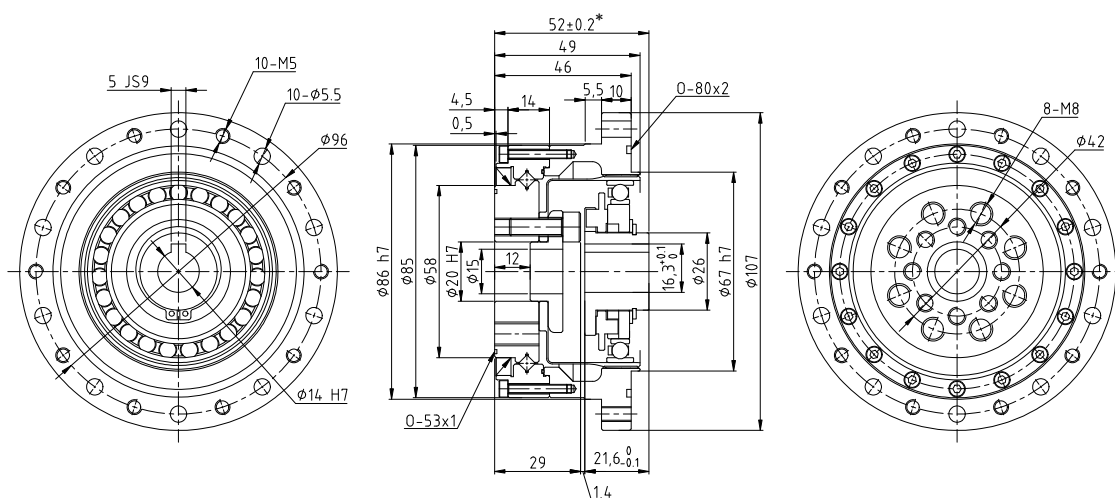

FSG-32-XX-U-II

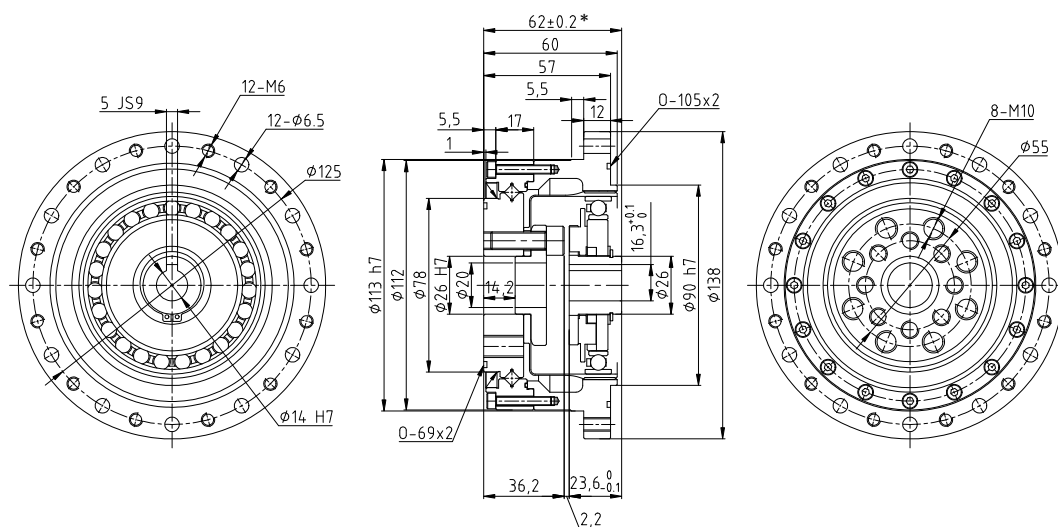

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤ 20	1.46	10000
	80	82	8.4	178	18	113	12	332	34					15000
	100	87	8.9	204	21	140	14	369	38					15000
	120	87	8.9	217	22	140	14	395	40					15000
	160	87	8.9	229	23	140	14	408	42					15000
32	50	99	10	281	29	140	14	497	51	4800	3500	≤ 20	3.11	15000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	179	18	484	49	281	29	892	91					15000

FSG-25-XX-U-II
FSG-32-XX-U-II

INTRODUCTION OF FSD



FSD-I

FSD


This miniaturized product was developed according to the marketing demand.

Compare with FSS series that with the same torque capacity, FSD series is more compact and thin-walled. smaller size.

■ Application

- Industrial Robot
- Service Robots
- Printed Circuit Manufacturing
- Metal Machine Tools Equipment
- Wood Light Metal, Plastic Machine Tools

Unit type structure of FSD

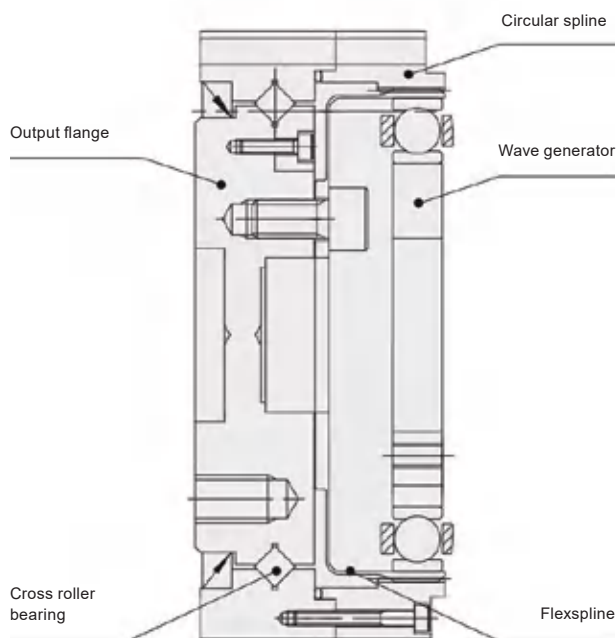

FSD-I

TECHNICAL DATA OF FSD

Rating table of FSD

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed (Grease lubricant)	Permissible ave. input rotational speed (Grease lubricant)	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
14	50	3.7	0.38	12	1.2	4.8	0.49	24	2.4	8500	3500	≤20	0.37	9000
	80	5.4	0.55	16	1.6	7.7	0.79	35	3.6					10000
	100	5.4	0.55	19	1.9	7.7	0.79	35	3.6					10000
17	50	11	1.1	23	2.3	18	1.8	48	4.9	7300	3500	≤20	0.46	9000
	80	15	1.5	29	3	19	1.9	61	6.2					10000
	100	16	1.6	37	3.8	27	2.8	71	7.2					10000
20	50	17	1.7	39	4	24	2.4	69	7	6500	3500	≤20	0.65	9000
	80	24	2.4	51	5.2	33	3.4	89	9.1					10000
	100	28	2.9	57	5.8	34	3.5	95	9.7					10000
25	50	27	2.8	69	7	38	3.9	127	13	5600	3500	≤20	1.2	9000
	80	44	4.5	96	9.8	60	6.1	179	18					10000
	100	47	4.8	110	11	75	7.6	184	19					10000
32	50	53	5.4	151	15	75	7.6	268	27	4800	3500	≤20	2.4	9000
	80	83	8.5	213	22	117	12	398	41					10000
	100	96	9.8	233	24	151	15	420	43					10000

Transmission accuracy

unit: arc min

Type Reduction ratio	14	17	20	25	32
50	1.5	1.5	1.5	1	1
above 50	1.5	1.5	1.5	1	1

Hysteresis loss

unit: arc min


Type Reduction ratio	14	17	20	25	32
50	2.5	2	2	2	2
above 50	1	1	1	1	1

Torsional stiffness

Project		Type Unit	14	17	20	25	32
T1		Nm	2	3.9	7	14	29
T2		Nm	6.9	12	25	48	108
Reduction ratio 50	K1	× 10 ⁴ Nm/rad	0.29	0.67	1.1	2	4.7
	K2	× 10 ⁴ Nm/rad	0.37	0.88	1.3	2.7	6.1
	K3	× 10 ⁴ Nm/rad	0.47	1.2	2	3.7	8.4
Reduction ratio above 50	K1	× 10 ⁴ Nm/rad	0.4	0.84	1.3	2.7	6.1
	K2	× 10 ⁴ Nm/rad	0.44	0.94	1.7	3.7	7.8
	K3	× 10 ⁴ Nm/rad	0.61	1.3	2.5	4.7	11


OUTLINE DRAWING

FSD-14-XX-U-I

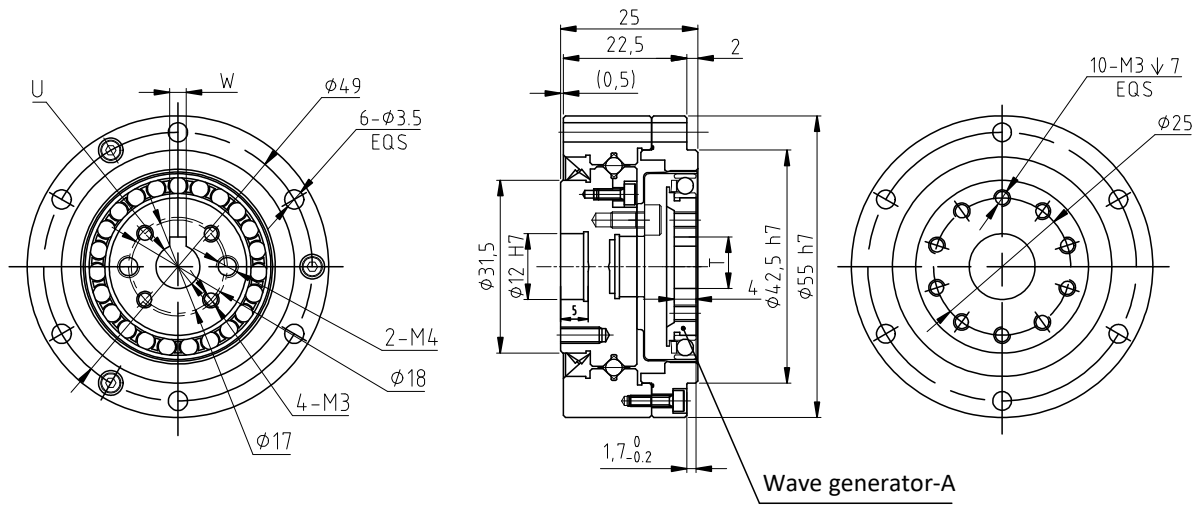

Model	U	T	W
Wave generator - A $\phi 6$	$\phi 6$ H7	$7^{+0.1}_0$	2P9/JS9
Wave generator - A $\phi 8$	$\phi 8$ H7	$9.4^{+0.1}_0$	3P9/JS9
Wave generator - A $\phi 11$	$\phi 11$ H7		

FSD-14-P-XX-U-I

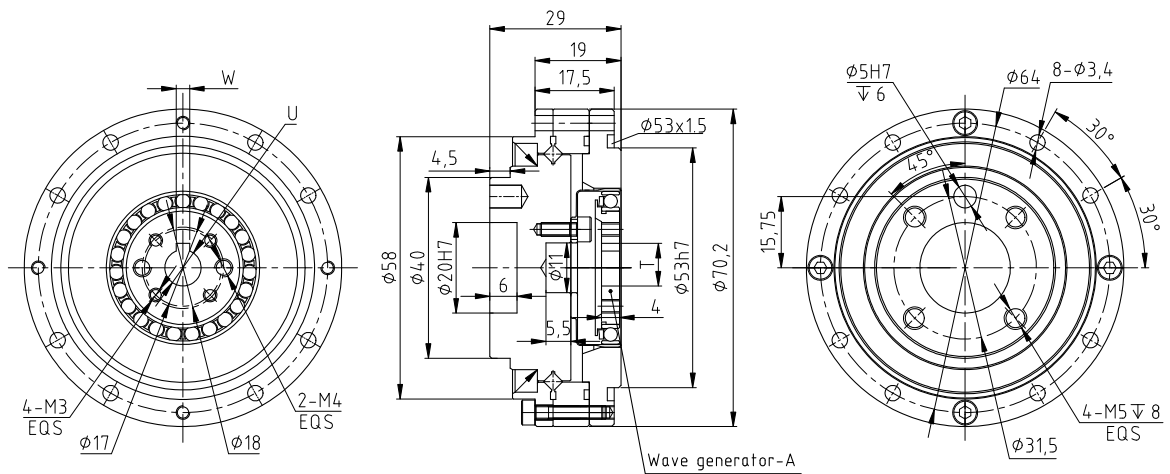


Model	U	T	W
Wave generator - A $\phi 6$	$\phi 6$ H7	$7^{+0.1}_0$	2P9/JS9
Wave generator - A $\phi 8$	$\phi 8$ H7	$9.4^{+0.1}_0$	3P9/JS9
Wave generator - A $\phi 11$	$\phi 11$ H7		

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
14	50	3.7	0.38	12	1.2	4.8	0.49	24	2.4	8500	3500	≤ 20	0.37	9000
	80	5.4	0.55	16	1.6	7.7	0.79	35	3.6					10000
	100	5.4	0.55	19	1.9	7.7	0.79	35	3.6					10000


OUTLINE DRAWING

FSD-17-XX-U-I

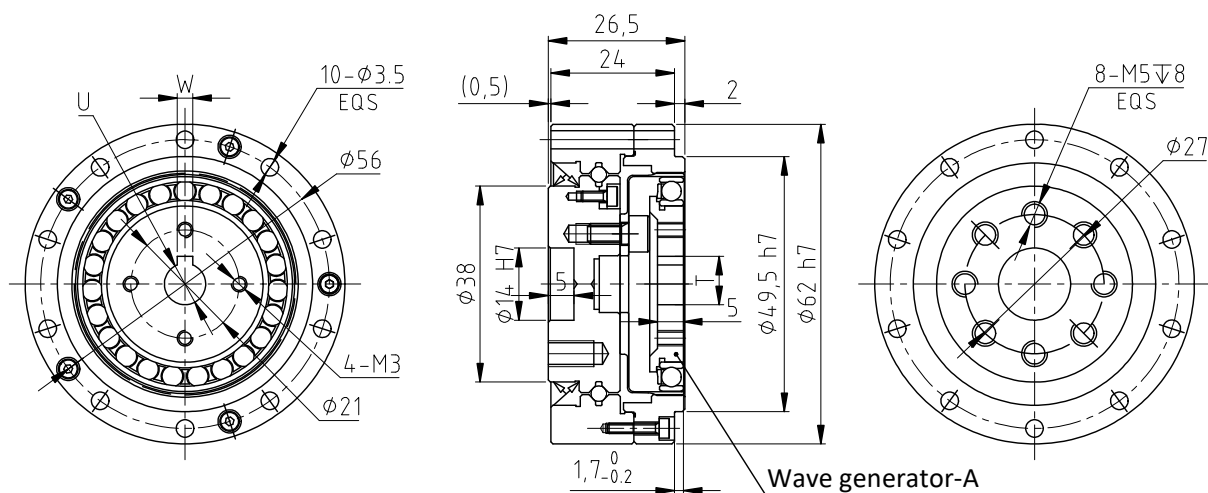

Model	U	T	W
Wave generator - A φ8	φ8H7	9.4 ^{+0.1}	3P9/JS9
Wave generator - A φ11	φ11H7		

FSD-20-XX-U-I

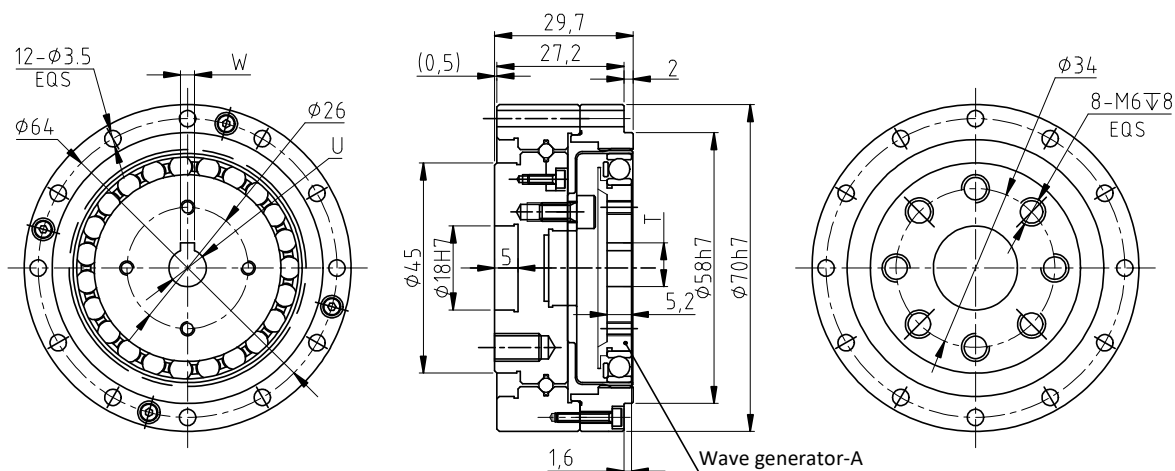


Model	U	T	W
Wave generator - A φ8	φ8H7	9.4 ^{+0.1}	3JS9/P9
Wave generator - A φ20	φ20H7		

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
17	50	11	1.1	23	2.3	18	1.8	48	4.9	7300	3500	≤20	0.46	9000
	80	15	1.5	29	3	19	1.9	61	6.2					10000
	100	16	1.6	37	3.8	27	2.8	71	7.2					10000
20	50	17	1.7	39	4	24	2.4	69	7	6500	3500	≤20	0.65	9000
	80	24	2.4	51	5.2	33	3.4	89	9.1					10000
	100	28	2.9	57	5.8	34	3.5	95	9.7					10000


FSD-17-XX-U-I
FSD-20-XX-U-I

OUTLINE DRAWING

FSD-25-XX-U-I

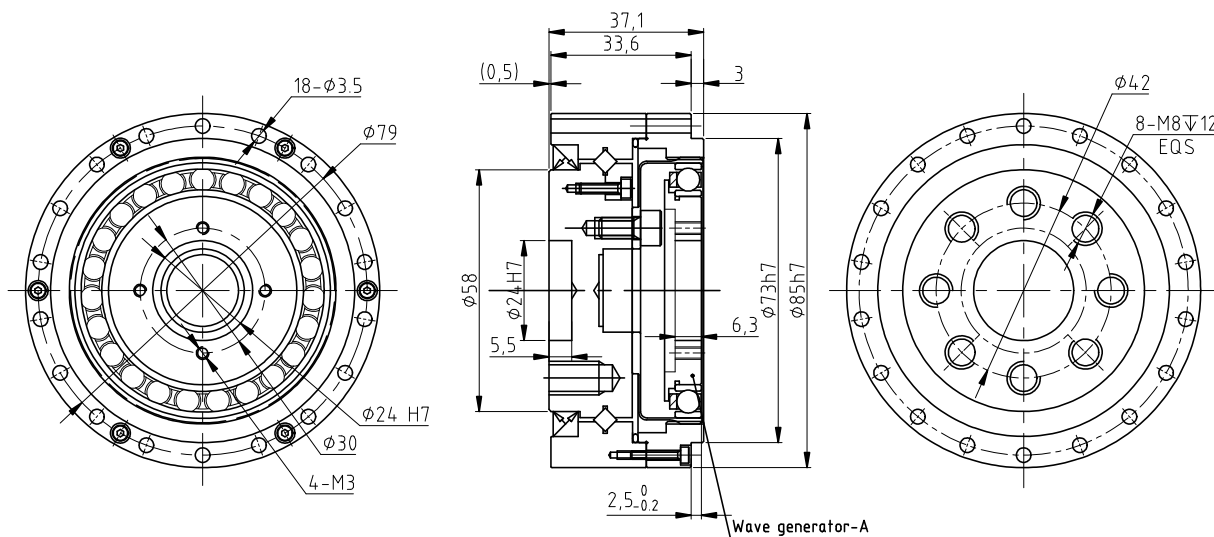

FSD-32-XX-U-I

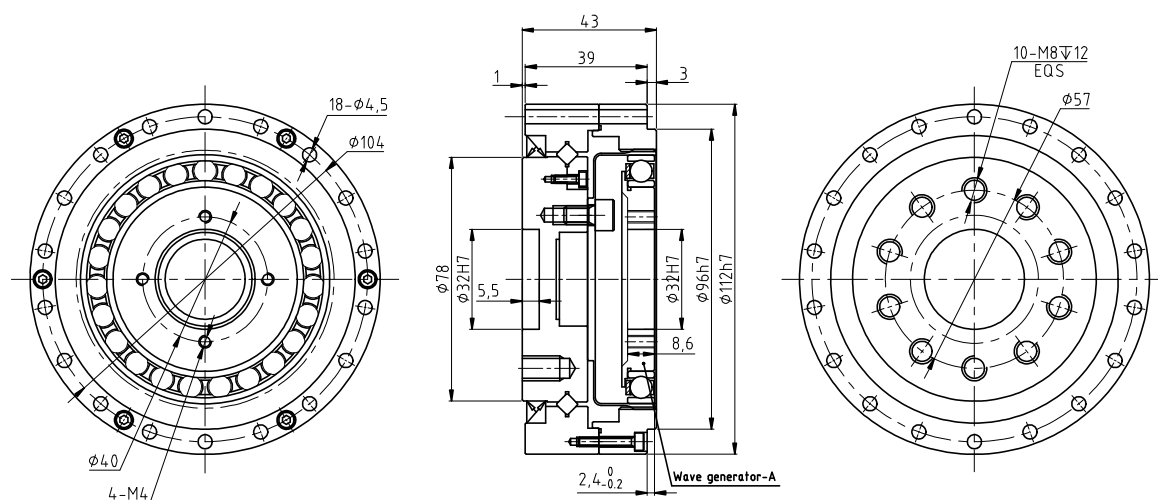

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
25	50	27	2.8	69	7	38	3.9	127	13	5600	3500	≤20	1.2	9000
	80	44	4.5	96	9.8	60	6.1	179	18					10000
	100	47	4.8	110	11	75	7.6	184	19					10000
32	50	53	5.4	151	15	75	7.6	268	27	4800	3500	≤20	2.4	9000
	80	83	8.5	213	22	117	12	398	41					10000
	100	96	9.8	233	24	151	15	420	43					10000



FH SERIES

INTRODUCTION OF FHT/FHN/FHG



Hollow type FHG/FHT/FHN-III



Simple type FHG/FHT-I



Simple type FHG/FHT-II



Input shaft type FHG/FHT-IV



Simple unit type FHG/FHT-V

FHT/FHN/FHG

FHT series

Unit type that with large diameter hollow shaft, which is easy to operate.

FHN series

Light weight product, 20% lighter than standard products.

FHG series

High torque. Compare with standard products, FHG series torque capacity is 30% higher and the service life is increased by 43%, with high load capacity and high reliability.


■ Application

- Industrial Robot
- Service Robots
- Medical Devices
- Automation and Special Equipment
- Printed Circuit Manufacturing Equipment

INTRODUCTION OF FHT/FHN/FHG


Unit type structure of FHT series

Hollow type

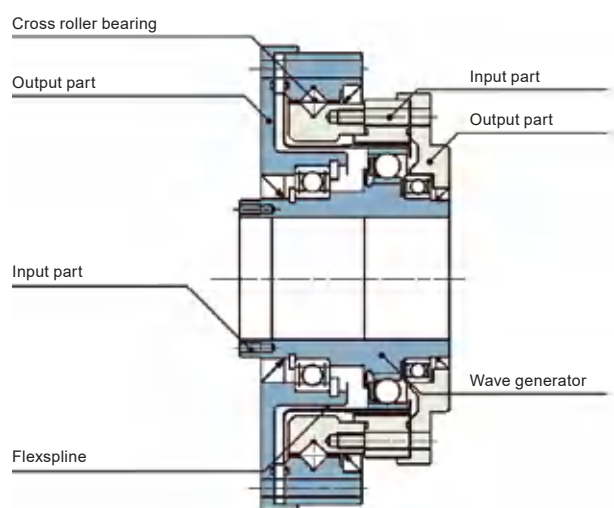


FHT/FHN/FHG-III

Input shaft type

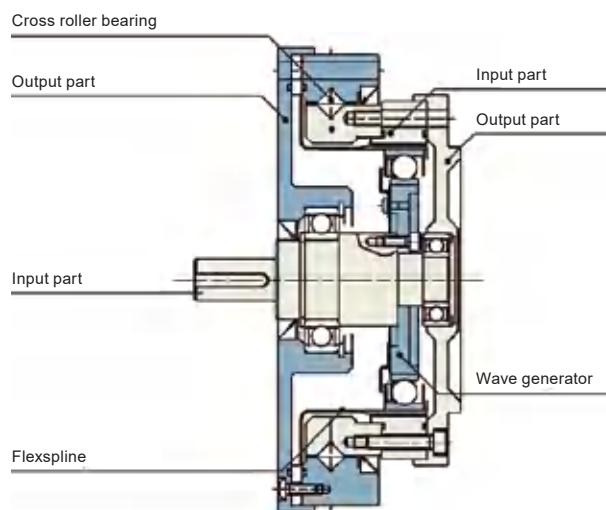


FHT/FHN/FHG-IV

Simple type

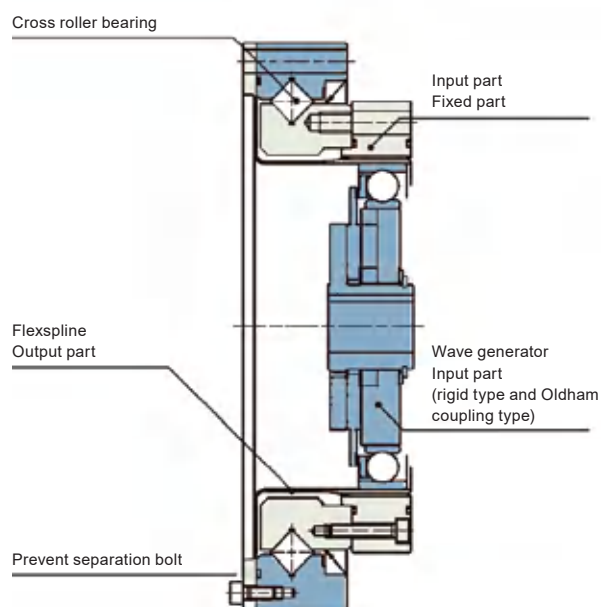

FHT/FHG-I/II

Simple Unit type

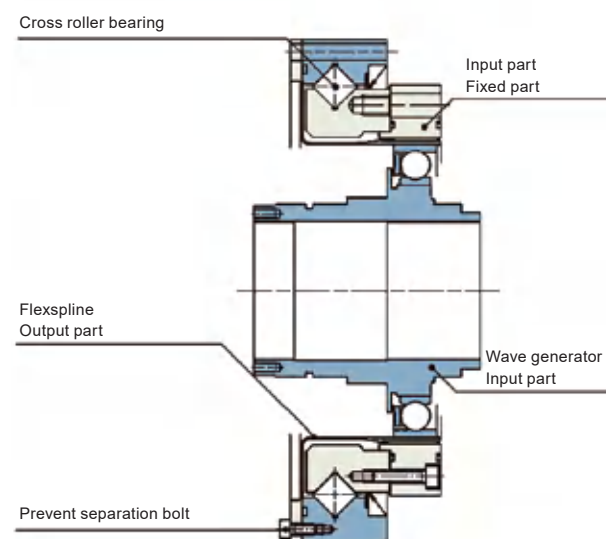

FHT/FHG-V

TECHNICAL DATA OF FHT/FHN/FHG

Rating table of FHT/FHN

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed (Grease lubricant)	Permissible ave. input rotational speed (Grease lubricant)	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
11	50	3.5	0.36	8.3	0.85	5.5	0.56	17	1.73	8500	3500	≤30	FHT-I: 0.27	10000
	100	5	0.51	11	1.12	8.9	0.91	25	2.55					10000
14	50	5.4	0.55	18	1.8	6.9	0.7	35	3.6	8500	3500	≤20	FHT-I/II: 0.4 FHT-III: 0.7 FHT-IV: 0.66 FHT-V: 0.4 FHT-C: 0.14 FHN-III: 0.55 FHN-IV: 0.5	10000
	80	7.8	0.8	23	2.4	11	1.1	47	4.8					15000
	100	7.8	0.8	28	2.9	11	1.1	54	5.5					15000
17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤20	FHT-I/II: 0.54 FHT-III: 0.99 FHT-IV: 0.9 FHT-V: 0.62 FHT-C: 0.19 FHN-III: 0.79 FHN-IV: 0.69	10000
	80	22	2.2	43	4.4	27	2.7	87	8.9					15000
	100	24	2.4	54	5.5	39	4	108	11					15000
	120	24	2.4	54	5.5	39	4	86	8.8					15000
20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤20	FHT-I/II: 0.72 FHT-III: 1.32 FHT-IV: 1.29 FHT-V: 0.82 FHT-C: 0.27 FHN-III: 1.04 FHN-IV: 0.98	10000
	80	34	3.5	74	7.5	47	4.8	127	13					15000
	100	40	4.1	82	8.4	49	5	147	15					15000
	120	40	4.1	87	8.9	49	5	147	15					15000
	160	40	4.1	92	9.4	49	5	147	15					15000
25	50	39	4	98	10	55	5.6	186	19	5600	3500	≤20	FHT-I/II: 1.22 FHT-III: 2.02 FHT-IV: 1.99 FHT-V: 1.4 FHT-C: 0.46 FHN-III: 1.6 FHN-IV: 1.43	10000
	80	63	6.4	137	14	87	8.9	255	26					15000
	100	67	6.8	157	16	108	11	284	29					15000
	120	67	6.8	167	17	108	11	304	31					15000
	160	67	6.8	176	18	108	11	314	32					15000
32	50	76	7.8	216	22	108	11	382	39	4800	3500	≤20	FHT-I/II: 2.54 FHT-III: 4.2 FHT-IV: 4 FHT-V: 2.7 FHT-C: 1 FHN-III: 3.19 FHN-IV: 3.17	10000
	80	118	12	304	31	167	17	568	58					15000
	100	137	14	333	34	216	22	647	66					15000
	120	137	14	353	36	216	22	686	70					15000
	160	137	14	372	38	216	22	686	70					15000
40	50	137	14	402	41	196	20	686	70	4000	3000	≤20	FHT-I/II: 4.4 FHT-III: 7.2 FHT-IV: 7 FHT-V: 4.06 FHT-C: 1.87 FHN-III: 5.95	10000
	80	206	21	519	53	284	29	980	100					15000
	100	265	27	568	58	372	38	1080	110					15000
	120	294	30	617	63	451	46	1180	120					15000
	160	294	30	647	66	451	46	1180	120					15000

TECHNICAL DATA OF FHT/FHN/FHG

Rating table of FHG

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed (Grease lubricant)	Permissible ave. input rotational speed (Grease lubricant)	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
14	50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤20	FHG-I/II: 0.4 FHG-III: 0.7 FHG-IV: 0.66 FHG-V: 0.4	10000
	80	10	1	30	3.1	14	1.4	61	6.2					15000
	100	10	1	36	3.7	14	1.4	70	7.2					15000
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤20	FHG-I/II: 0.54 FHG-III: 0.99 FHG-IV: 0.9 FHG-V: 0.62	10000
	80	29	2.9	56	5.7	35	3.6	113	12					15000
	100	31	3.2	70	7.2	51	5.2	143	15					15000
	120	31	3.2	70	7.2	51	5.2	112	11					15000
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤20	FHG-I/II: 0.72 FHG-III: 1.32 FHG-IV: 1.29 FHG-V: 0.82	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤20	FHG-I/II: 1.22 FHG-III: 2.02 FHG-IV: 1.99 FHG-V: 1.4	10000
	80	82	8.4	178	18	113	12	332	34					15000
	100	87	8.9	204	21	140	14	369	38					15000
	120	87	8.9	217	22	140	14	395	40					15000
	160	87	8.9	229	23	140	14	408	42					15000
32	50	99	10	281	29	140	14	497	51	4800	3500	≤20	FHG-I/II: 2.54 FHG-III: 4.2 FHG-IV: 4 FHG-V: 2.7	15000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	178	18	484	49	281	29	892	91					15000
40	50	178	18	523	53	255	26	892	91	4000	3000	≤20	FHG-I/II: 4.4 FHG-III: 7.2 FHG-IV: 7 FHG-V: 5.4	10000
	80	268	27	675	69	369	38	1270	130					15000
	100	345	35	738	75	484	49	1400	143					15000
	120	382	39	802	82	586	60	1530	156					15000
	160	382	39	841	86	586	60	1530	156					15000
45	80	407	41	918	94	507	52	1651	168	3800	3000	≤20	FHG-I: 6.5 FHG-III: 6.5	15000
	100	459	47	982	100	650	66	2041	208					15000
	120	523	53	1070	109	806	82	2288	233					15000
50	80	484	49	1223	125	675	69	2418	247	3500	2500	≤20	FHG-I: 9.6 FHG-III: 14.5	15000
	100	611	62	1247	130	866	88	2678	273					15000
	120	688	70	1404	143	1057	108	2678	273					15000

TECHNICAL DATA OF FHT/FHN/FHG

Transmission accuracy

unit: arc min

Reduction ratio \ Type	11	14	17	20	25	32	40	45	50
50	2	1.5	1.5	1	1	1	1	—	—
above 50	2	1.5	1.5	1	1	1	1	1	1

Hysteresis loss

unit: arc min


Reduction ratio \ Type	11	14	17	20	25	32	40	45	50
50	2	2	2	2	2	2	2	—	—
above 50	2	1	1	1	1	1	1	1	1

Torsional stiffness


Project	Type	Unit	11	14	17	20	25	32	40	45	50
T1		Nm	0.8	2	3.9	7	14	29	54	76	108
T2		Nm	2	6.9	12	25	48	108	196	275	382
Reduction 50	K1	$\times 10^4$ Nm/rad	0.221	0.34	0.81	1.3	2.5	5.4	10	—	—
	K2	$\times 10^4$ Nm/rad	0.3	0.47	1.1	1.8	3.4	7.8	14	—	—
	K3	$\times 10^4$ Nm/rad	0.32	0.57	1.3	2.3	4.4	9.8	18	—	—
Reduction ratio above 50	K1	$\times 10^4$ Nm/rad	0.267	0.47	1	1.6	3.1	6.7	13	18	25
	K2	$\times 10^4$ Nm/rad	0.333	0.61	1.4	2.5	5	11	20	29	40
	K3	$\times 10^4$ Nm/rad	0.432	0.71	1.6	2.9	5.7	12	23	33	44

OUTLINE DRAWING

FHT-14-XX-C-I

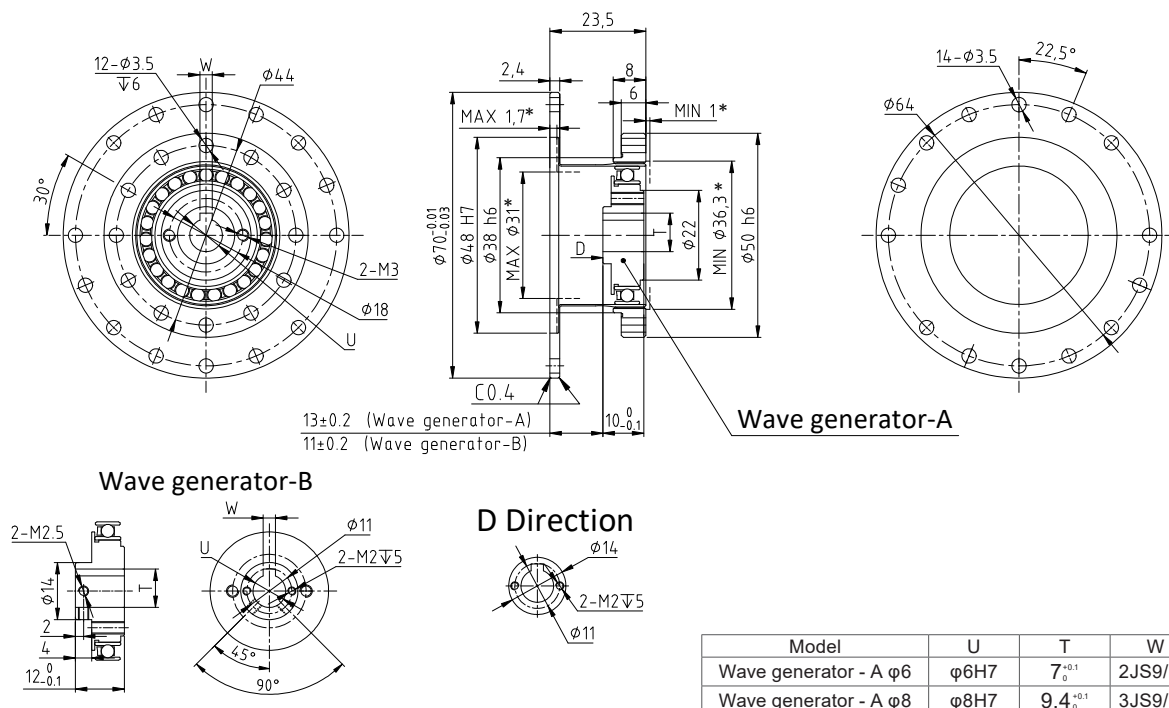

FHT-17-XX-C-I

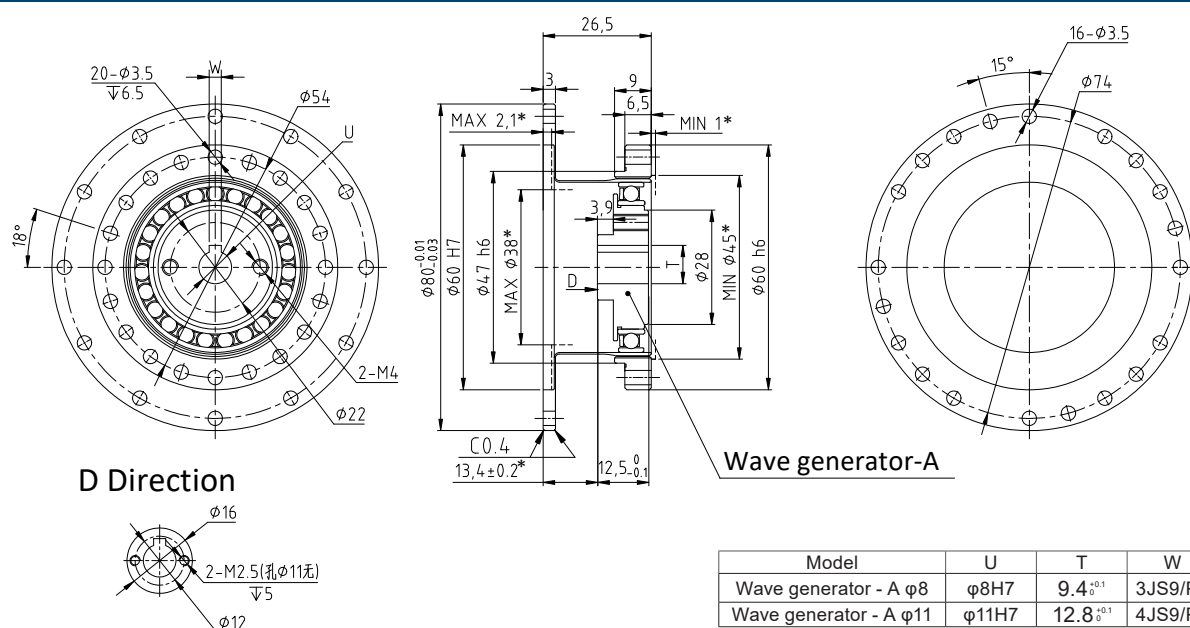

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
14	50	5.4	0.55	18	1.8	6.9	0.7	35	3.6	8500	3500	≤ 20	0.14	10000
	80	7.8	0.8	23	2.4	11	1.1	47	4.8					15000
	100	7.8	0.8	28	2.9	11	1.1	54	5.5					15000
17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤ 20	0.19	10000
	80	22	2.2	43	4.4	27	2.7	87	8.9					15000
	100	24	2.4	54	5.5	39	4	108	11					15000
	120	24	2.4	54	5.5	39	4	86	8.8					15000

Wave generator-A

The drawing includes three views of the wave generator:

- Front View (Left):** Shows a circular component with multiple concentric circles. Key features include:
 - Outer diameter: $\phi 90^{+0.03}_{-0.03}$
 - Inner diameter: $\phi 62$
 - Mounting holes: 16- $\phi 3.5$, 4- $\phi 3.5$, and 4-M4.
 - Internal feature U.
 - Angle: 22.5° .
 - Feature W.
- Side View (Middle):** Shows the profile of the wave generator. Key features include:
 - Total width: 29.
 - Top flange thickness: 3.
 - Flange outer diameter: $\phi 70 \text{ H7}$.
 - Flange inner diameter: MAX $\phi 45^*$.
 - Shaft diameter: D.
 - Shaft length: MIN 15^* .
 - Internal hole diameter: $\phi 33$.
 - Internal hole length: MIN $\phi 53^*$.
 - Bottom flange thickness: 7.5.
 - Bottom flange outer diameter: $\phi 70 \text{ h6}$.
 - Bottom flange inner diameter: MAX 2^* .
 - Bottom flange bore diameter: $\phi 33$.
 - Bottom flange bore length: MIN 1.5^* .
 - Bottom flange bore tolerance: C0.4.
 - Bottom flange bore position: $15 \pm 0.2^*$.
 - Bottom flange bore diameter: $13.5^{+0.1}_0$.
- Top View (Right):** Shows the top of the wave generator. Key features include:
 - Outer diameter: $\phi 84$.
 - Inner diameter: $20-\phi 3.5$.
 - Angle: 15° .

D Direction

A separate view shows the D direction, which is a cross-section of the shaft. Key features include:

- Shaft diameter: $\phi 22$.
- Internal hole diameter: $\phi 18$.
- Internal hole length: 2-M2.5.
- Internal hole position: $\sqrt{5}$.

Model	U	T
Wave generator - A $\phi 8$	$\phi 8\text{H7}$	$9.4^{+0.1}_0$
Wave generator - A $\phi 11$	$\phi 11\text{H7}$	$12.8^{+0.1}_0$

Model	U	T	W
Wave generator - A $\phi 8$	$\phi 8H7$	$9.4^{+0.1}$	3JS9/P9
Wave generator - A $\phi 11$	$\phi 11H7$	$12.8^{+0.1}$	4JS9/P9
Wave generator - A $\phi 14$	$\phi 14H7$	$16.3^{+0.1}$	5JS9/P9

Technical drawing of the Wave generator - A, showing front, side, and detail views with dimensions and a table of specifications.

Front View (Left): Shows a circular component with 4 process holes (Process Holes x 4), 4- $\phi 3.5$ holes, 16- $\phi 4.5$ holes, 4-M5 holes, and a central hole of $\phi 77$. The outer diameter is $\phi 110_{-0.01}^{+0.03}$. The inner diameter is $\phi 32$. The thickness is 11.25 mm. The angle between the process holes is 45°.

Side View (Middle): Shows the profile of the component with dimensions: 34, 13, 10, 3.3, MAX 2*, MIN 15*, 4.4, T, $\phi 4.0$, MIN $\phi 66$ *, $\phi 85$ h6, 17.5 ± 0.2 *, 14.5 ± 0.1 , and 0.4. The outer diameter is $\phi 88$ H7. The inner diameter is $\phi 56$ *. The thickness is 4.0 mm.

Detail View (Right): Shows a circular component with 4- $\phi 3.5$ holes, 12- $\phi 4.5$ holes, and a central hole of $\phi 102$. The angle between the process holes is 15°.

Detail View (Bottom): Shows a circular component with 2-M2.5 holes, a central hole of $\phi 18$, and a hole of $\phi 22$. The thickness is 5 mm.

Table of Specifications:


Model	U	T	W
Wave generator - A $\phi 11$	$\phi 11$ H7	12.8 ± 0.1	4JS9/P9
Wave generator - A $\phi 14$	$\phi 14$ H7	16.2 ± 0.1	5JS9/P9

Model	U	T	W
Wave generator - A $\phi 11$	$\phi 11H7$	$12.8^{+0.1}_0$	4JS9/P9
Wave generator - A $\phi 14$	$\phi 14H7$	$16.3^{+0.1}_0$	5JS9/P9


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤20	0.27	10000
	80	34	3.5	74	7.5	47	4.8	127	13					15000
	100	40	4.1	82	8.4	49	5	147	15					15000
	120	40	4.1	87	8.9	49	5	147	15					15000
	160	40	4.1	92	9.4	49	5	147	15					15000
25	50	39	4	98	10	55	5.6	186	19	5600	3500	≤20	0.46	10000
	80	63	6.4	137	14	87	8.9	255	26					15000
	100	67	6.8	157	16	108	11	284	29					15000
	120	67	6.8	167	17	108	11	304	31					15000
	160	67	6.8	176	18	108	11	314	32					15000

OUTLINE DRAWING

FHT-32-XX-C-I

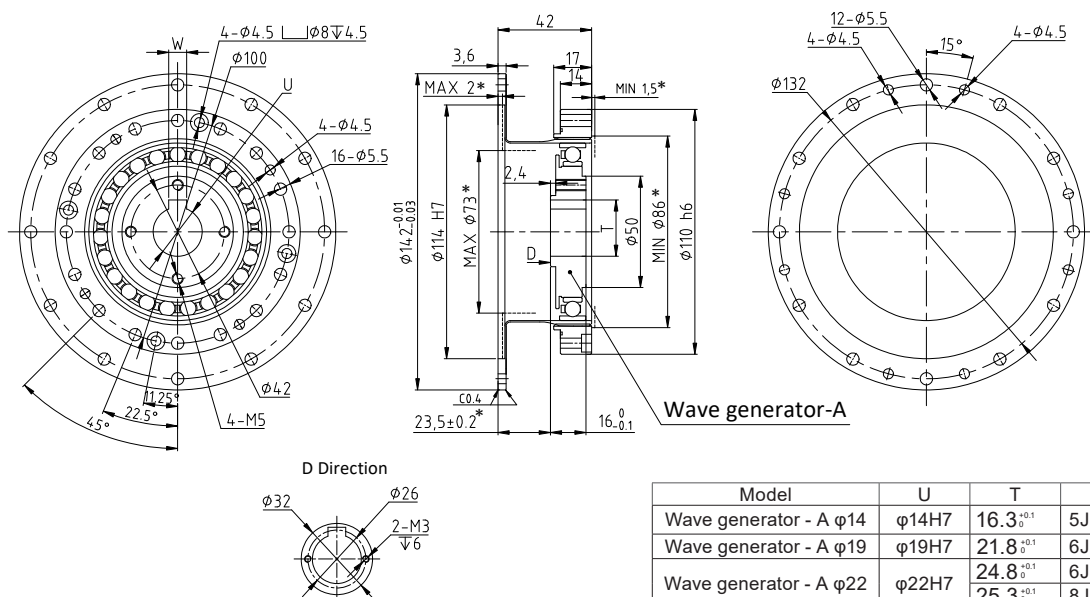


FHT-40-XX-C-I

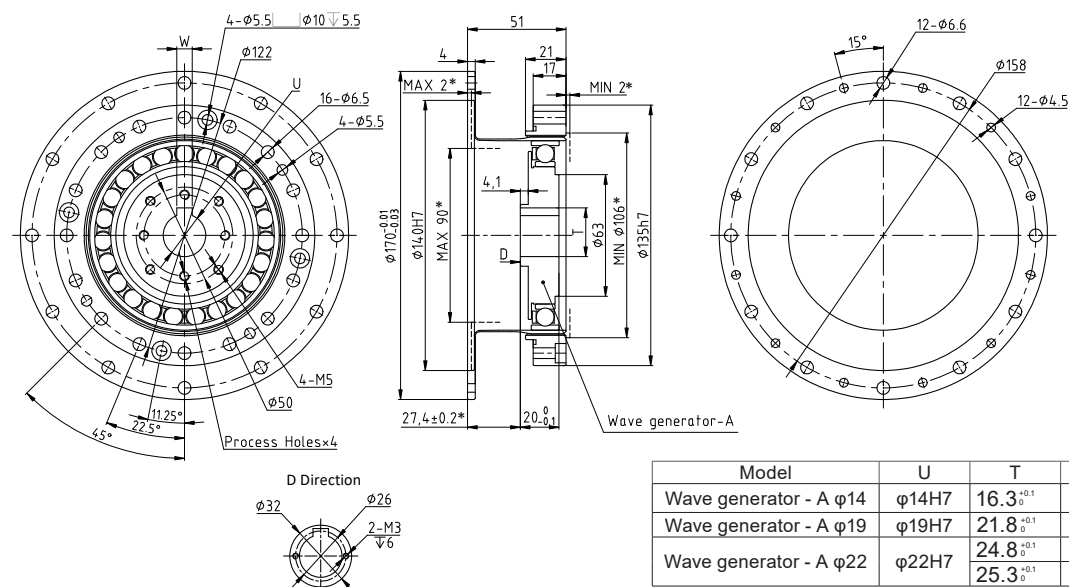

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
32	50	76	7.8	216	22	108	11	382	39	4800	3500	≤20	1	10000
	80	118	12	304	31	167	17	568	58					15000
	100	137	14	333	34	216	22	647	66					15000
	120	137	14	353	36	216	22	686	70					15000
	160	137	14	372	38	216	22	686	70					15000
40	50	137	14	402	41	196	20	686	70	4000	3000	≤20	1.87	10000
	80	206	21	519	53	284	29	980	100					15000
	100	265	27	568	58	372	38	1080	110					15000
	120	294	30	617	63	451	46	1180	120					15000
	160	294	30	647	66	451	46	1180	120					15000


OUTLINE DRAWING

FHT-11-XX-U-I

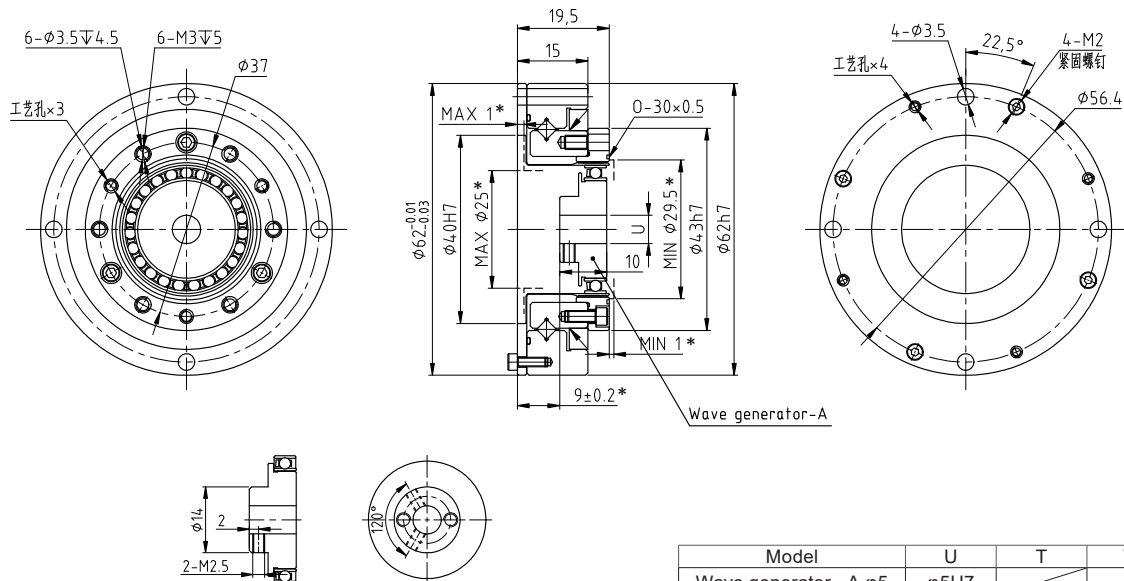

Model	U	T	W
Wave generator - A $\phi 5$	$\phi 5H7$		
Wave generator - A $\phi 6$	$\phi 7H7$		

FHT-14-XX-U-I

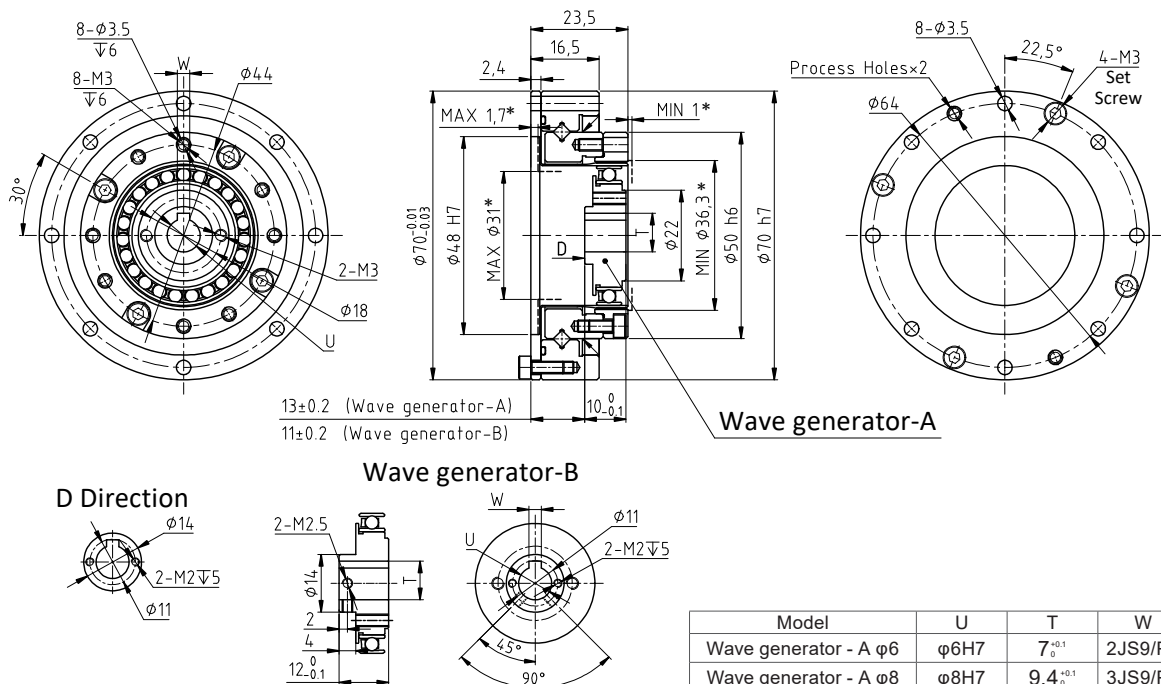


Model	U	T	W
Wave generator - A $\phi 6$	$\phi 6H7$	$7_{-0.1}^{+0.1}$	2JS9/P9
Wave generator - A $\phi 8$	$\phi 8H7$	$9.4_{-0.1}^{+0.1}$	3JS9/P9


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N-m	Kgf-m	N-m	Kgf-m	N-m	Kgf-m	N-m	Kgf-m	r/min	r/min	Arc Sec	kg	Hour
11	50	3.5	0.36	8.3	0.85	5.5	0.56	17	1.73	8500	3500	≤ 30	0.27	10000
	80	4.5	0.46	9.9	1.01	8	0.82	22.5	2.3					10000
	100	5	0.51	11	1.12	8.9	0.91	25	2.55					10000
14	50	5.4	0.55	18	1.8	6.9	0.7	35	3.6	8500	3500	≤ 20	0.4	10000
	80	7.8	0.8	23	2.4	11	1.1	47	4.8					15000
	100	7.8	0.8	28	2.9	11	1.1	54	5.5					15000

OUTLINE DRAWING

FHT-14-XX-U-I-LF

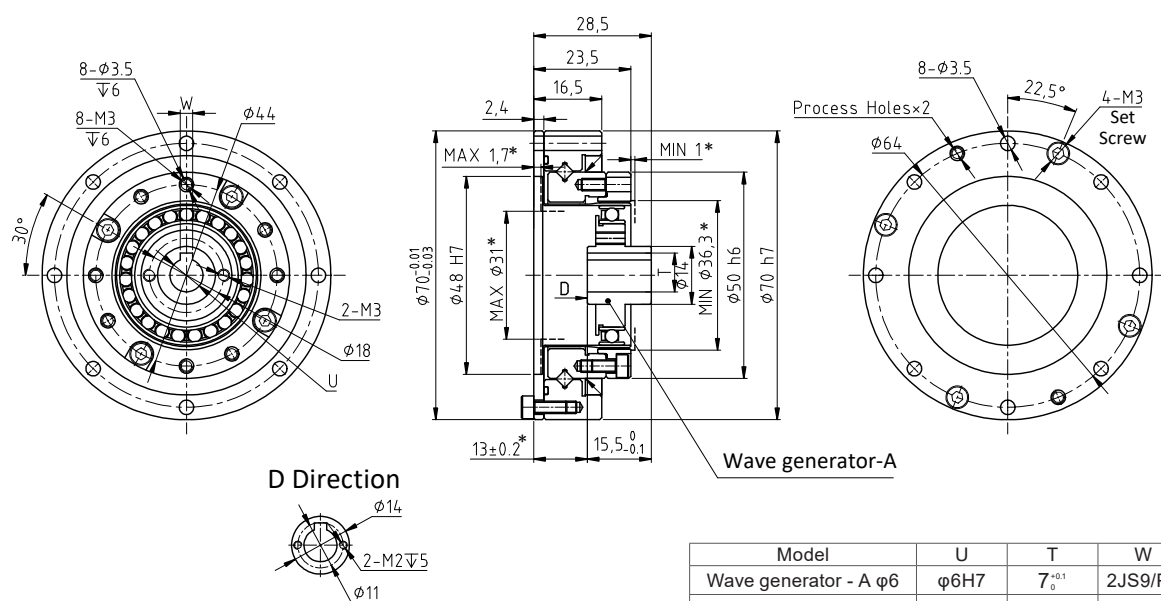

FHT-17-XX-U-I

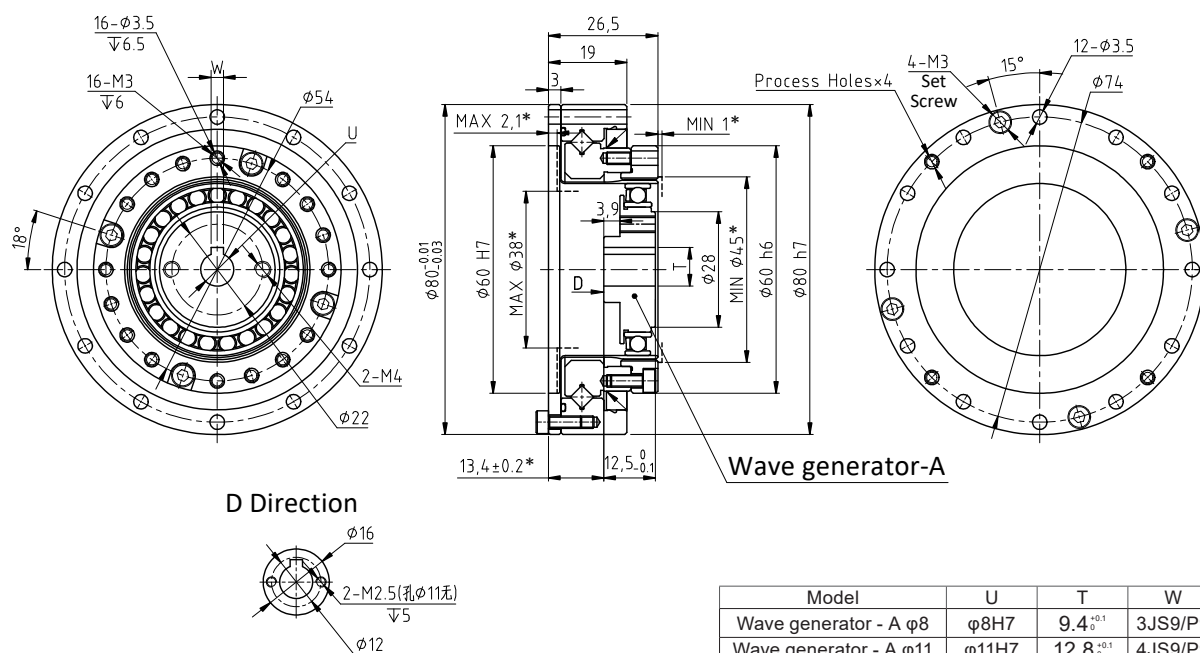


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
14	50	5.4	0.55	18	1.8	6.9	0.7	35	3.6	8500	3500	≤ 20	0.4	10000
	80	7.8	0.8	23	2.4	11	1.1	47	4.8					15000
	100	7.8	0.8	28	2.9	11	1.1	54	5.5					15000
17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤ 20	0.54	10000
	80	22	2.2	43	4.4	27	2.7	87	8.9					15000
	100	24	2.4	54	5.5	39	4	108	11					15000
	120	24	2.4	54	5.5	39	4	86	8.8					15000


FHT-14-XX-U-I
FHT-17-XX-U-I

OUTLINE DRAWING

FHT-17-XX-U-I-LF

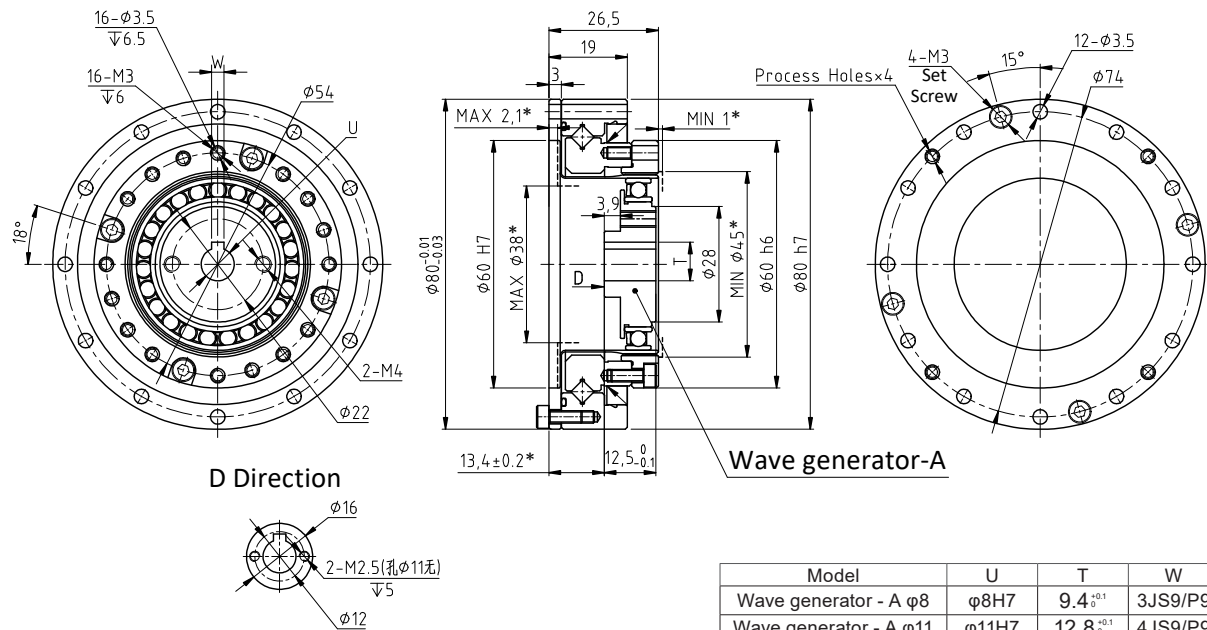


FHT-20-XX-U-I

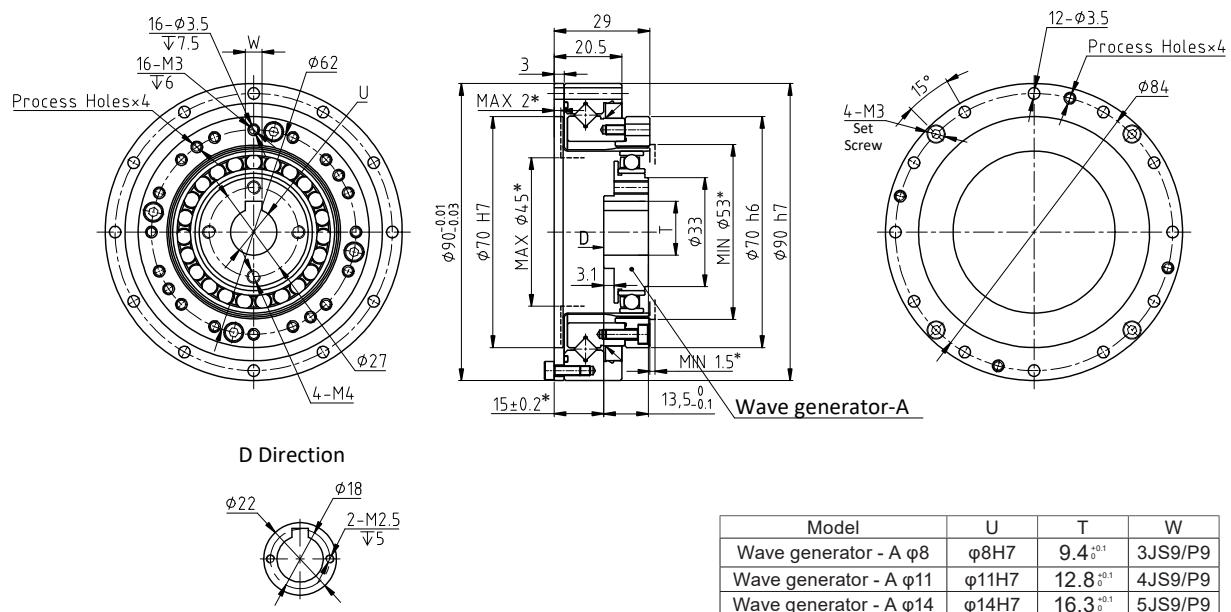


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤ 20	0.54	10000
	80	22	2.2	43	4.4	27	2.7	87	8.9					15000
	100	24	2.4	54	5.5	39	4	108	11					15000
	120	24	2.4	54	5.5	39	4	86	8.8					15000
20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤ 20	0.72	10000
	80	34	3.5	74	7.5	47	4.8	127	13					15000
	100	40	4.1	82	8.4	49	5	147	15					15000
	120	40	4.1	87	8.9	49	5	147	15					15000
	160	40	4.1	92	9.4	49	5	147	15					15000

OUTLINE DRAWING

FHT-20-XX-U-I-LF

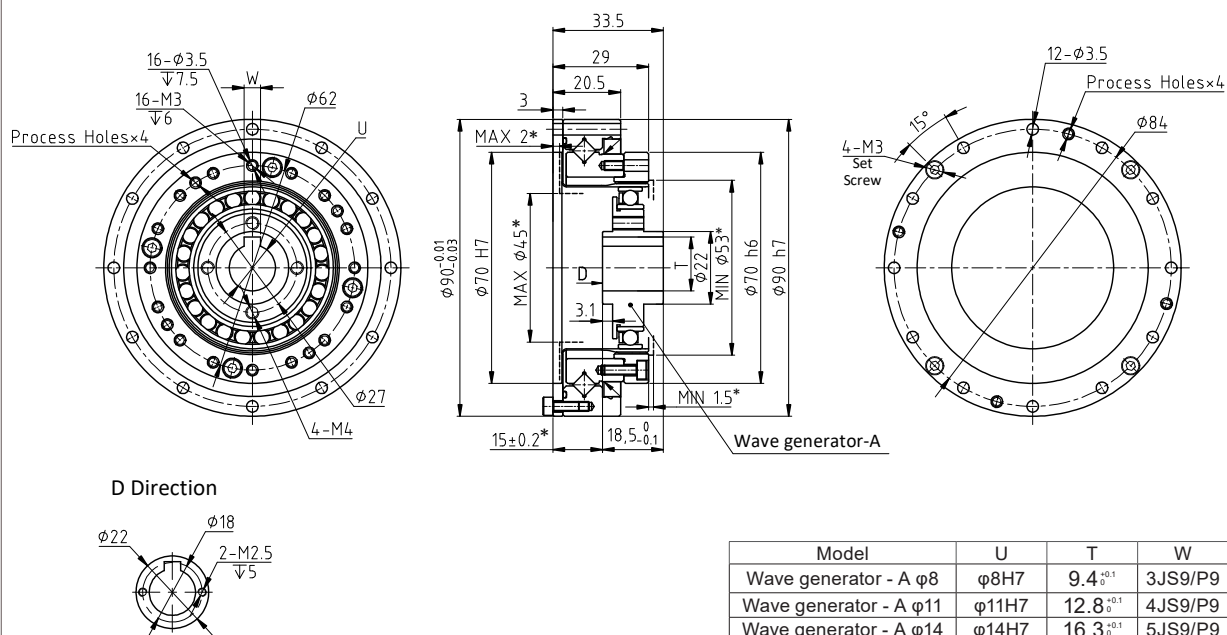

FHT-25-XX-U-I

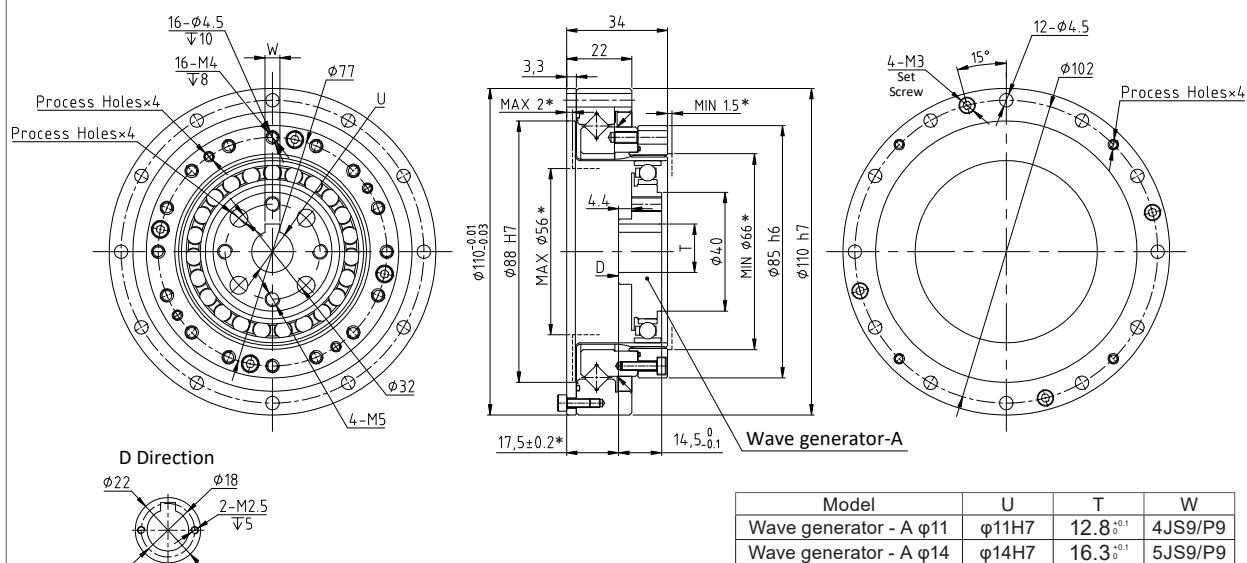

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
20	50	25	2.5	56	5.7	34	3.5	98	10	6500	3500	≤20	0.72	10000
	80	34	3.5	74	7.5	47	4.8	127	13					15000
	100	40	4.1	82	8.4	49	5	147	15					15000
	120	40	4.1	87	8.9	49	5	147	15					15000
	160	40	4.1	92	9.4	49	5	147	15					15000
25	50	39	4	98	10	55	5.6	186	19	5600	3500	≤20	1.22	10000
	80	63	6.4	137	14	87	8.9	255	26					15000
	100	67	6.8	157	16	108	11	284	29					15000
	120	67	6.8	167	17	108	11	304	31					15000
	160	67	6.8	176	18	108	11	314	32					15000

Technical drawing of the Wave generator - A, showing front, side, and detail views with dimensions and labels.

Front View (Left): Shows a circular component with multiple concentric rings of holes. Labels include: 16- $\phi 4.5$ (with $\downarrow 10$), 16-M4 (with $\downarrow 8$), $\phi 77$, U, Process Holes $\times 4$, $\phi 32$, and 4-M5.

Side View (Middle): Shows the profile of the component with various dimensions: 37, 34, 22, 3.3, MAX 2*, MIN 1.5*, $\phi 88$ h7, MAX $\phi 56$ *, $\phi 22$, MIN $\phi 66$ *, $\phi 85$ h6, $\phi 110$ h7, 17.5 ± 0.2 *, 19.5 $^{0}_{-0.1}$, and Wave generator-A.

Detail View (Right): Shows a circular detail with dimensions: 12- $\phi 4.5$, 15°, 4-M3 Set Screw, $\phi 102$, Process Holes $\times 4$, and $\phi 110$ h7.

Detail View (Bottom Left): Shows a circular detail with dimensions: $\phi 22$, $\phi 18$, 2-M2.5 (with $\downarrow 5$), and D Direction.

Model	U	T	W
Wave generator - A $\phi 11$	$\phi 11$ h7	12.8 $^{+0.1}_{-0}$	4JS9/P9
Wave generator - A $\phi 14$	$\phi 14$ h7	16.3 $^{+0.1}_{-0}$	5JS9/P9


Technical drawing of the Wave generator-A showing three views: front, side, and top. The front view shows a circular flange with 16 holes (16-φ5.5, 16-M5, φ100, φ42, 4-M5, Process Holes x4, U). The side view shows a cross-section with dimensions: 4.2, 27, 3.6, MAX 2*, MIN 1.5*, MAX φ114 h7, MAX φ73*, 2.4, MIN φ86*, φ50, MIN φ110 h6, φ14.2 h7, 23.5±0.2*, 16.0/0.1, and Wave generator-A. The top view shows a circular flange with 12 holes (12-φ5.5, 15°, 4-M4 Set Screw, φ132, Process Holes x4). A detail view shows the D Direction with dimensions: φ32, φ26, 2-M3, φ6.

Model	U	T	W
Wave generator - A φ14	φ14H7	16.3 ^{+0.1} ₀	5JS9/P9
Wave generator - A φ19	φ19H7	21.8 ^{+0.1} ₀	6JS9/P9
Wave generator - A φ22	φ22H7	24.8 ^{+0.1} ₀	6JS9/P9
		25.3 ^{+0.1} ₀	8JS9/P9


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
25	50	39	4	98	10	55	5.6	186	19	5600	3500	≤20	1.22	10000
	80	63	6.4	137	14	87	8.9	255	26					15000
	100	67	6.8	157	16	108	11	284	29					15000
	120	67	6.8	167	17	108	11	304	31					15000
	160	67	6.8	176	18	108	11	314	32					15000
32	50	76	7.8	216	22	108	11	382	39	4800	3500	≤20	2.54	10000
	80	118	12	304	31	167	17	568	58					15000
	100	137	14	333	34	216	22	647	66					15000
	120	137	14	353	36	216	22	686	70					15000
	160	137	14	372	38	216	22	686	70					15000

OUTLINE DRAWING

FHT-32-XX-U-I-LF

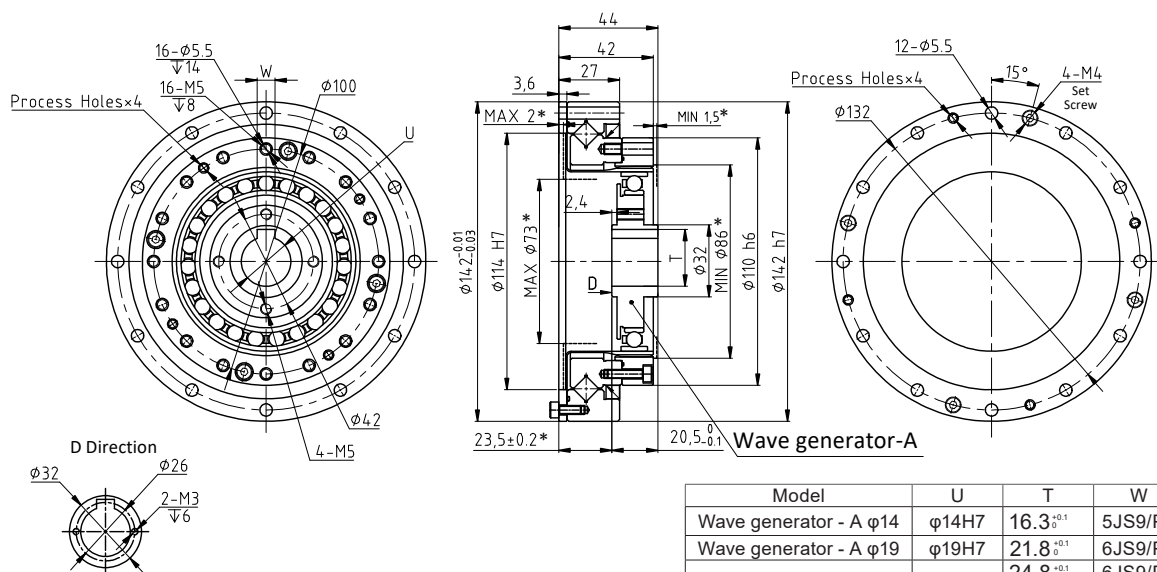

FHT-40-XX-U-I

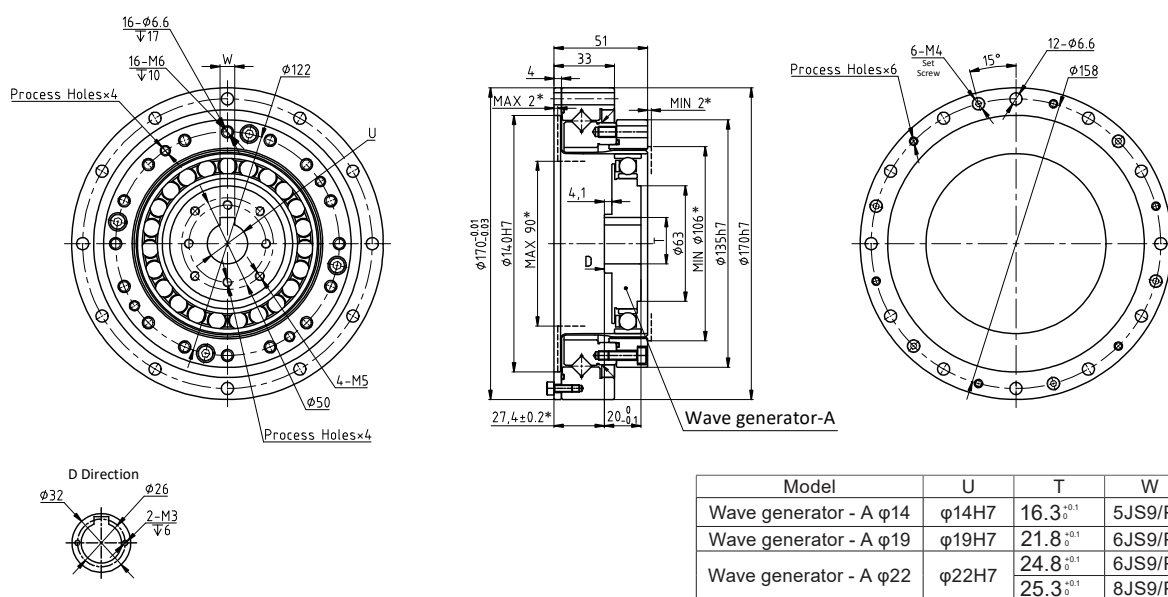


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
32	50	76	7.8	216	22	108	11	382	39	4800	3500	≤20	2.54	10000
	80	118	12	304	31	167	17	568	58					15000
	100	137	14	333	34	216	22	647	66					15000
	120	137	14	353	36	216	22	686	70					15000
	160	137	14	372	38	216	22	686	70					15000
40	50	137	14	402	41	196	20	686	70	4000	3000	≤20	4.4	10000
	80	206	21	519	53	284	29	980	100					15000
	100	265	27	568	58	372	38	1080	110					15000
	120	294	30	617	63	451	46	1180	120					15000
	160	294	30	647	66	451	46	1180	120					15000


FHT-32-XX-U-I-LF
FHT-40-XX-U-I

OUTLINE DRAWING

FHG-20-XX-C-I

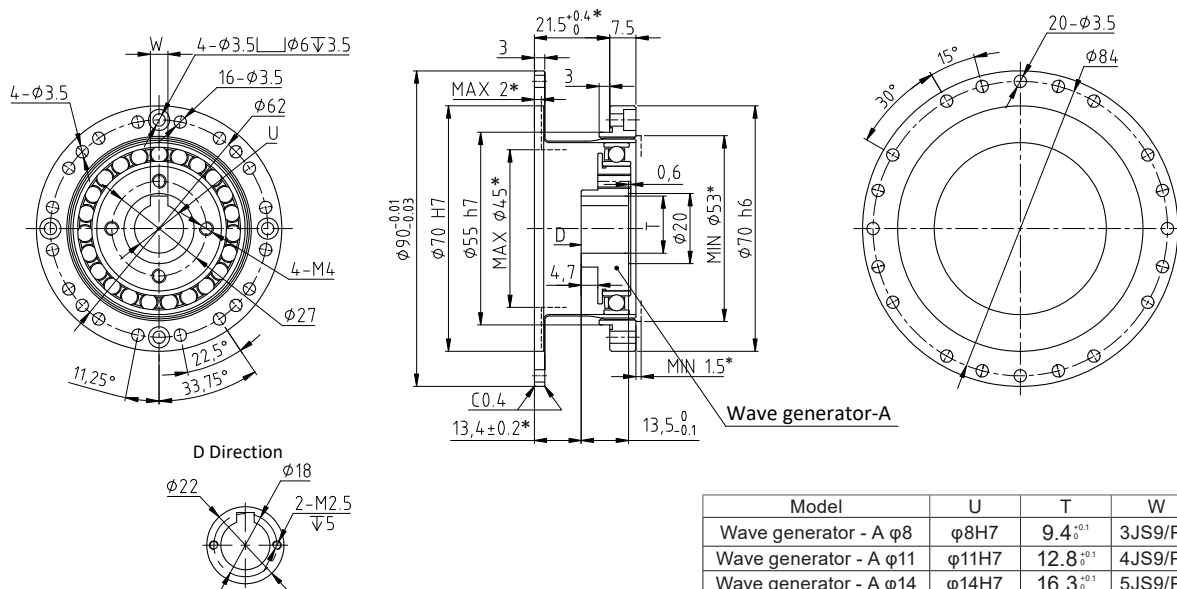


FHG-25-XX-C-I

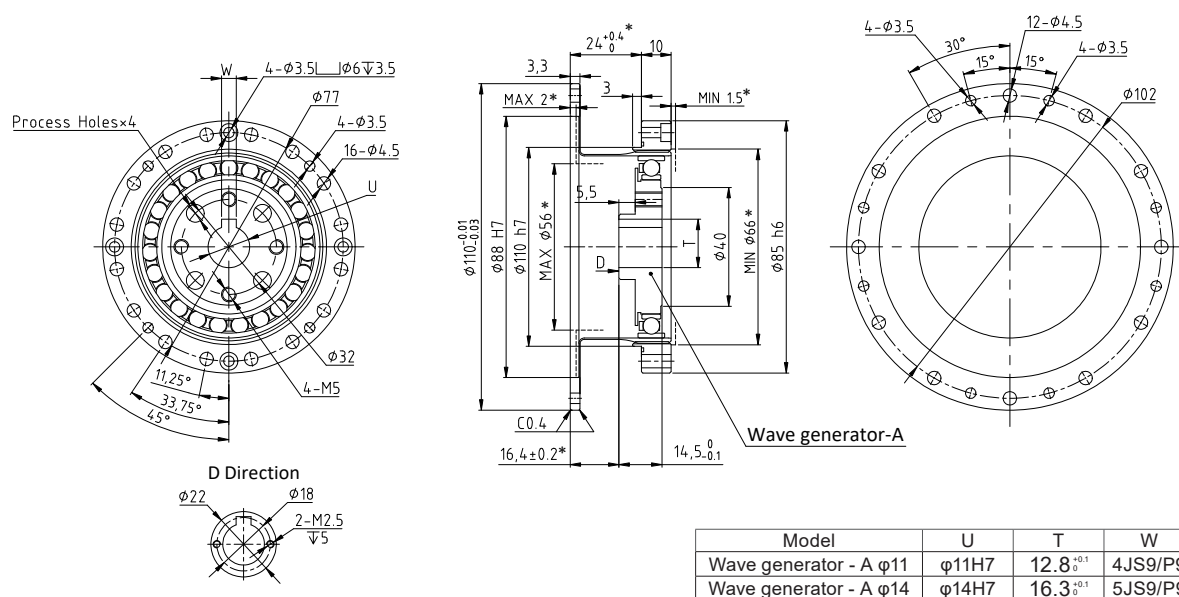


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤ 20	0.27	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤ 20	0.46	10000
	80	82	8.4	178	18	113	12	332	34					15000
	100	87	8.9	204	21	140	14	369	38					15000
	120	87	8.9	217	22	140	14	395	40					15000
	160	87	8.9	229	23	140	14	408	42					15000

OUTLINE DRAWING

FHG-32-XX-C-I

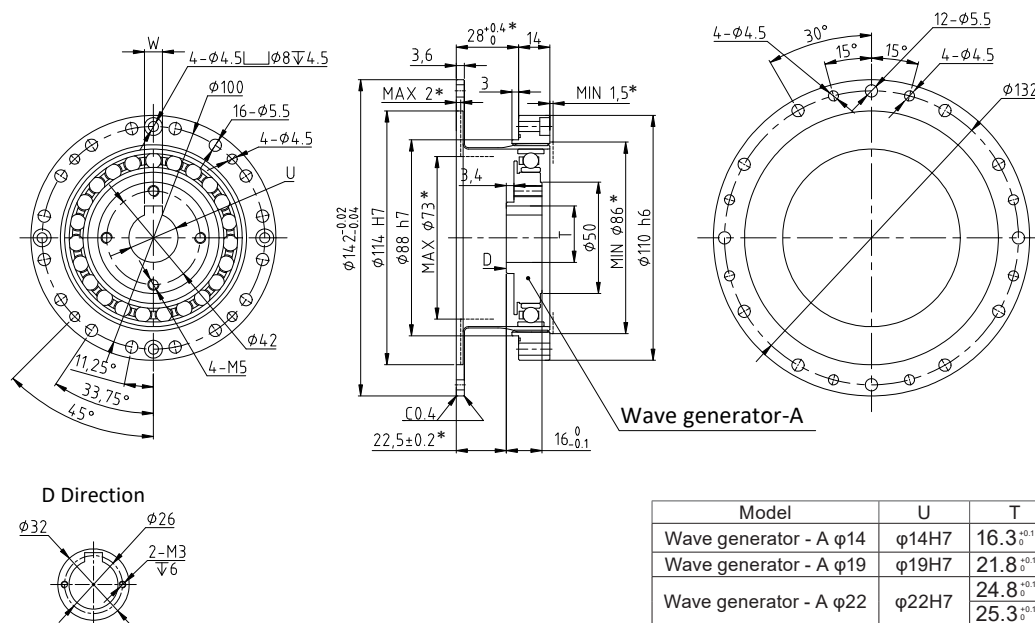


FHG-40-XX-C-I

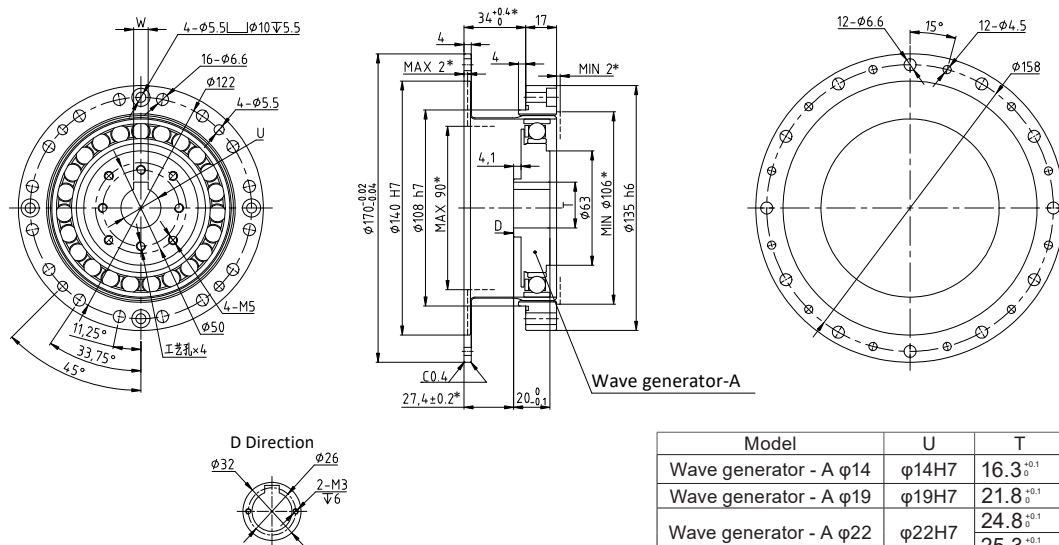


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
32	50	99	10	281	29	140	14	497	51	4800	3500	≤20	1	15000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	178	18	484	49	281	29	892	91					15000
40	50	178	18	523	53	255	26	892	91	4000	3000	≤20	1.87	10000
	80	268	27	675	69	369	38	1270	130					15000
	100	345	35	738	75	484	49	1400	143					15000
	120	382	39	802	82	586	60	1530	156					15000
	160	382	39	841	86	586	60	1530	156					15000

OUTLINE DRAWING


FHG-14-XX-U-I

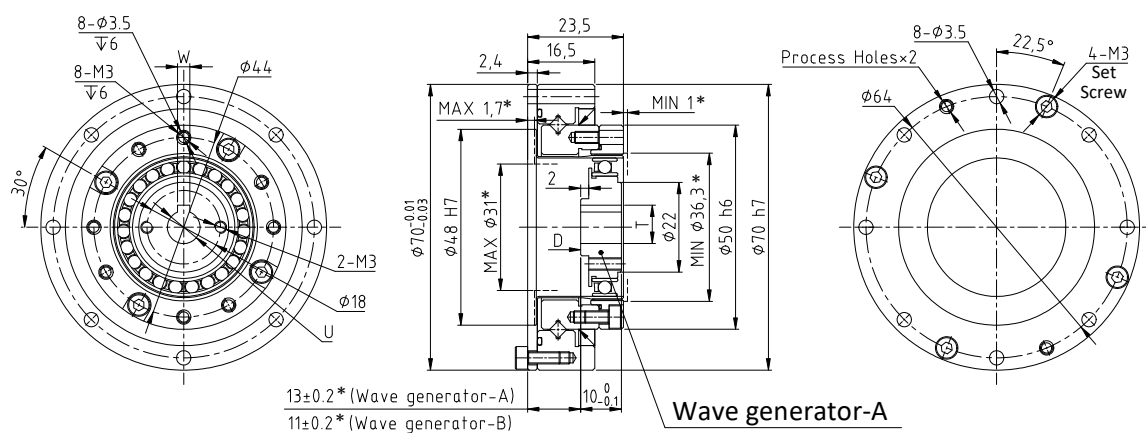

D Direction




Wave generator-B

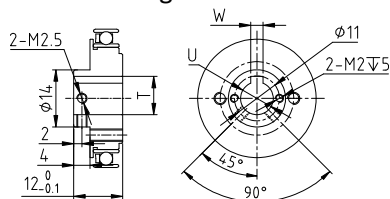


Model	U	T	W
Wave generator - A φ6	φ6H7	7 ^{+0.1} ₀	2JS9/P9
Wave generator - A φ8	φ8H7	9.4 ^{+0.1} ₀	3JS9/P9

FHG-17-XX-U-I

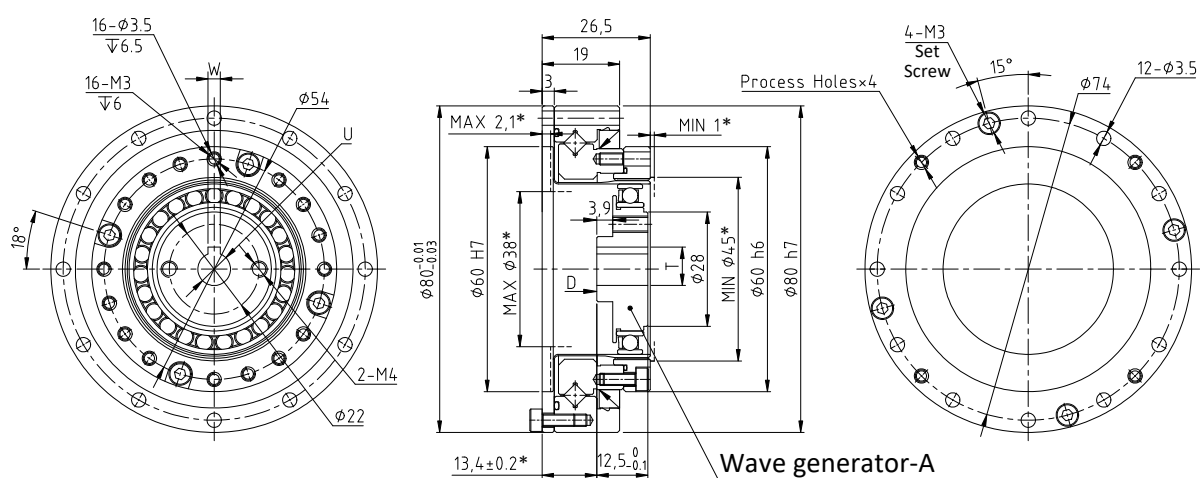

D Direction




Model	U	T	W
Wave generator - A φ8	φ8H7	9.4 ^{+0.1} ₀	3JS9/P9
Wave generator - A φ11	φ11H7	12.8 ^{+0.1} ₀	4JS9/P9

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
14	50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤20	0.4	10000
	80	10	1	30	3.1	14	1.4	61	6.2					15000
	100	10	1	36	3.7	14	1.4	70	7.2					15000
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤20	0.54	10000
	80	29	2.9	56	5.7	35	3.6	113	12					15000
	100	31	3.2	70	7.2	51	5.2	143	15					15000
	120	31	3.2	70	7.2	51	5.2	112	11					15000


FHG-14-XX-U-I
FHG-17-XX-U-I

OUTLINE DRAWING

FHG-20-XX-U-I

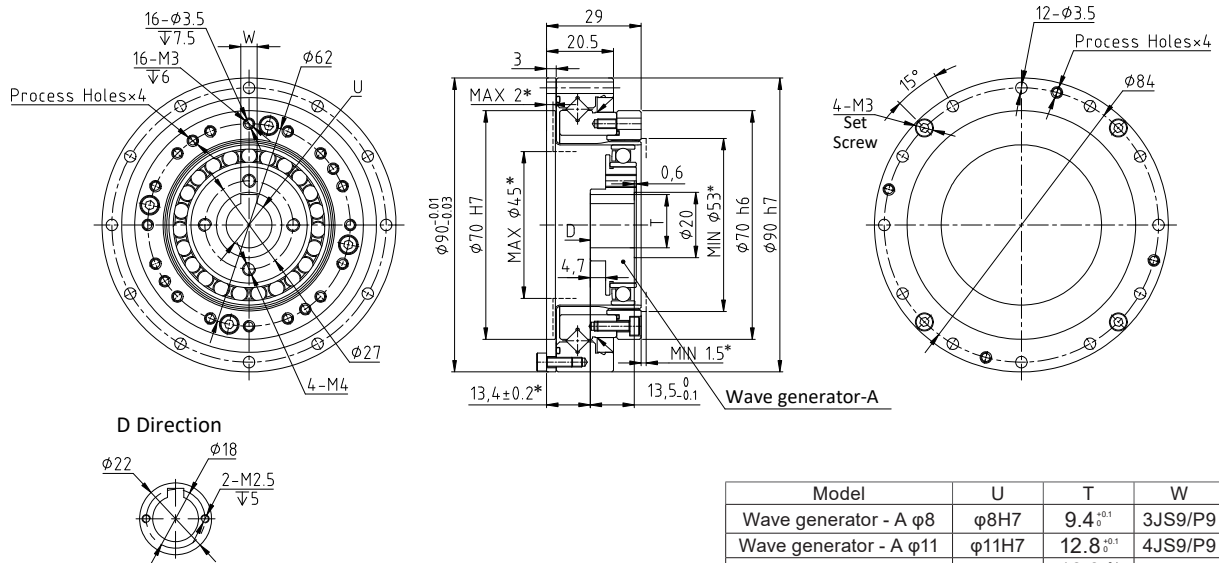


FHG-25-XX-U-I

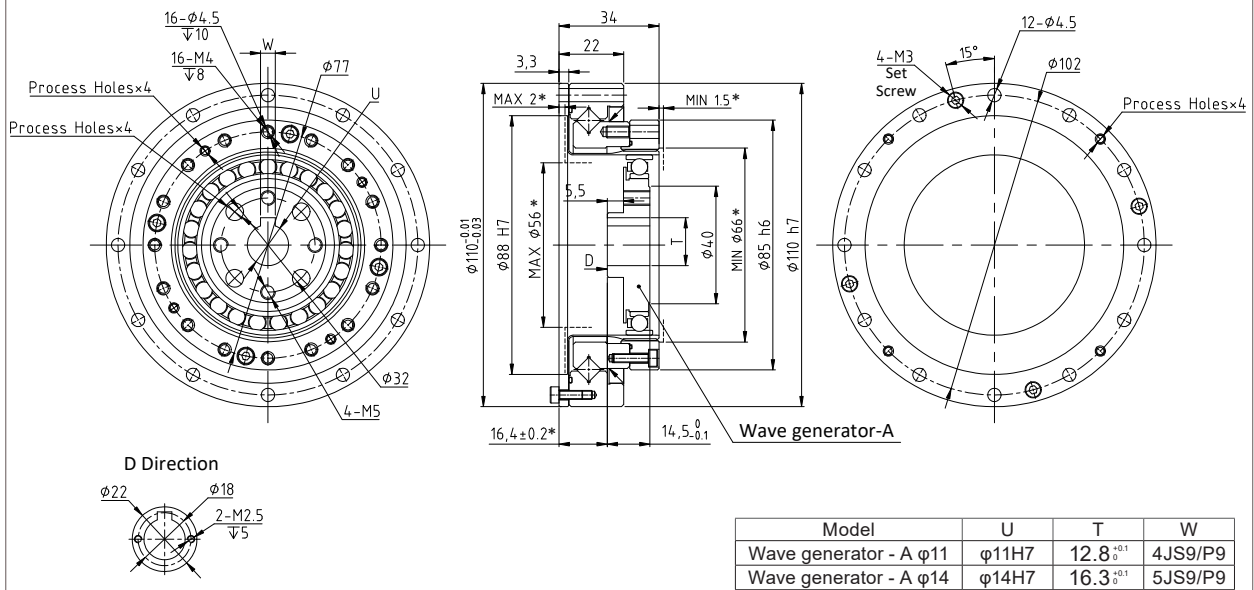


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤ 20	0.72	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤ 20	1.22	10000
	80	82	8.4	178	18	113	12	332	34					15000
	100	87	8.9	204	21	140	14	369	38					15000
	120	87	8.9	217	22	140	14	395	40					15000
	160	87	8.9	229	23	140	14	408	42					15000

OUTLINE DRAWING

FHG-32-XX-U-I

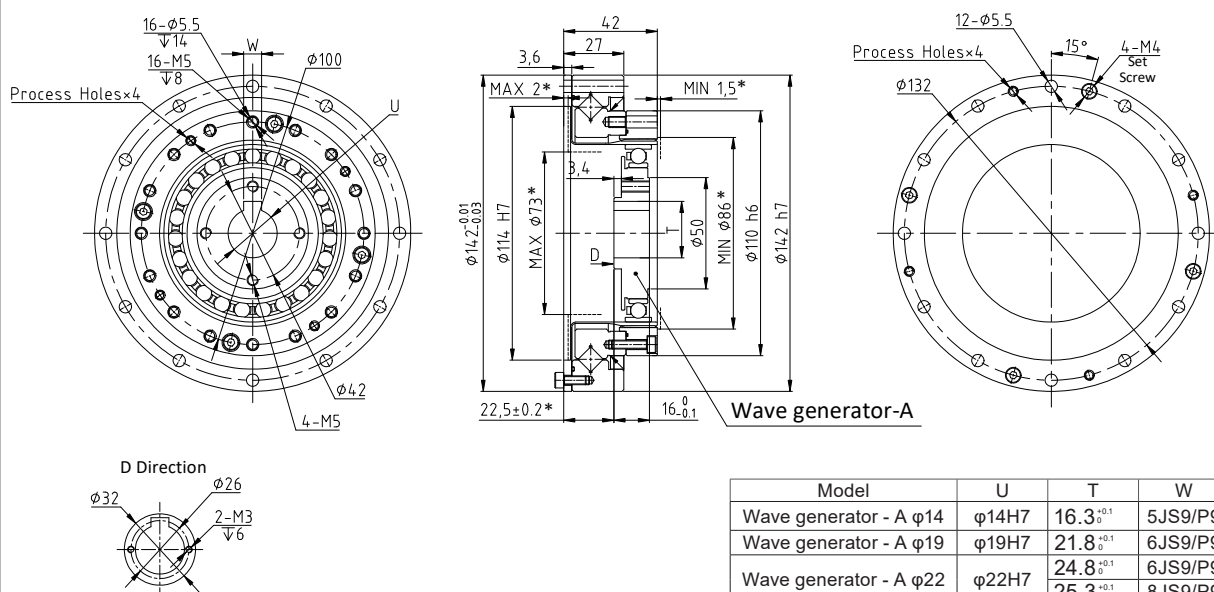


FHG-40-XX-U-I

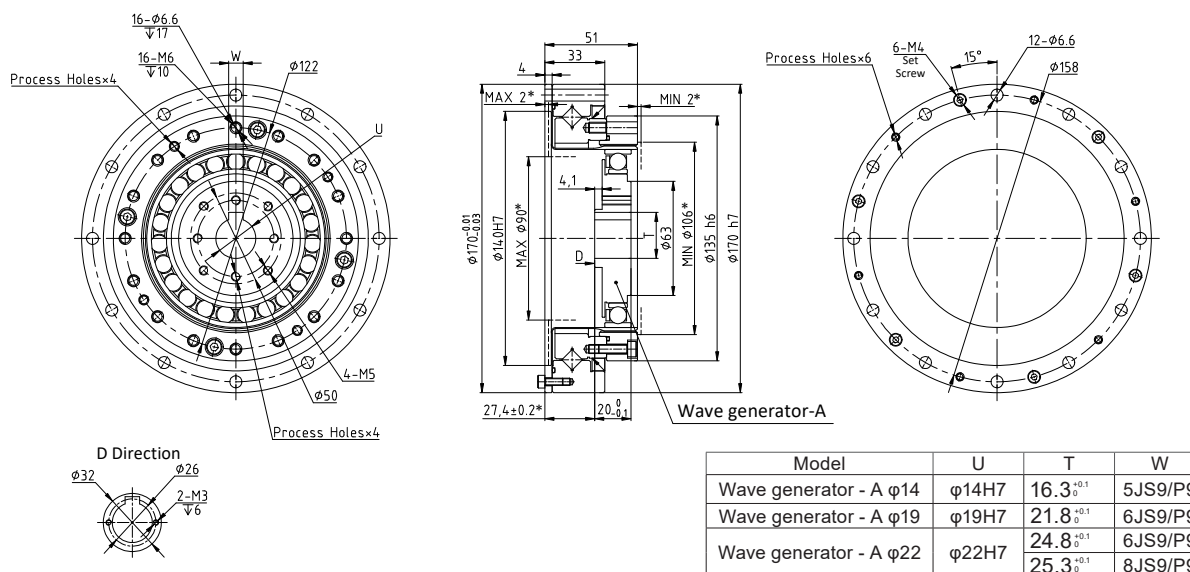


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
32	50	99	10	281	29	140	14	497	51	4800	3500	≤20	2.54	15000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	178	18	484	49	281	29	892	91					15000
40	50	178	18	523	53	255	26	892	91	4000	3000	≤20	4.4	10000
	80	268	27	675	69	369	38	1270	130					15000
	100	345	35	738	75	484	49	1400	143					15000
	120	382	39	802	82	586	60	1530	156					15000
	160	382	39	841	86	586	60	1530	156					15000

OUTLINE DRAWING

FHG-45-XX-U-I

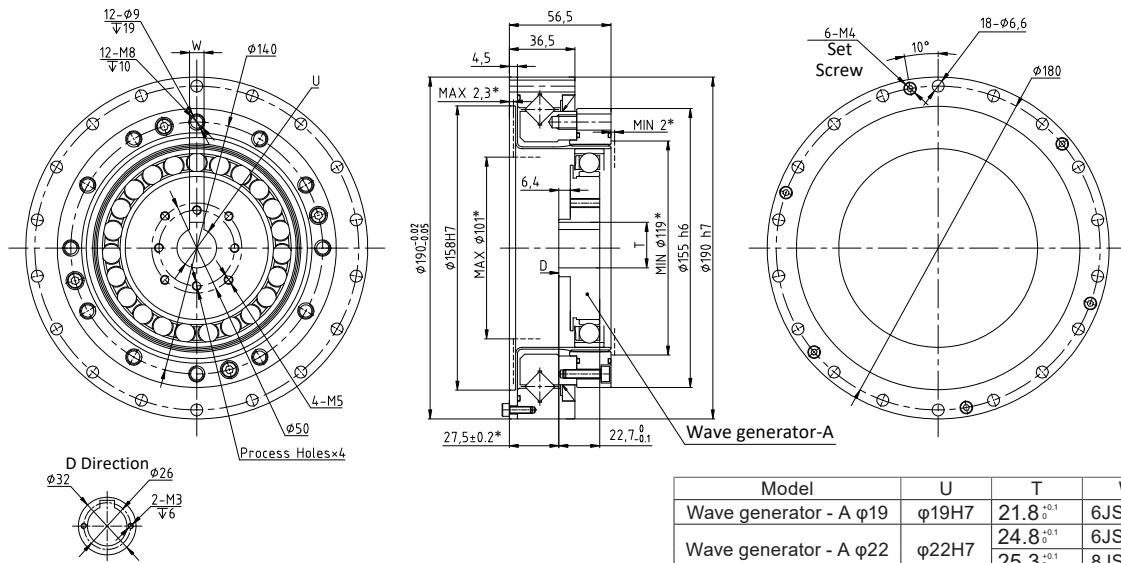


FHG-50-XX-U-I

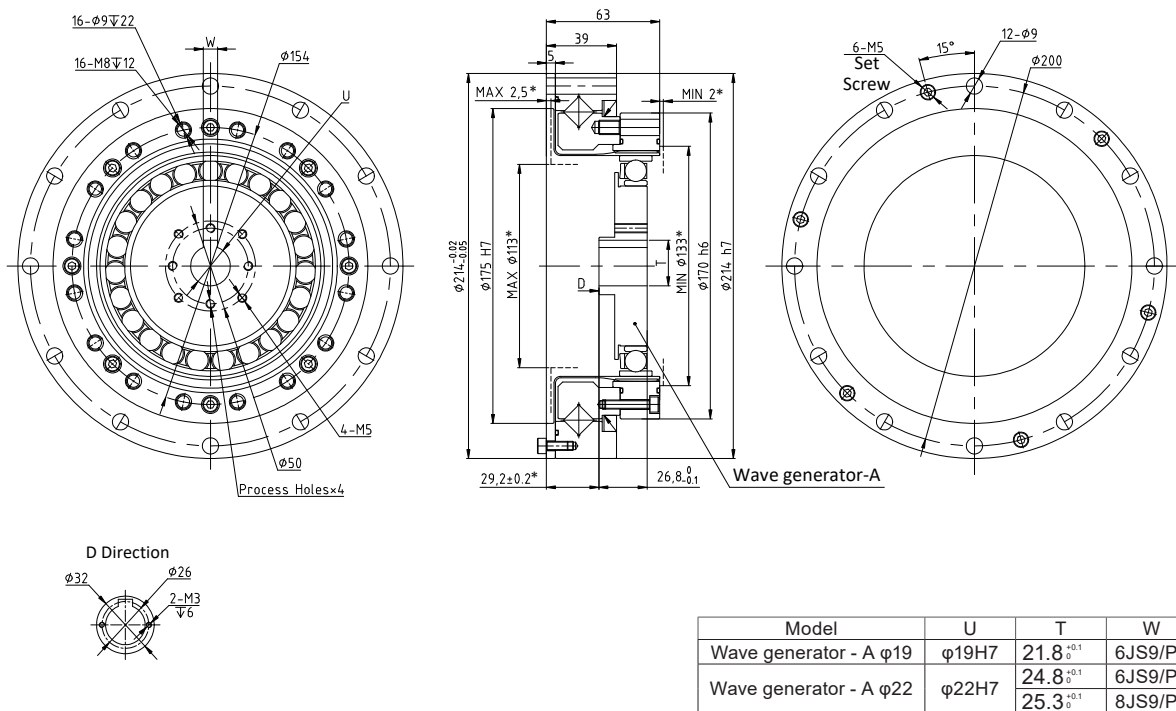

Model	Reduction ratio	Rated t6.5		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
45	80	407	41	918	94	507	52	1651	168	3800	3000	≤20	6.5	15000
	100	459	47	982	100	650	66	2041	208					15000
	120	523	53	1070	109	806	82	2288	233					15000
50	80	484	49	1223	125	675	69	2418	247	3500	2500	≤20	9.6	15000
	100	611	62	1247	130	866	88	2678	273					15000
	120	688	70	1404	143	1057	108	2678	273					15000


OUTLINE DRAWING

FHG-14-XX-U-II

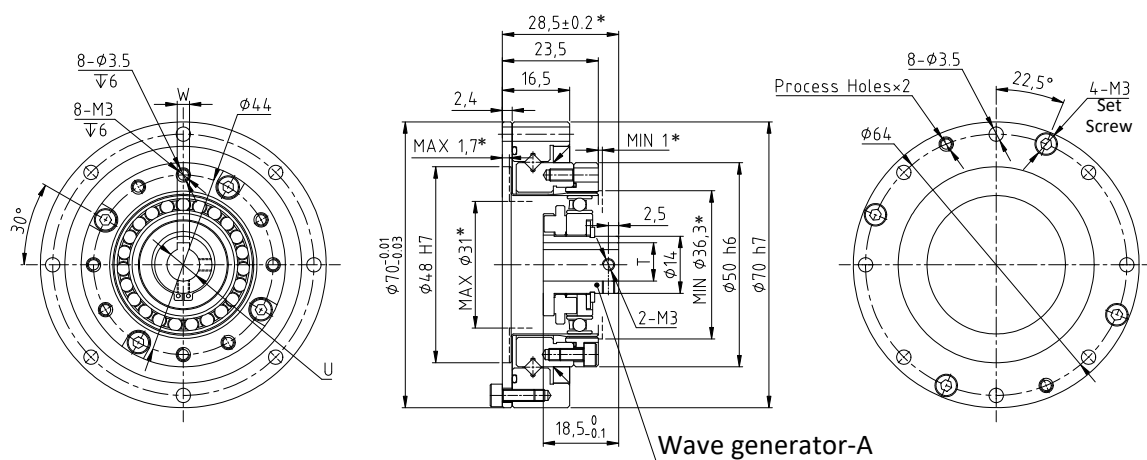

Model	U	T	W
Wave generator - A φ6	φ6H7		
Wave generator - A φ6	φ6H7	7 ^{+0.1} ₀	2JS9/P9
Wave generator - A φ8	φ8H7	9.4 ^{+0.1} ₀	3JS9/P9

FHG-17-XX-U-II

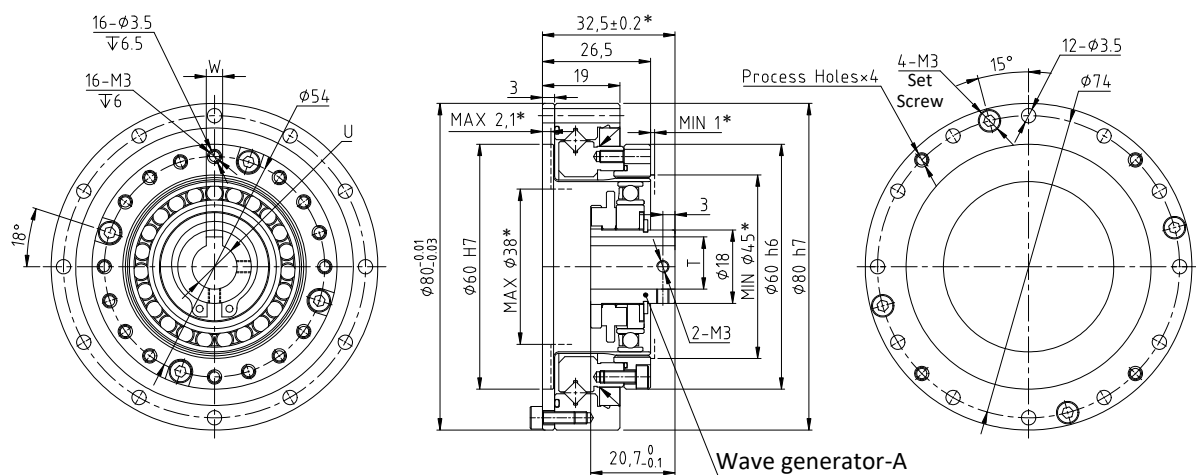

Model	U	T	W
Wave generator - A φ8	φ8H7		
Wave generator - A φ8	φ8H7	9.4 ^{+0.1} ₀	3JS9/P9
Wave generator - A φ11	φ11H7	12.8 ^{+0.1} ₀	4JS9/P9

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
14	50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤20	0.4	10000
	80	10	1	30	3.1	14	1.4	61	6.2					15000
	100	10	1	36	3.7	14	1.4	70	7.2					15000
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤20	0.54	10000
	80	29	2.9	56	5.7	35	3.6	113	12					15000
	100	31	3.2	70	7.2	51	5.2	143	15					15000
	120	31	3.2	70	7.2	51	5.2	112	11					15000

FHG-14-XX-U-II
FHG-17-XX-U-II


Model	U	T	W
Wave generator - A $\varnothing 8$	$\varnothing 8H7$	$9.4^{+0.1}_{-0}$	3JS9/P9
Wave generator - A $\varnothing 11$	$\varnothing 11H7$	12.8^{+0}_{-0}	4JS9/P9
Wave generator - A $\varnothing 14$	$\varnothing 14H7$	$16.3^{+0.1}_{-0}$	5JS9/P9

[illegible]


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤20	0.72	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤20	1.22	10000
	80	82	8.4	178	18	113	12	332	34					15000
	100	87	8.9	204	21	140	14	369	38					15000
	120	87	8.9	217	22	140	14	395	40					15000
	160	87	8.9	229	23	140	14	408	42					15000

OUTLINE DRAWING

FHG-32-XX-U-II

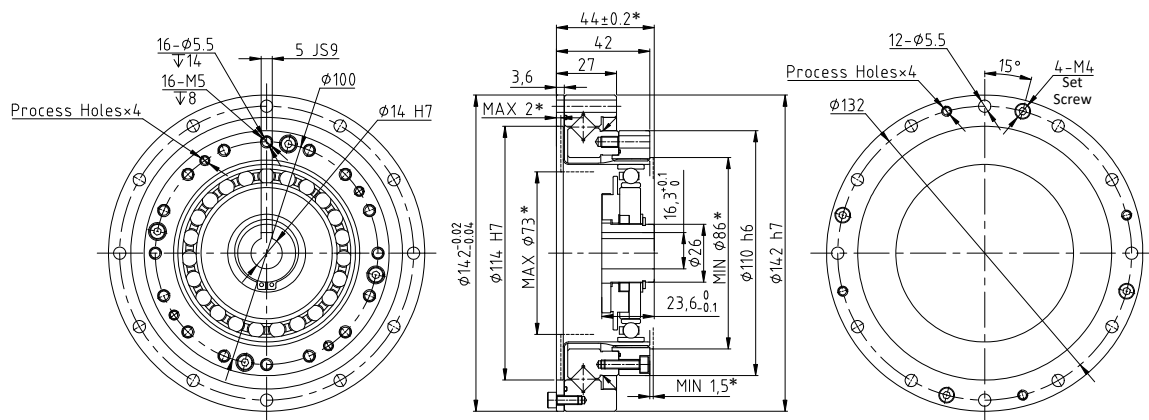


FHG-14-XX-U-III

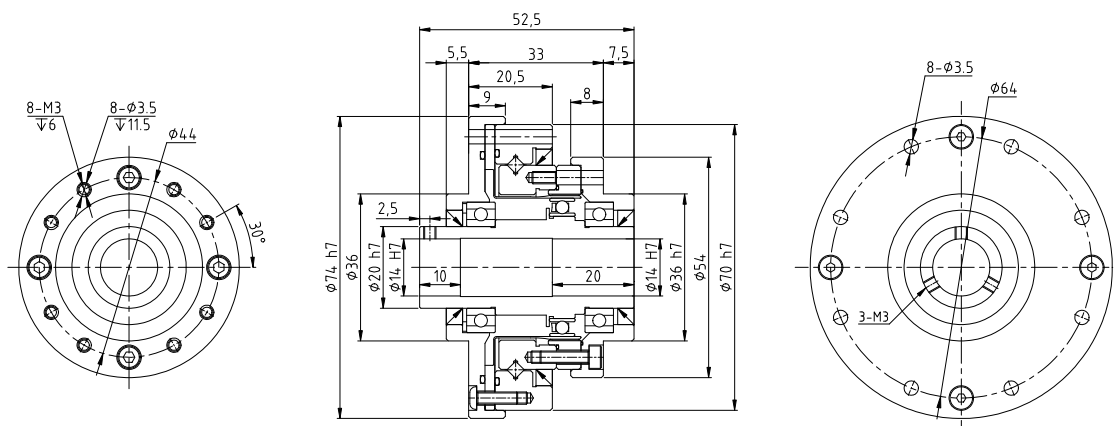


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
32	50	99	10	281	29	140	14	497	51	4800	3500	≤20	2.54	15000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	178	18	484	49	281	29	892	91					15000
14	50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤20	0.7	10000
	80	10	1	30	3.1	14	1.4	61	6.2					15000
	100	10	1	36	3.7	14	1.4	70	7.2					15000

OUTLINE DRAWING

FHG-14-XX-U-III-DL

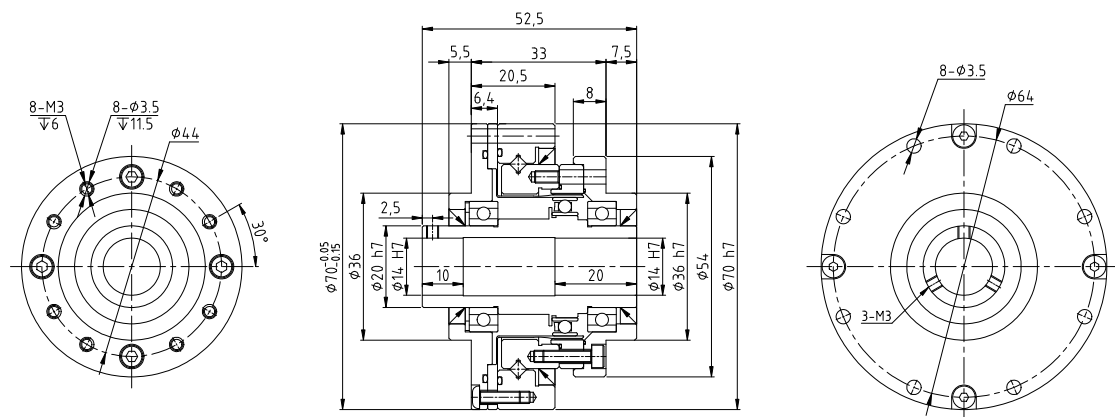


FHG-17-XX-U-III

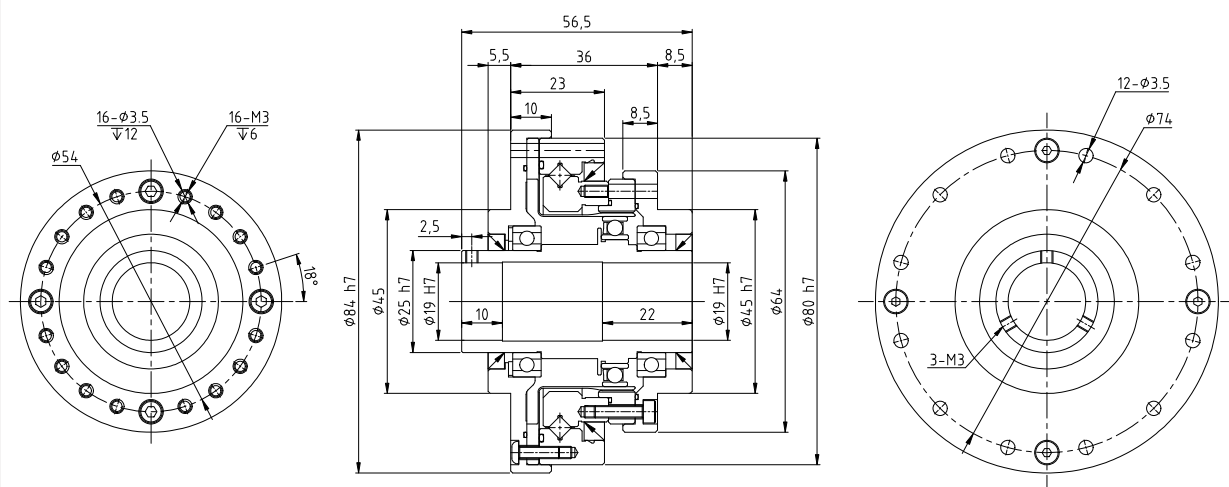


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
14	50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤20	0.7	10000
	80	10	1	30	3.1	14	1.4	61	6.2					15000
	100	10	1	36	3.7	14	1.4	70	7.2					15000
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤20	0.99	10000
	80	29	2.9	56	5.7	35	3.6	113	12					15000
	100	31	3.2	70	7.2	51	5.2	143	15					15000
	120	31	3.2	70	7.2	51	5.2	112	11					15000

OUTLINE DRAWING

FHG-17-XX-U-III-DL

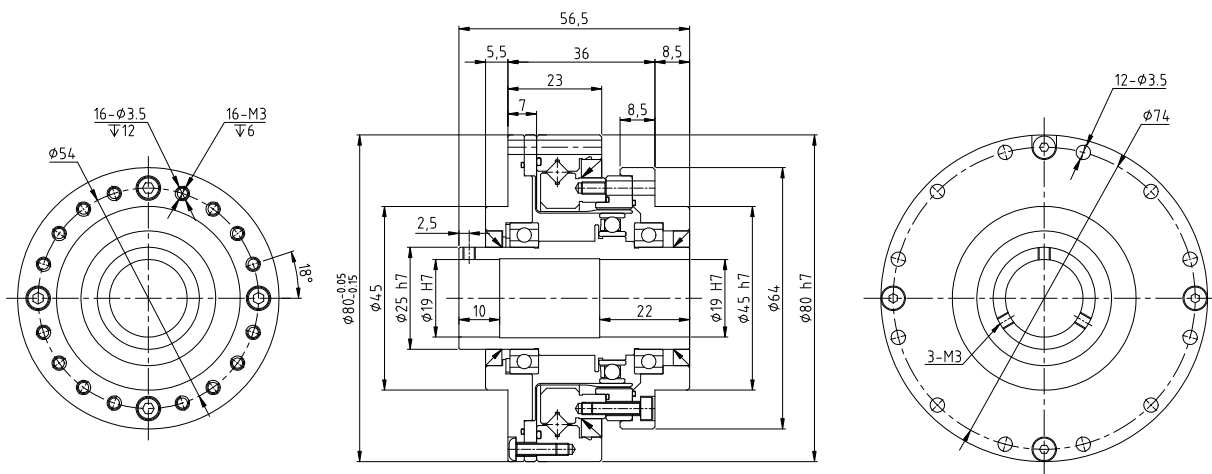

FHG-20-XX-U-III

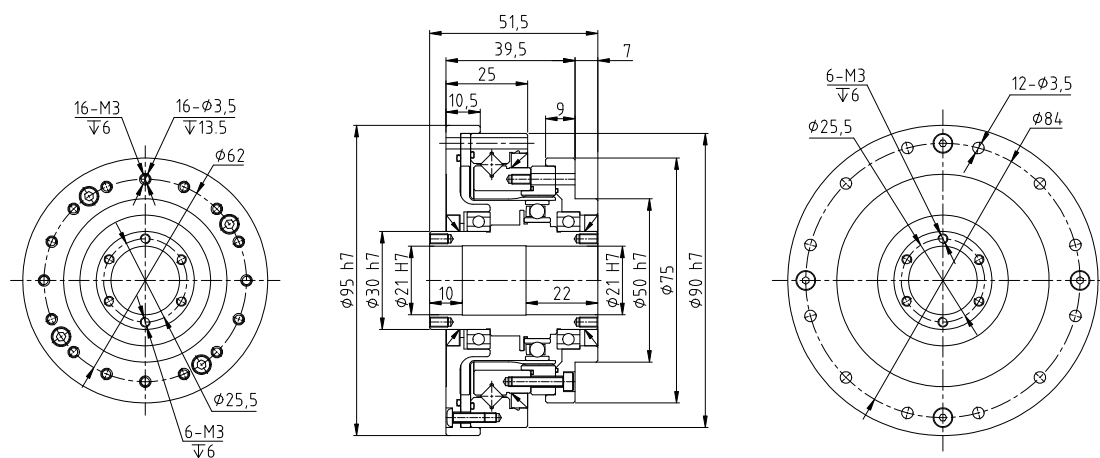


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤ 20	0.99	10000
	80	29	2.9	56	5.7	35	3.6	113	12					15000
	100	31	3.2	70	7.2	51	5.2	143	15					15000
	120	31	3.2	70	7.2	51	5.2	112	11					15000
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤ 20	1.32	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000


FHG-17-XX-U-III-DL
FHG-20-XX-U-III

OUTLINE DRAWING

FHG-32-XX-U-III

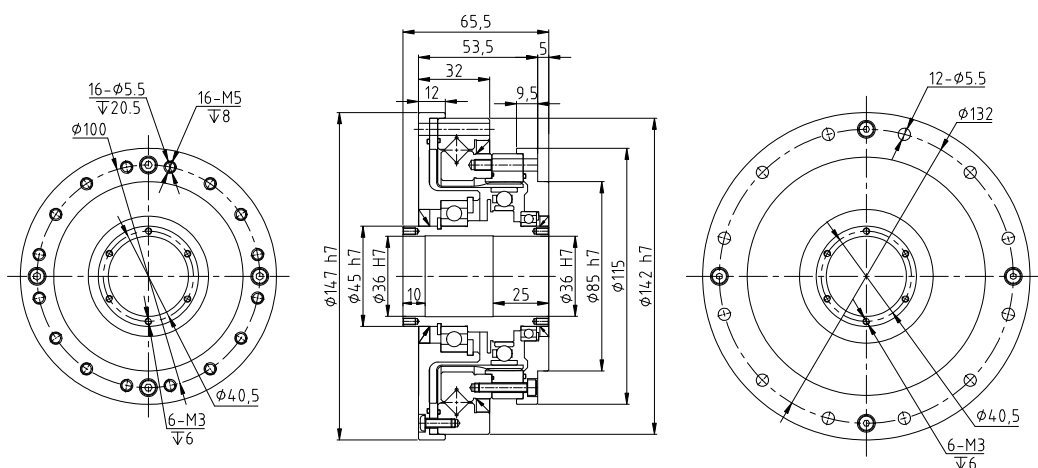


FHG-40-XX-U-III

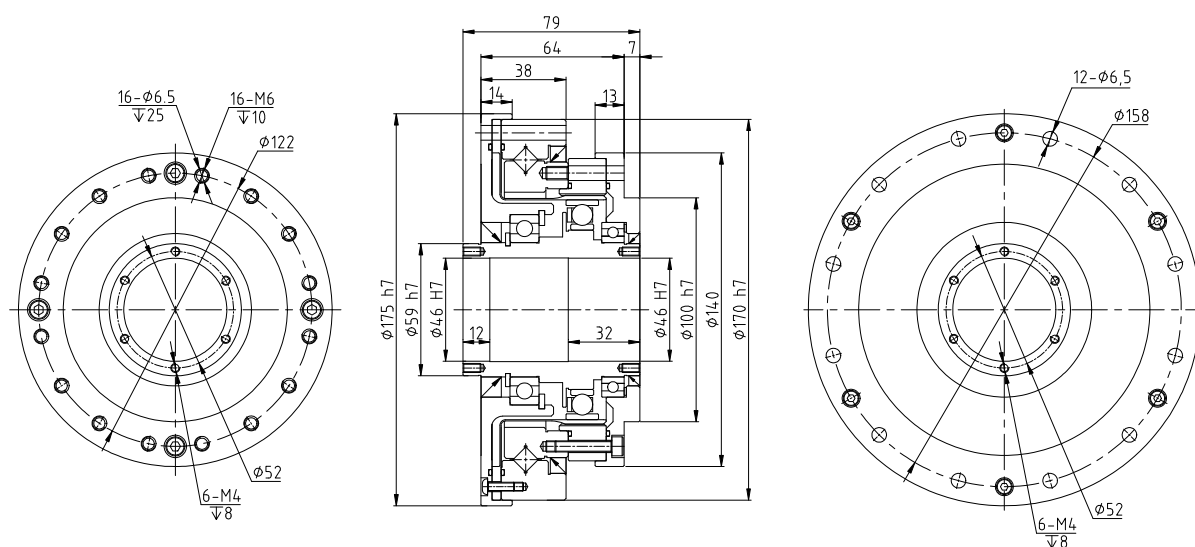


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
32	50	99	10	281	29	140	14	497	51	4800	3500	≤20	4.2	15000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	178	18	484	49	281	29	892	91					15000
40	50	178	18	523	53	255	26	892	91	4000	3500	≤20	7.2	10000
	80	268	27	675	69	369	38	1270	130					15000
	100	345	35	738	75	484	49	1400	143					15000
	120	382	39	802	82	586	60	1530	156					15000
	160	382	39	841	86	586	60	1530	156					15000

OUTLINE DRAWING

FHG-45-XX-U-III

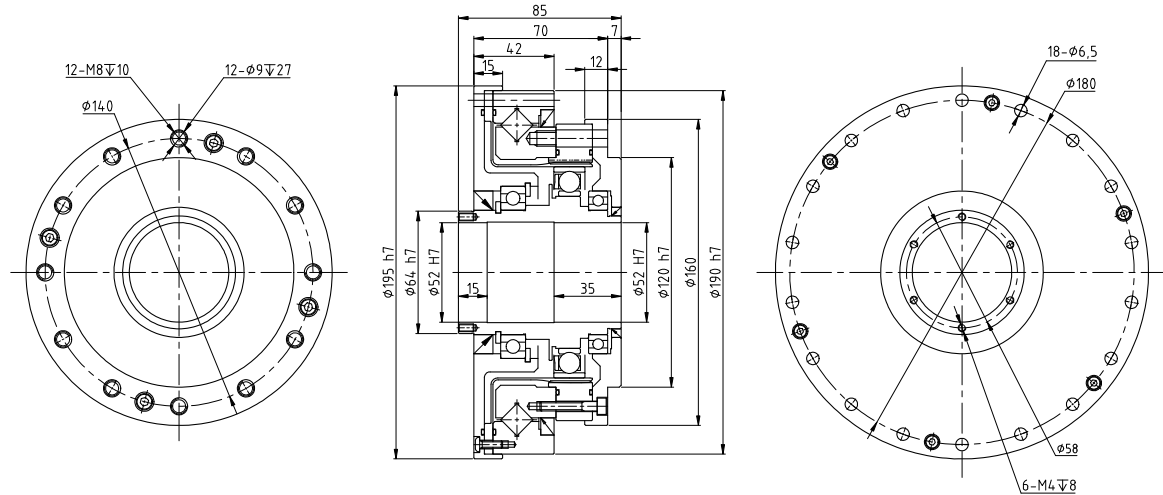

FHG-50-XX-U-III

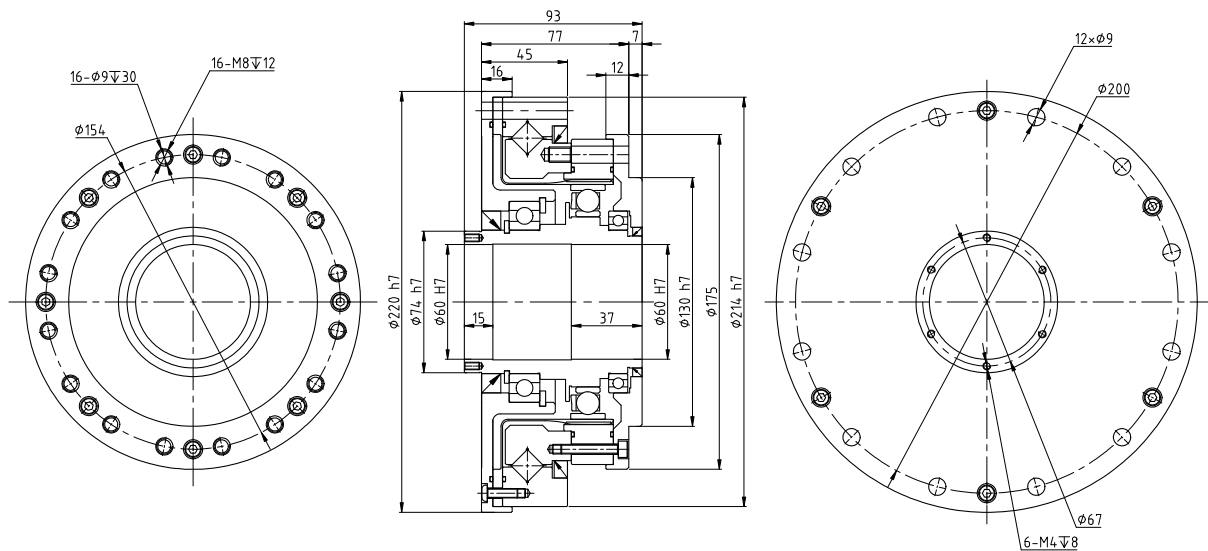


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
45	80	407	41	918	94	507	52	1651	168	3800	3500	≤ 20	6.5	15000
	100	459	47	982	100	650	66	2041	208					15000
	120	523	53	1070	109	806	82	2288	233					15000
50	80	484	49	1223	125	675	69	2418	247	3500	3500	≤ 20	14.5	15000
	100	611	62	1247	130	866	88	2678	273					15000
	120	688	70	1404	143	1057	108	2678	273					15000


OUTLINE DRAWING

FHG-14-XX-U-IV

with keyway

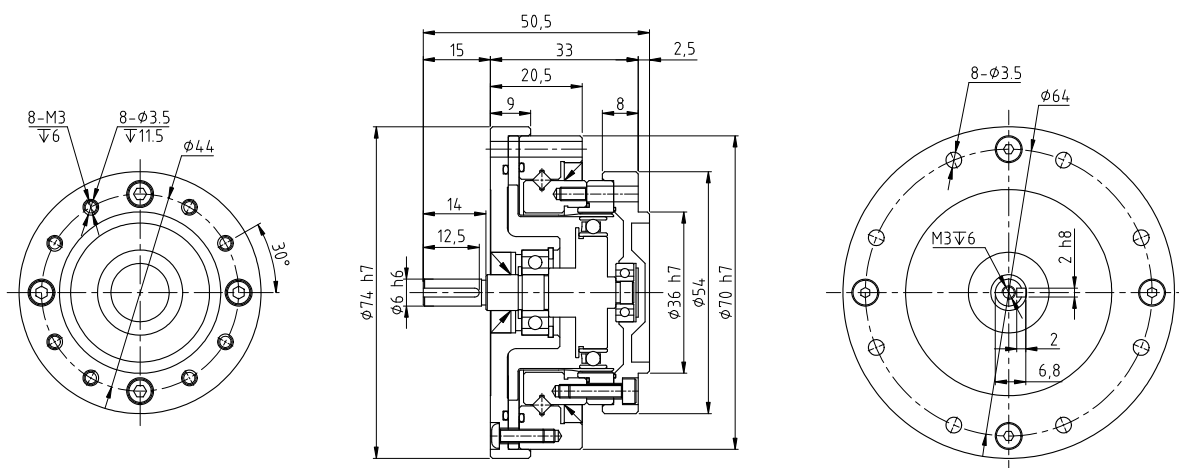


without keyway

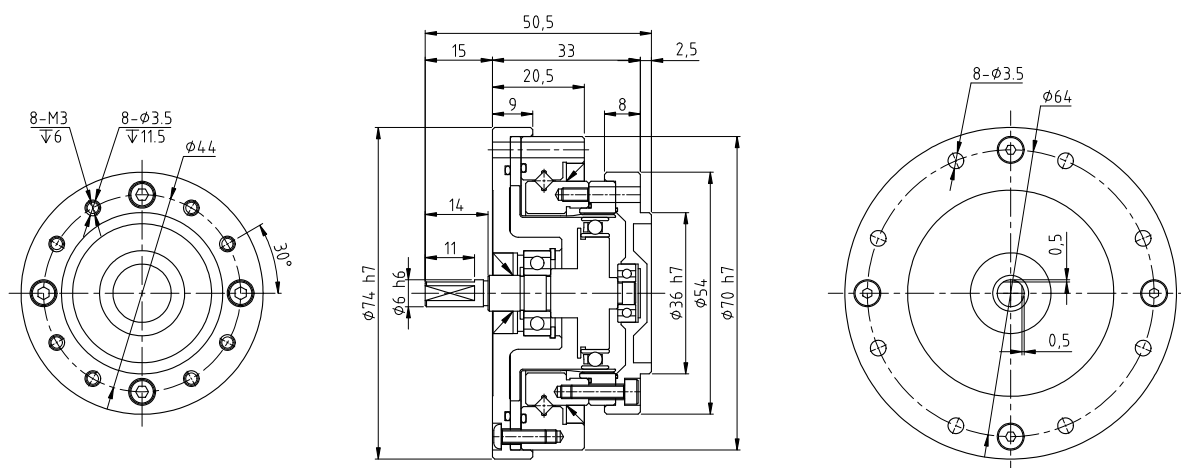

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
14	50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤20	0.66	10000
	80	10	1	30	3.1	14	1.4	61	6.2					15000
	100	10	1	36	3.7	14	1.4	70	7.2					15000

FHG-14-XX-U-IV


FHG-17-XX-U-IV




Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤20	0.9	10000
	80	29	2.9	56	5.7	35	3.6	113	12					15000
	100	31	3.2	70	7.2	51	5.2	143	15					15000
	120	31	3.2	70	7.2	51	5.2	112	11					15000

OUTLINE DRAWING

FHG-20-XX-U-IV

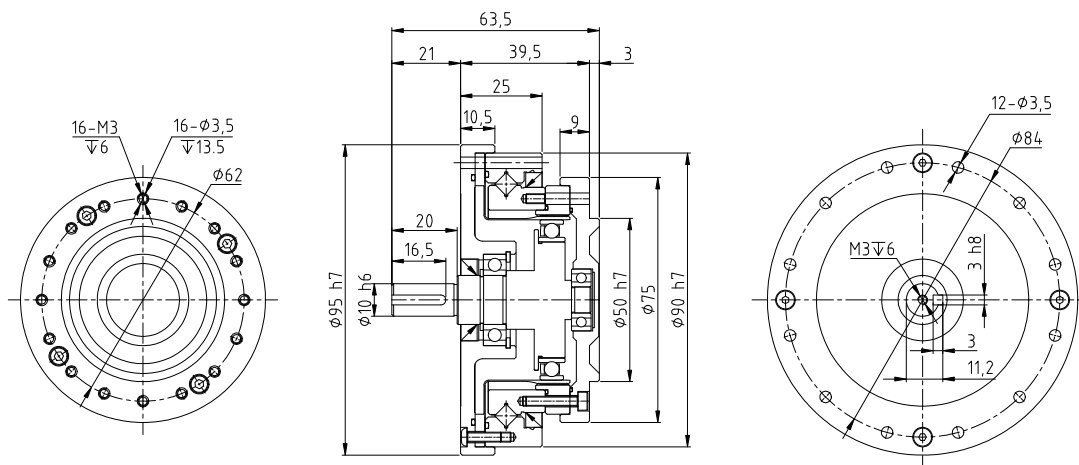

FHG-25-XX-U-IV

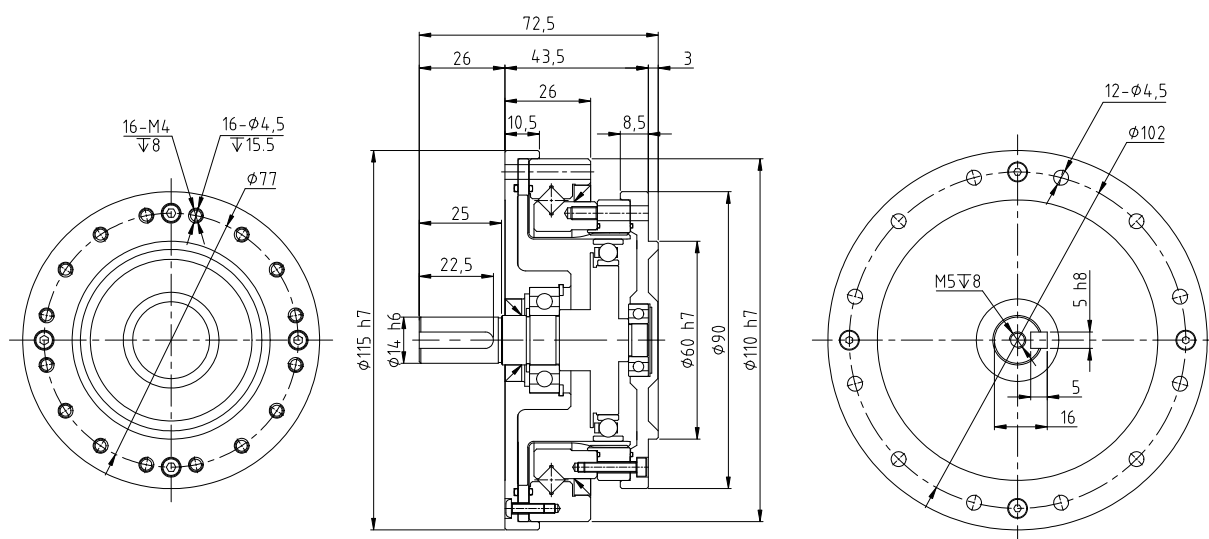


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤20	1.29	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤20	1.99	10000
	80	82	8.4	178	18	113	12	332	34					15000
	100	87	8.9	204	21	140	14	369	38					15000
	120	87	8.9	217	22	140	14	395	40					15000
	160	87	8.9	229	23	140	14	408	42					15000


FHG-20-XX-U-IV
FHG-25-XX-U-IV

OUTLINE DRAWING

FHG-32-XX-U-IV

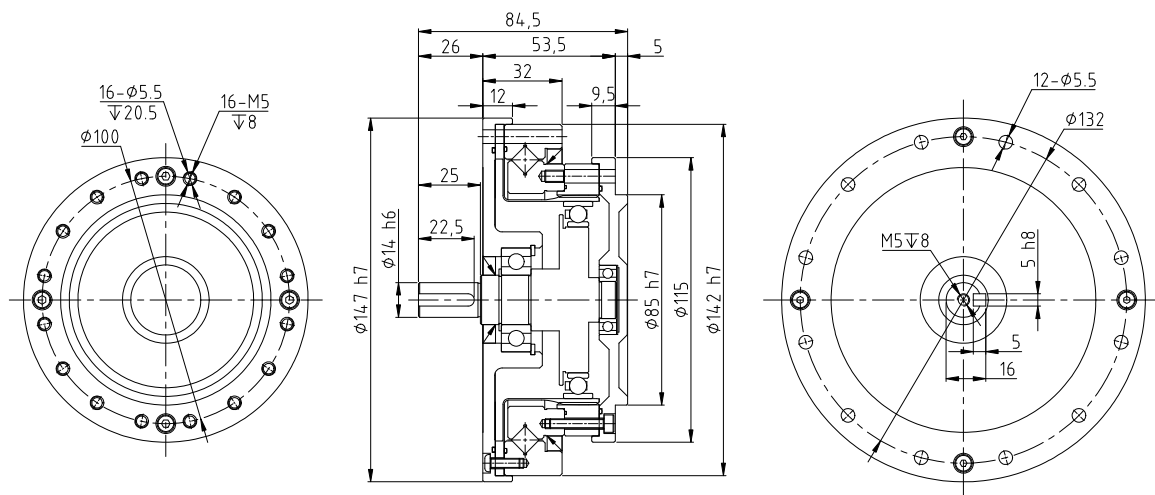


FHG-40-XX-U-IV

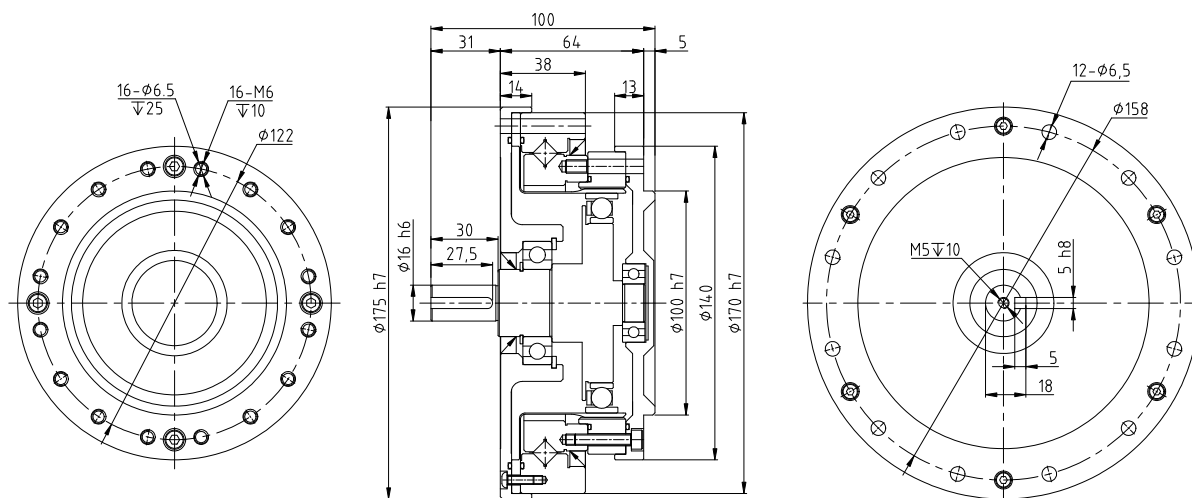


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N-m	Kgf-m	N-m	Kgf-m	N-m	Kgf-m	N-m	Kgf-m	r/min	r/min	Arc Sec	kg	Hour
32	50	99	10	281	29	140	14	497	51	4800	3500	≤ 20	4	15000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	178	18	484	49	281	29	892	91					15000
40	50	178	18	523	53	255	26	892	91	4000	3500	≤ 20	7	10000
	80	268	27	675	69	369	38	1270	130					15000
	100	345	35	738	75	484	49	1400	143					15000
	120	382	39	802	82	586	60	1530	156					15000
	160	382	39	841	86	586	60	1530	156					15000

OUTLINE DRAWING

FHG-14-XX-U-V

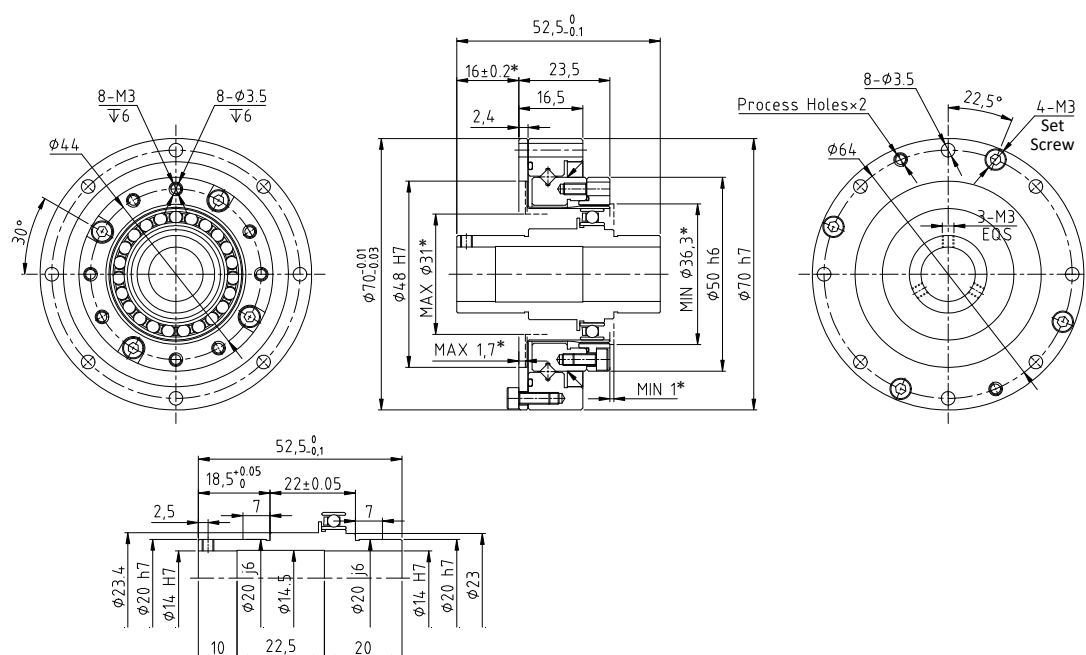

FHG-17-XX-U-V

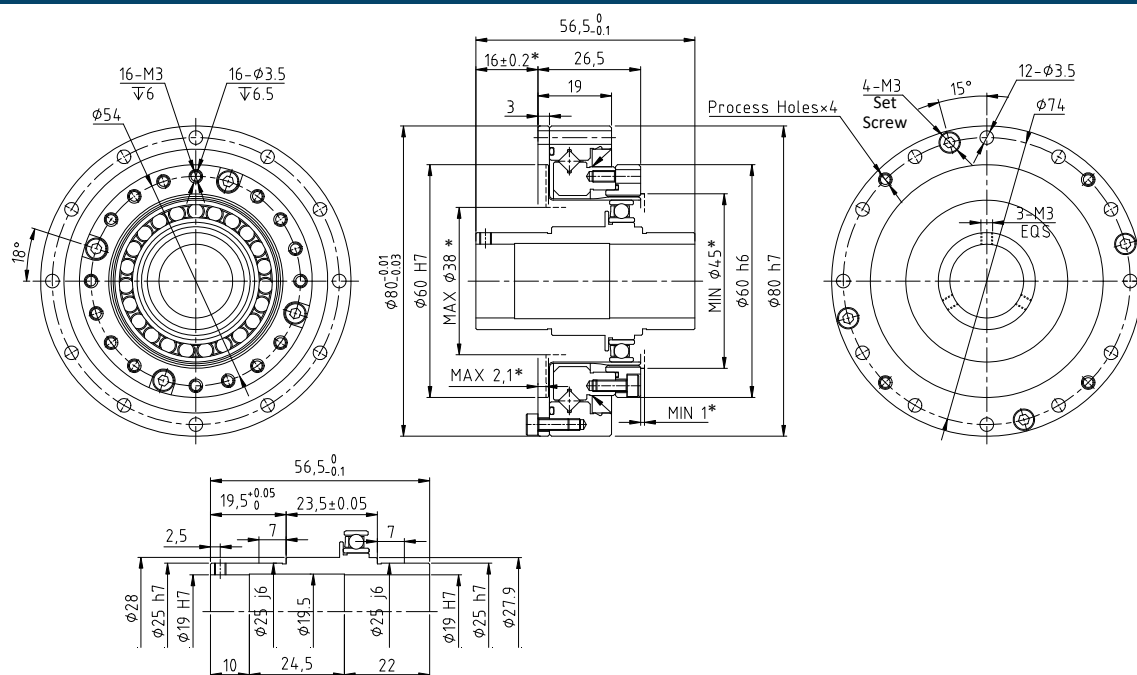


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
14	50	7	0.7	23	2.3	9	0.9	46	4.7	8500	3500	≤ 20	0.4	10000
	80	10	1	30	3.1	14	1.4	61	6.2					15000
	100	10	1	36	3.7	14	1.4	70	7.2					15000
17	50	21	2.1	44	4.5	34	3.4	91	9	7300	3500	≤ 20	0.62	10000
	80	29	2.9	56	5.7	35	3.6	113	12					15000
	100	31	3.2	70	7.2	51	5.2	143	15					15000
	120	31	3.2	70	7.2	51	5.2	112	11					15000


FHG-14-XX-U-V
FHG-17-XX-U-V

OUTLINE DRAWING

FHG-20-XX-U-V

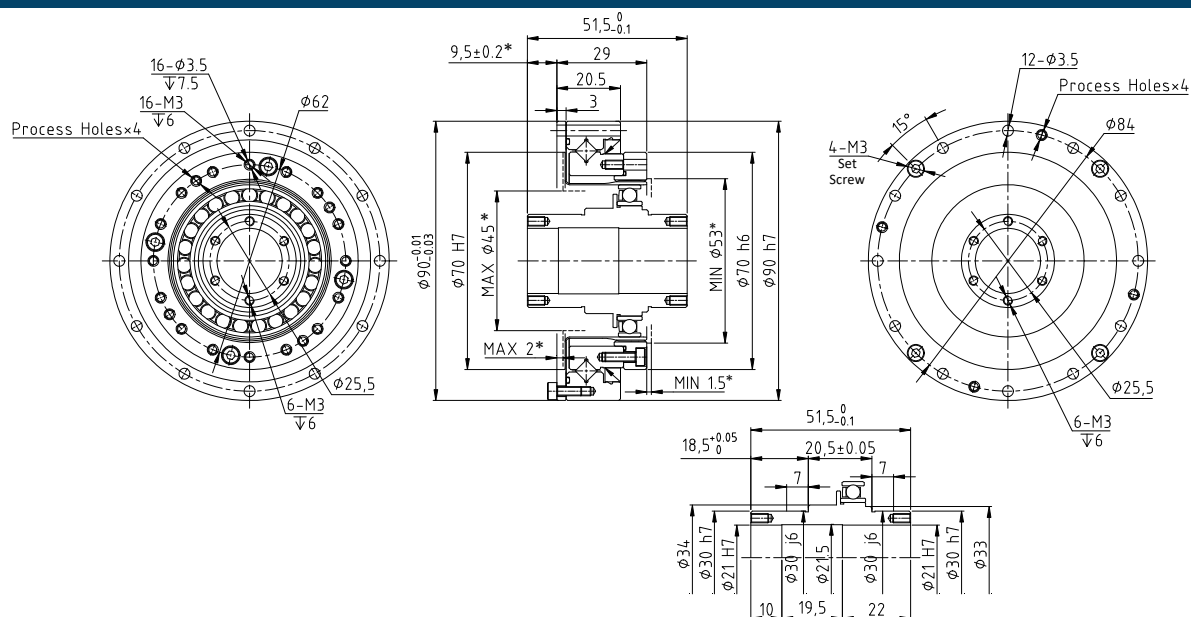


FHG-25-XX-U-V

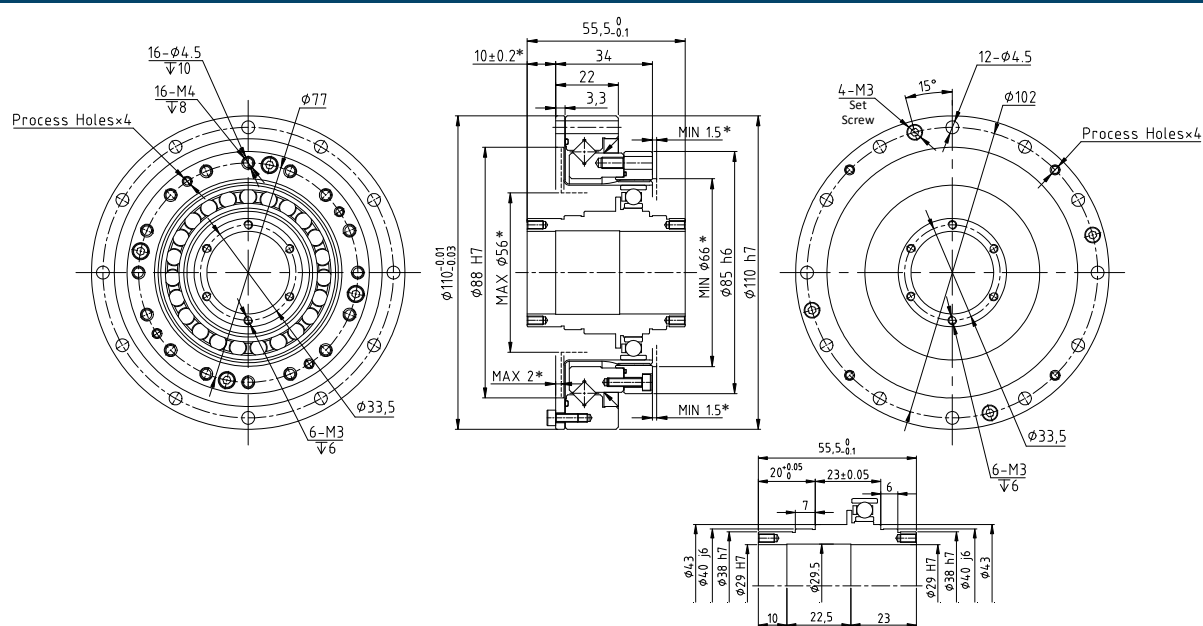


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
20	50	33	3.3	73	7.4	44	4.5	127	13	6500	3500	≤ 20	0.82	10000
	80	44	4.5	96	9.8	61	6.2	165	17					15000
	100	52	5.3	107	10.9	64	6.5	191	20					15000
	120	52	5.3	113	11.5	64	6.5	191	20					15000
	160	52	5.3	120	12.2	64	6.5	191	20					15000
25	50	51	5.2	127	13	72	7.3	242	25	5600	3500	≤ 20	1.4	10000
	80	82	8.4	178	18	113	12	332	34					15000
	100	87	8.9	204	21	140	14	369	38					15000
	120	87	8.9	217	22	140	14	395	40					15000
	160	87	8.9	229	23	140	14	408	42					15000

OUTLINE DRAWING

FHG-32-XX-U-V

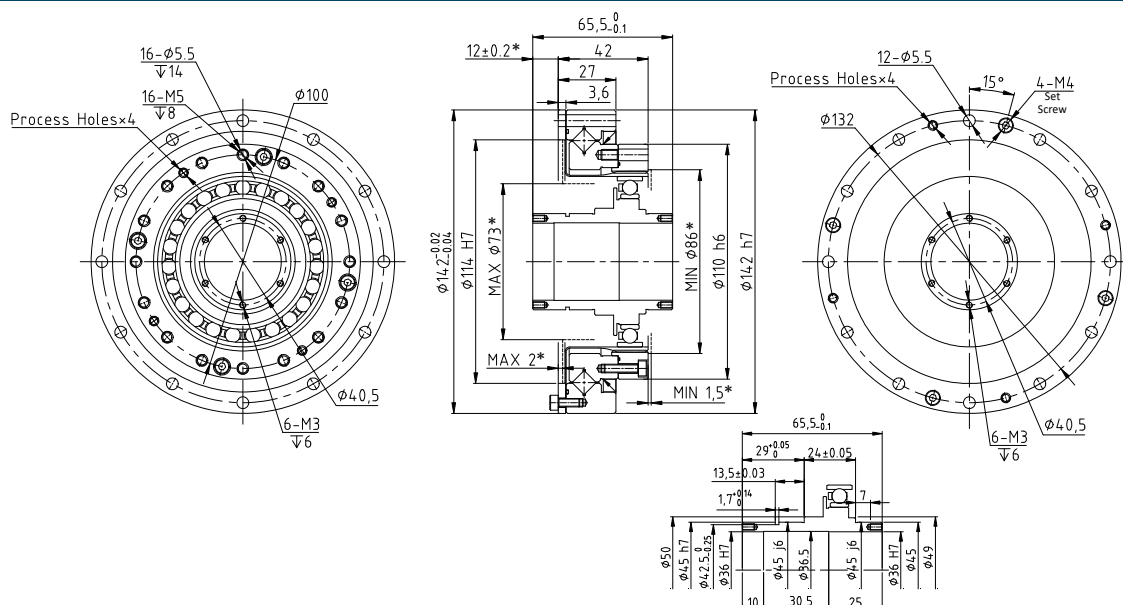

FHG-40-XX-U-V

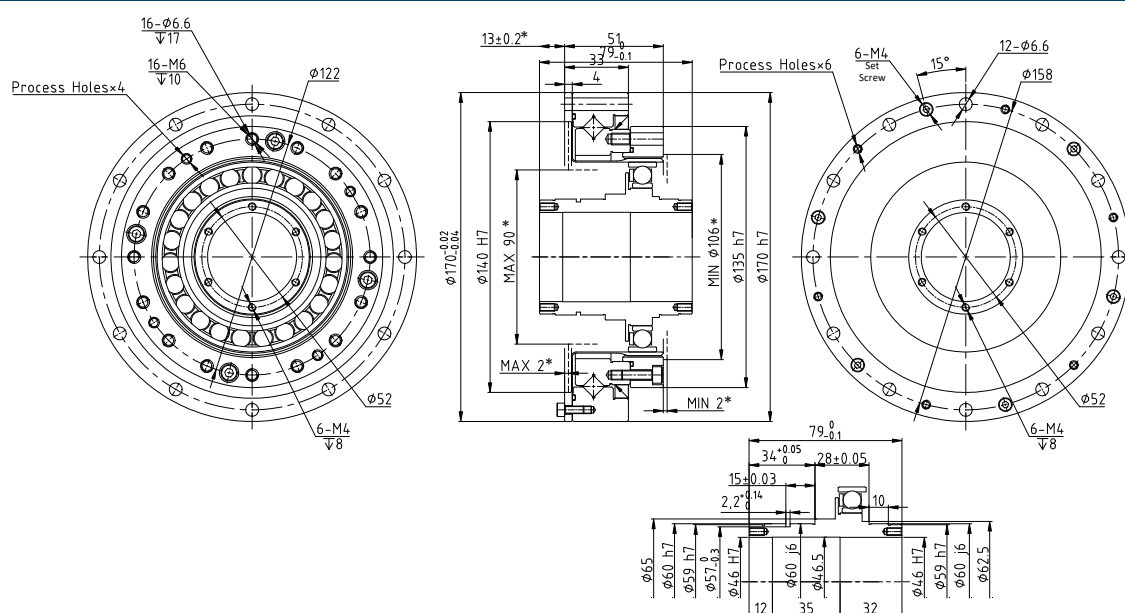

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
32	50	99	10	281	29	140	14	497	51	4800	3500	≤ 20	2.7	15000
	80	153	16	395	40	217	22	738	75					15000
	100	178	18	433	44	281	29	841	86					15000
	120	178	18	459	47	281	29	892	91					15000
	160	178	18	484	49	281	29	892	91					15000
40	50	178	18	523	53	255	26	892	91	4000	3500	≤ 20	5.4	10000
	80	268	27	675	69	369	38	1270	130					15000
	100	345	35	738	75	484	49	1400	143					15000
	120	382	39	802	82	586	60	1530	156					15000
	160	382	39	841	86	586	60	1530	156					15000

FHG-32-XX-U-V
FHG-40-XX-U-V

INTRODUCTION OF FHD



FHD-I



FHD-III

FHD



■ Introduction

FHD flexspline with flanging ultra short tube structure. Which can be used when circular spline fixed, and the flexspline as end output. It can also used to fix the flexspline, and the circular spline as end output. The axial length of FHD-I is shortened by 50%, FHD-III is shortened by 15% without changing product performance.

■ Application

- Humanoid robot
- Semiconductor manufacturing equipment
- FPD manufacturing equipment
- Industrial robot
- Space equipment

■ Unit type structure of FHD

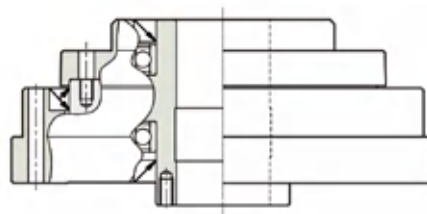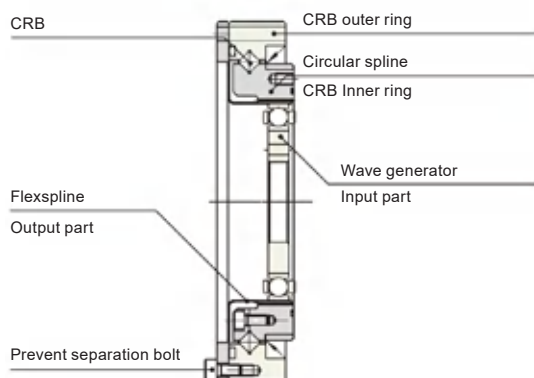

TECHNICAL DATA OF FHD

Rating table of FHD

Model	Reduction ratio	Rated torque at input 2000r/min	Permissible peak torque at start/stop	Permissible max. value of ave.load torque	Instantaneous permissible max. torque	Permissible max. input rotational speed Grease lubricant	Permissible ave. input rotational speed Grease lubricant	Backlash	Weight	Design life
		N·m	N·m	N·m	N·m	r/min	r/min			
8	50	1.25	2.3	1.6	4.6	8500	3500	≤40	0.06	8000
	100	1.65	3.3	2.3	6.3					8000
11	50	2.4	5.8	3.5	11.5	8000	3500	≤30	0.13	8000
	100	3.5	7.7	6.2	17.5					8000
14	50	3.7	12	4.8	23	8500	3500	≤20	FHD-I:0.34 FHD-III:0.64	9000
	80	5.4	16	7.7	35					10000
	100	5.4	19	7.7	35					10000
17	50	11	23	18	48	7300	3500	≤20	FHD-I:0.42 FHD-III:0.87	9000
	80	15	29	19	61					10000
	100	16	37	27	71					10000
20	50	17	39	24	69	6500	3500	≤20	FHD-I:0.54 FHD-III:1.14	9000
	80	24	51	33	89					10000
	100	28	57	34	95					10000
25	50	27	69	38	127	5600	3500	≤20	FHD-I:0.95 FHD-III:1.75	9000
	80	44	96	60	179					10000
	100	47	110	75	184					10000
32	50	53	151	75	268	4800	3500	≤20	FHD-I:1.90 FHD-III:3.56	9000
	80	83	213	117	398					10000
	100	96	233	151	420					10000

Transmission accuracy

unit: arc min

Type Reduction ratio	8	11	14	17	20	25	32
50	2	2	1.5	1.5	1	1	1
above 50	2	2	1.5	1.5	1	1	1

Hysteresis loss

unit: arc min


Type Reduction ratio	8	11	14	17	20	25	32
50	3.5	3	2.5	2	2	2	2
above 50	3	2.5	2	1	1	1	1

Torsional stiffness

Project		Type Unit	11	14	17	20	25	32	40
T1		Nm	0.29	0.8	2	3.9	7	14	29
T2		Nm	0.75	2	6.9	12	25	48	108
Reduction ratio 50	K1	× 10 ⁴ Nm/rad	0.037	0.19	0.29	0.67	1.1	2	4.7
	K2	× 10 ⁴ Nm/rad	0.051	0.23	0.37	0.88	1.3	2.7	6.1
	K3	× 10 ⁴ Nm/rad	0.071	0.27	0.47	1.2	2	3.7	8.4
Reduction ratio above 50	K1	× 10 ⁴ Nm/rad	0.073	0.23	0.4	0.84	1.3	2.7	6.1
	K2	× 10 ⁴ Nm/rad	0.077	0.26	0.44	0.94	1.7	3.7	7.8
	K3	× 10 ⁴ Nm/rad	0.1	0.37	0.61	1.3	2.5	4.7	11


OUTLINE DRAWING

FHD-8-XX-U-I

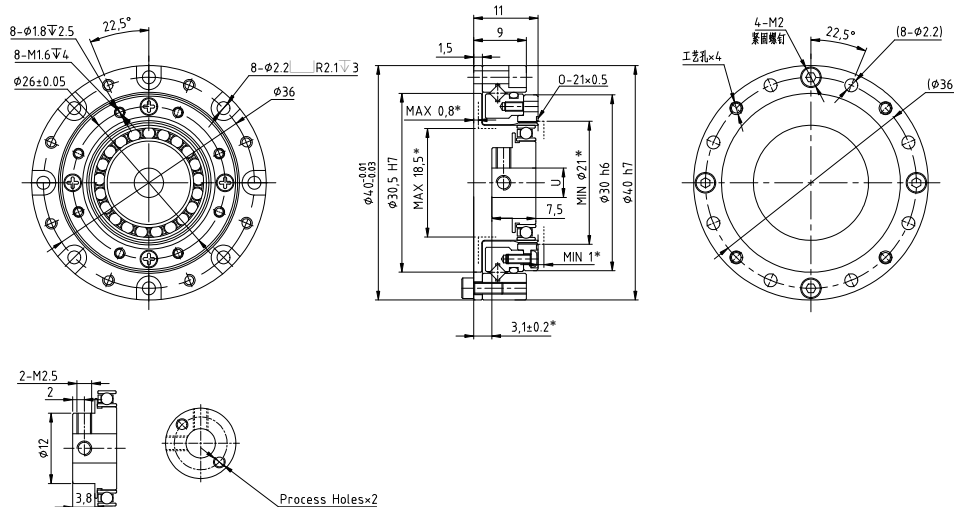

Model	U	T	W
Wave generator - A $\phi 5$	$\phi 5H7$		

FHD-11-XX-U-I

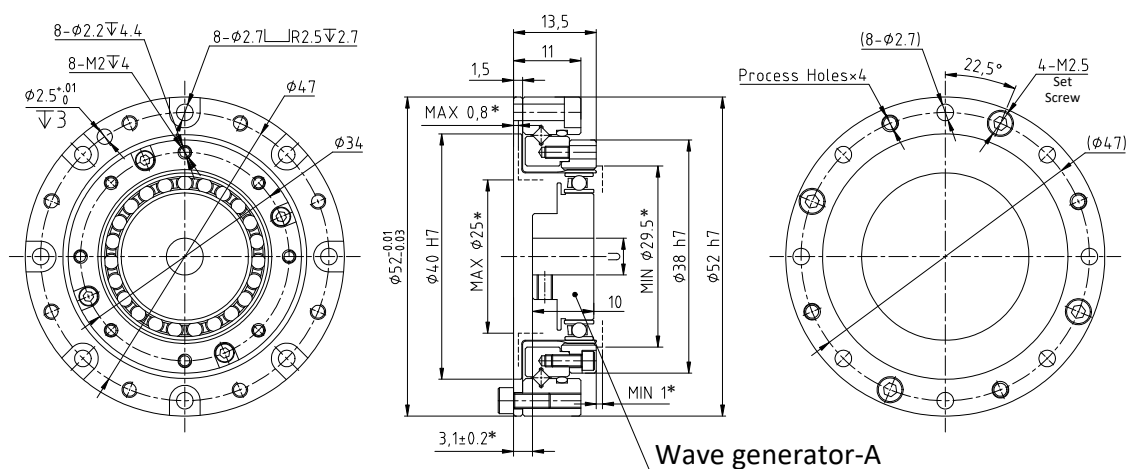


Wave generator-A

Model	U	T	W
Wave generator - A $\phi 5$	$\phi 5H7$		
Wave generator - A $\phi 6$	$\phi 6H7$		

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
8	50	1.25	0.13	2.3	0.23	1.6	0.16	4.6	0.47	8000	3500	≤ 40	0.06	8000
	100	1.65	0.17	3.3	0.34	2.3	0.23	6.3	0.64					8000
11	50	2.4	0.24	5.8	0.59	3.5	0.36	11.5	1.17	8000	3500	≤ 30	0.13	8000
	100	3.5	0.36	7.7	0.79	6.2	0.63	17.5	1.79					8000


OUTLINE DRAWING

FHD-14-XX-U-I

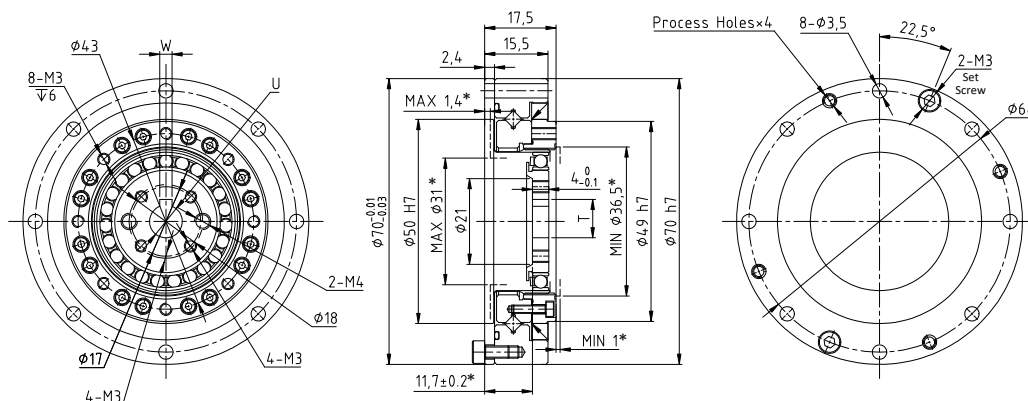

Model	U	T	W
Wave generator - A $\phi 6$	$\phi 6H7$	$7^{+0.1}_0$	2JS9/P9
Wave generator - A $\phi 8$	$\phi 6H7$	$9.4^{+0.1}_0$	3JS9/P9
Wave generator - A $\phi 11$	$\phi 8H7$		

FHD-17-XX-U-I

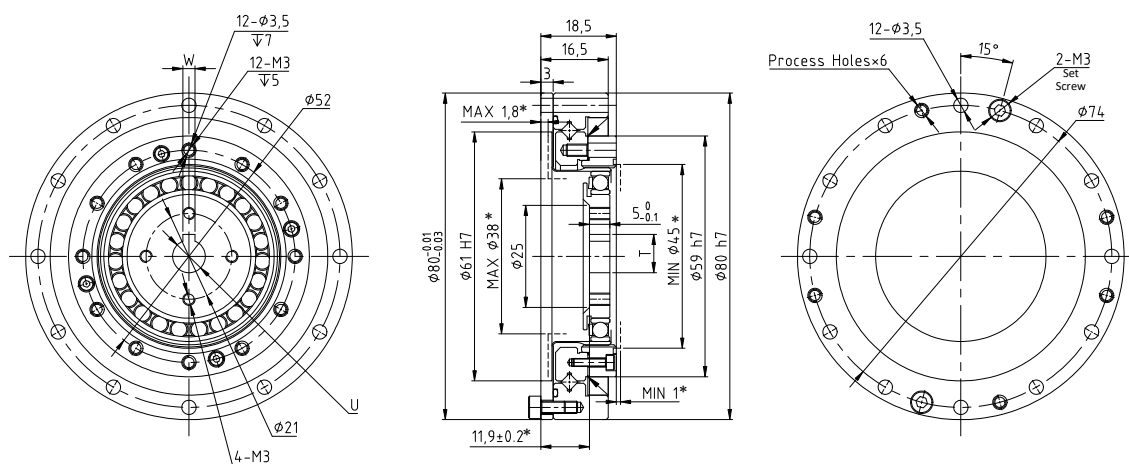


Model	U	T	W
Wave generator - A $\phi 6$	$\phi 6H7$	$7^{+0.1}_0$	2JS9/P9
Wave generator - A $\phi 8$	$\phi 8H7$	$9.4^{+0.1}_0$	3JS9/P9
Wave generator - A $\phi 11$	$\phi 11H7$		
Wave generator - A $\phi 15$	$\phi 15H7$		

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m					
14	50	3.7	0.38	12	1.2	4.8	0.49	24	2.4	8500	3500	≤20	0.34	9000
	80	5.4	0.55	16	1.6	7.7	0.79	35	3.6					10000
	100	5.4	0.55	19	1.9	7.7	0.79	35	3.6					10000
17	50	11	1.1	23	2.3	18	1.8	48	4.9	7300	3500	≤20	0.42	9000
	80	15	1.5	29	3	19	1.9	61	6.2					10000
	100	16	1.6	37	3.8	27	2.8	71	7.2					10000


FHD-14-XX-U-I
FHD-17-XX-U-I

OUTLINE DRAWING

FHD-20-XX-U-I

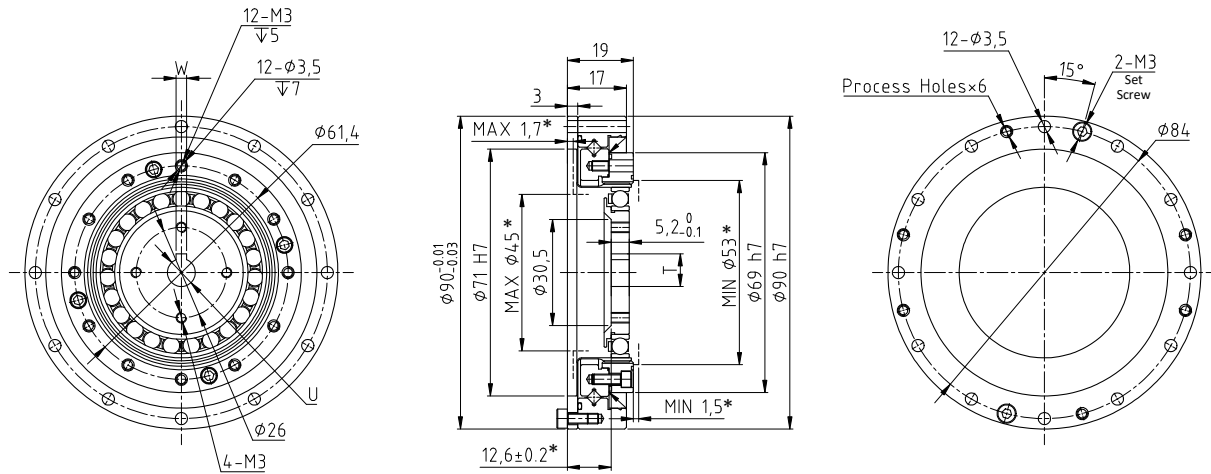


FHD-25-XX-U-I

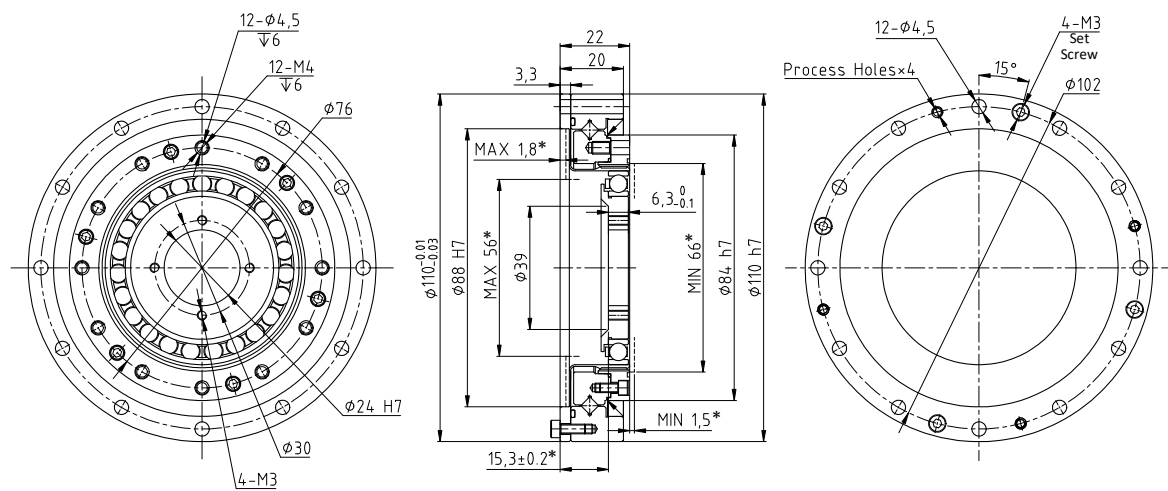


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
20	50	17	1.7	39	4	24	2.4	69	7	6500	3500	≤20	0.54	9000
	80	24	2.4	51	5.2	33	3.4	89	9.1					10000
	100	28	2.9	57	5.8	34	3.5	95	9.7					10000
25	50	27	2.8	69	7	38	3.9	127	13	5600	3500	≤20	0.95	9000
	80	44	4.5	96	9.8	60	6.1	179	18					10000
	100	47	4.8	110	11	75	7.6	184	19					10000

OUTLINE DRAWING

FHD-32-XX-U-I

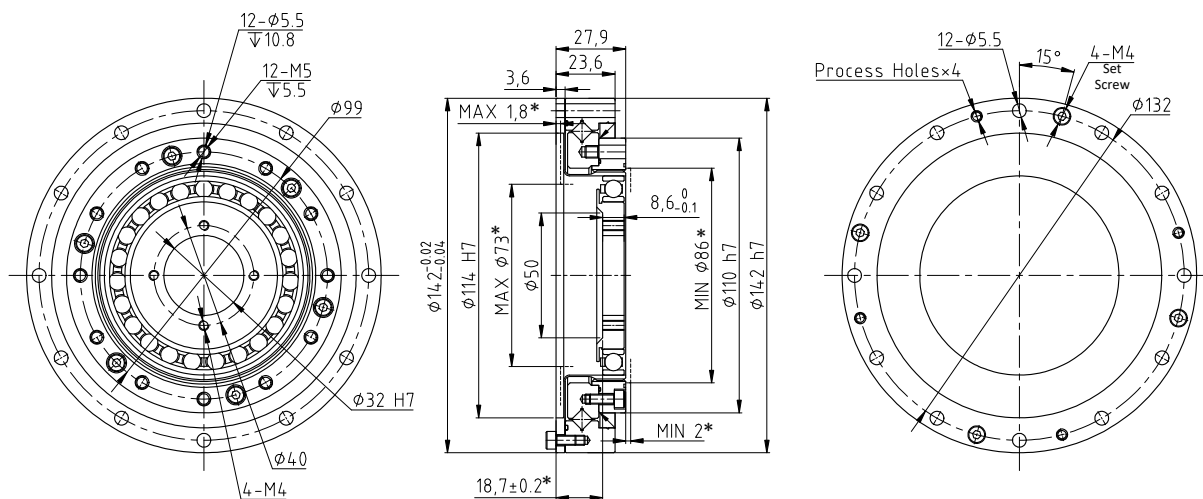

FHD-14-XX-U-III

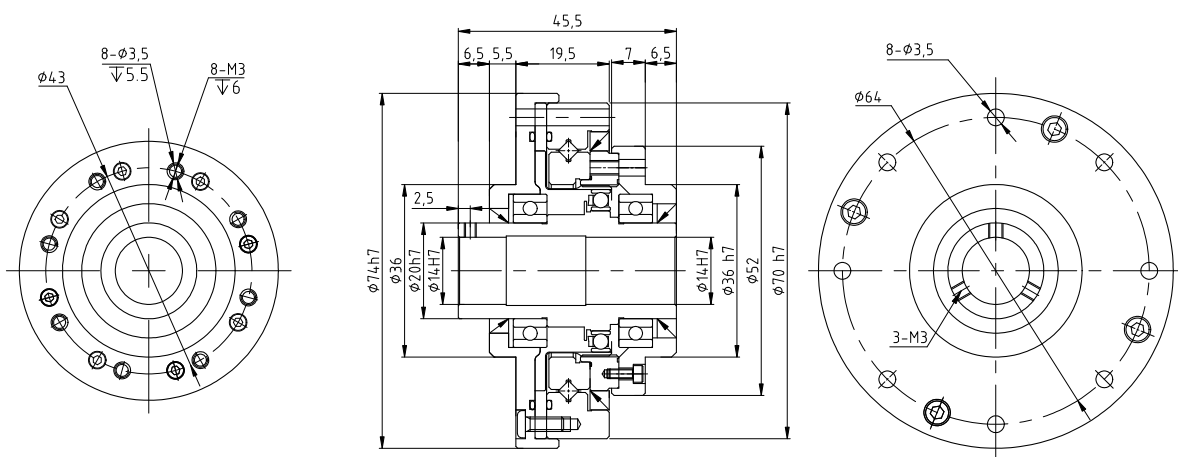


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave. load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
32	50	53	5.4	151	15	75	7.6	268	27	4800	3500	≤20	1.9	9000
	80	83	8.5	213	22	117	12	398	41					10000
	100	96	9.8	233	24	151	15	420	43					10000
14	50	3.7	0.38	12	1.2	4.8	0.49	24	2.4	8500	3500	≤20	0.64	9000
	80	5.4	0.55	16	1.6	7.7	0.79	35	3.6					10000
	100	5.4	0.55	19	1.9	7.7	0.79	35	3.6					10000


FHD-32-XX-U-I
FHD-14-XX-U-III

OUTLINE DRAWING

FHD-17-XX-U-III

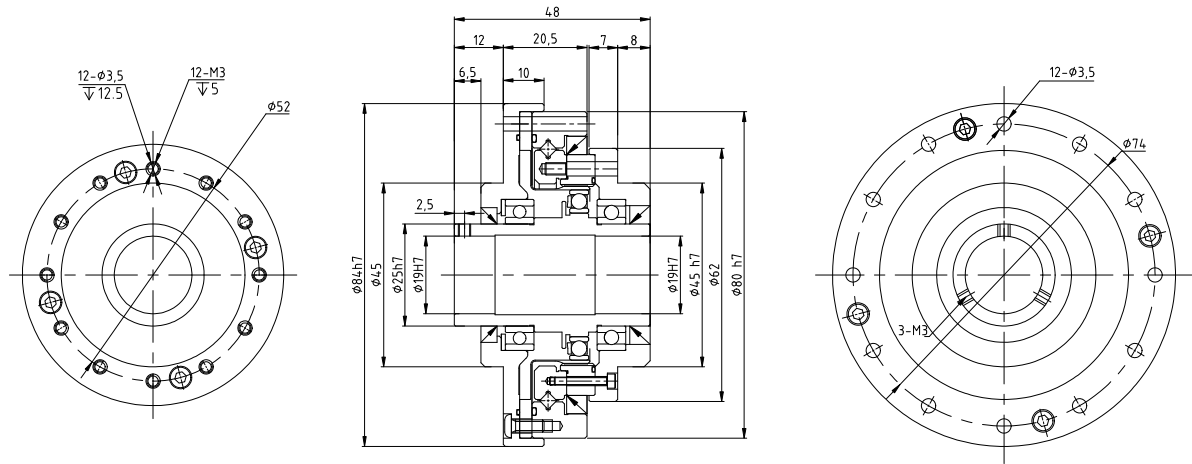


FHD-20-XX-U-III

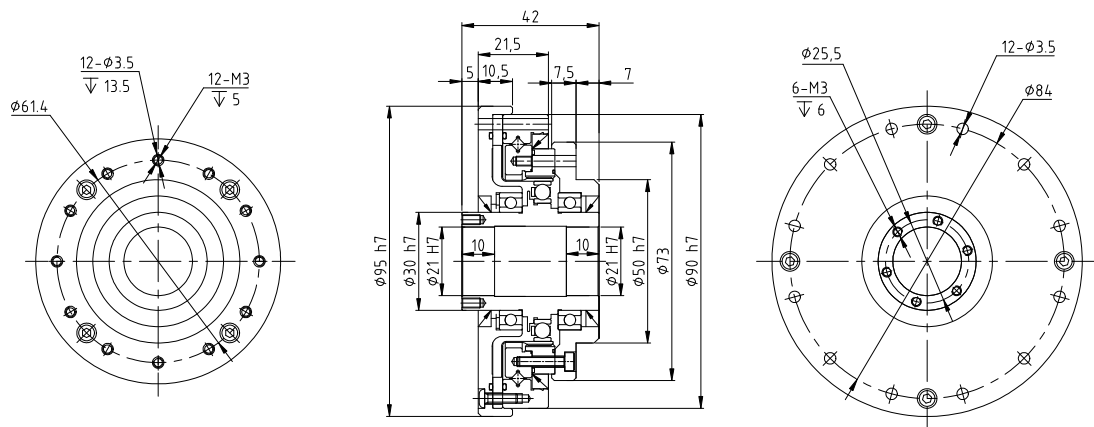


Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
17	50	11	1.1	23	2.3	18	1.8	48	4.9	7300	3500	≤ 20	0.87	9000
	80	15	1.5	29	3	19	1.9	61	6.2					10000
	100	16	1.6	37	3.8	27	2.8	71	7.2					10000
20	50	17	1.7	39	4	24	2.4	69	7	6500	3500	≤ 20	1.14	9000
	80	24	2.4	51	5.2	33	3.4	89	9.1					10000
	100	28	2.9	57	5.8	34	3.5	95	9.7					10000

OUTLINE DRAWING

FHD-25-XX-U-III

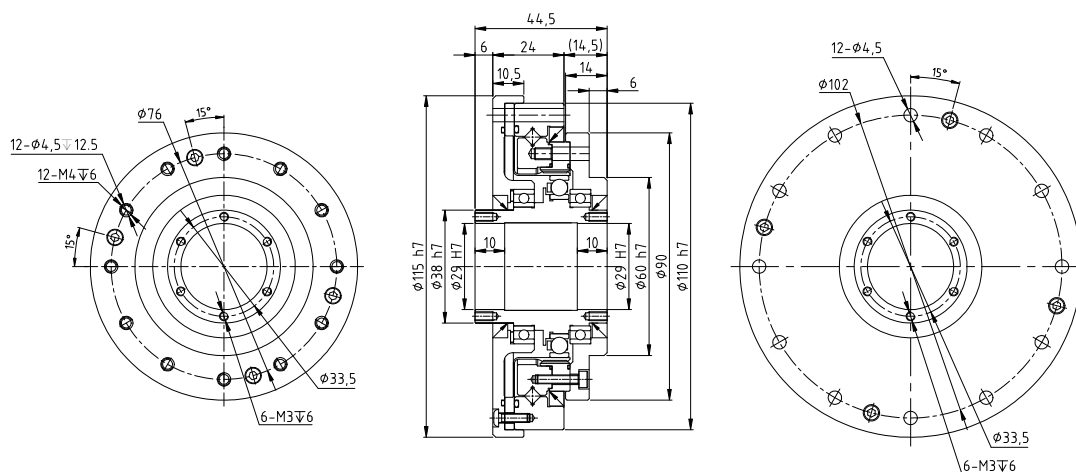

FHD-32-XX-U-III

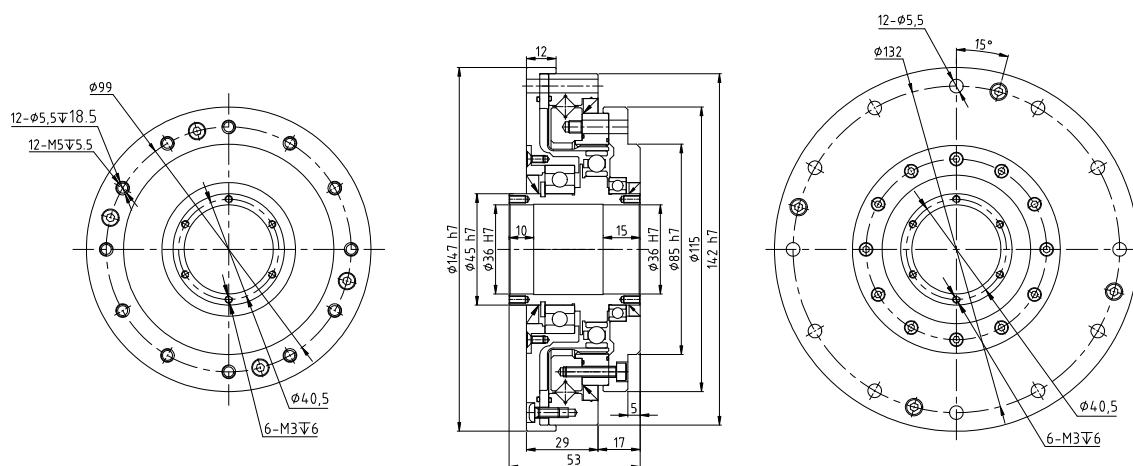

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
25	50	27	2.8	69	7	38	3.9	127	13	5600	3500	≤20	1.75	9000
	80	44	4.5	96	9.8	60	6.1	179	18					10000
	100	47	4.8	110	11	75	7.6	184	19					10000
32	50	53	5.4	151	15	75	7.6	268	27	4800	3500	≤20	3.56	9000
	80	83	8.5	213	22	117	12	398	41					10000
	100	96	9.8	233	24	151	15	420	43					10000

FHD-25-XX-U-III
FHD-32-XX-U-III

Others

WARRANTY

Regulations of warranty period and warranty scope of Laifual Drive as follows:

Warranty period

Under the condition that the products are handled, used and maintained properly, all the products are warranted against defects in workmanship and materials for the shorter period of either one year after delivery or 2,000 hours of operation time.

Warranty scope

Our company is responsible for maintenance or replacement of the product when malfunction resulting from manufacturing defect under warranty period. However, following situations are out of warranty scope.

1. Damage results from unsuitable operation or illegal use by clients.
2. Damage results from modification or repair that is not carried out by our company.
3. Damage not caused by the product.
4. Damage results from natural disaster and the like but not the responsibility of our company. What's more, the warranty mentioned here is only for our product.

The warranty terms are only valid for Laifual products.

Laifual shall not be liable for consequential damages of others equipment cause by the defective products. and shall not be liable for the incidental and consequential expenses and the labor costs for detaching and installing to the driven equipment.

TRADEMARK

The following trademarks have been registered in China

The logo for Laifual, featuring the word "Laifual" in a bold, blue, italicized sans-serif font. A small red square is positioned above the letter 'i'.


APPLICATION



Metal Working Machine



Processing Machines

Measurement, Analytical
and Test Systems

Medical Equipment



Medical Equipment



Energy



Communication Equipment

Crating and Packaging
Machines


Space Equipment



Robots



Humanoid Robots

Glass and Ceramic Manu-
facturing SystemsPrinting, Bookbinding and
PaperPrinted Circuit Board Manu-
facturing Machines

Aircraft

Semiconductor Manu-
facturing SystemsFlat Panel Display Manufac-
turing SystemsWood, Light Metal and Plas-
tic Machine Tools

Manufacturing Machine



Optical Machines

SAFE USE


Warning

Means that improper use or handling could result in a risk of death or serious injury


Caution

Means that improper use or handling could result in a risk of death or serious injury

Application restriction: This product cannot be used for the following applications:

- Space flight facility
- Aircraft equipment
- Nuclear power equipment
- Equipment and apparatus used in domestic homes
- Vacuum equipment
- Automotive equipment
- Personal recreation equipment
- Equipment that directly works on human bodies
- Equipment for transport of humans
- Equipment for use in a special environment

Please consult with our authorized distributor in advance for applications mentioned above

Fail-safe devices that prevent an accident must be designed into the equipment when the products are used in any equipment that could result in personal injury or damage to property in the event of product failure.

Design Precaution: Be certain to read the catalog when designing the equipment

 Caution	Use only in the proper environment Please ensure to comply with the following environmental conditions: • Ambient temperature 0–40°C. • No splashing of water or oil. • Do not expose to corrosive or explosive gas. • No dust such as metal powder.
 Caution	Install the equipment properly • Carry out the assembly and installation precisely as specified in the catalog. • Observe our recommended fastening methods (including bolts used and tightening torques). Improper assembly may cause problems such as vibration, reduction in life, deterioration of precision and product failure in operation.
 Caution	Use the specified lubricant • It may reduce the lifespan of the product if not using the grease by we recommend. Replace the lubricant as recommended. • The complete units are factory lubricated. Do not mix with Others kinds of grease.

Precautions for use: Be sure to read the catalog when operating

 Caution	Please take the product and parts carefully • Please do not use a hammer etc to strike all parts and assembly units forcefully. In addition, please make sure fissure and scars won't be taken place because of Filling down etc. Otherwise it will lead to damage. • The performance cannot be guaranteed when is used under the condition of damage. It might lead to failures like damage etc.
 Caution	Please do not exceed its allowable torque when used • Please do not exceed allowable maximum torque of first moment when exerting torque. Otherwise untight bolt, waggle and damage of buck-up part might be occurred which will lead to malfunction. • If output shaft is directly linked to articulated arm etc, there's a chance that it might be damaged because of collision of articulated arm, which the output shaft cannot not be controlled.
 Caution	Please do not disassemble combo products • Disassembling and reassembling the combo product are strictly prohibited. Otherwise, there is no way to regain its original performance.

Usage of lubricating grease

 Caution	Installation notes An inflammation may be caused if it splashes into eyes. Please wear protective glasses etc when operation in order to keep it from the eyes. • An inflammation may be caused if it touches the skin. Please wear protective gloves etc when operation in order to keep it from the skin. • Please do not devour (diarrhea and vomit etc will be caused) • Please note do not cut your finger when opening the container. • Please wear protective gloves well. Please keep it away from children. Treatment of waste oil and container Regulations require the user is in duty bound to carry out treatment method.
 Caution	Emergency management • Once it splashes into eyes, please wash it for 15 minutes with clean water immediately and receive treatment. • Once it touches the skin, please use the water and soap to wash it fully. • Once it's being swallowed, please do not try hard vomiting but immediately receive the doctor's treatment. Storage methods • Please seal it tight after used, in order to prevent dusts and moisture etc from mixing in. Avoid direct sunlight. • As to products with long-term inventory, make sure performance and rust protection. • For surface treatment, please refer to the delivery figure.

About scrapping

 Caution	Disposal should be carried out in accordance with the industrial waste standard. • Please process it in accordance with industrial waste when scrapping.
---	---

20250723



www.laifual.com



www.laifual.com

www.laifualdrive.com
(Overseas)

Laifual®

Head Quarter& Factory

Address: Ganlin Industrial Zone, Shengzhou, Zhejiang, China

E-mail: info@laifualdrive.com

Website: www.laifualdrive.com (Overseas)

Phone: +86-13632529084

Zhejiang Laifual Drive Co., Ltd.