
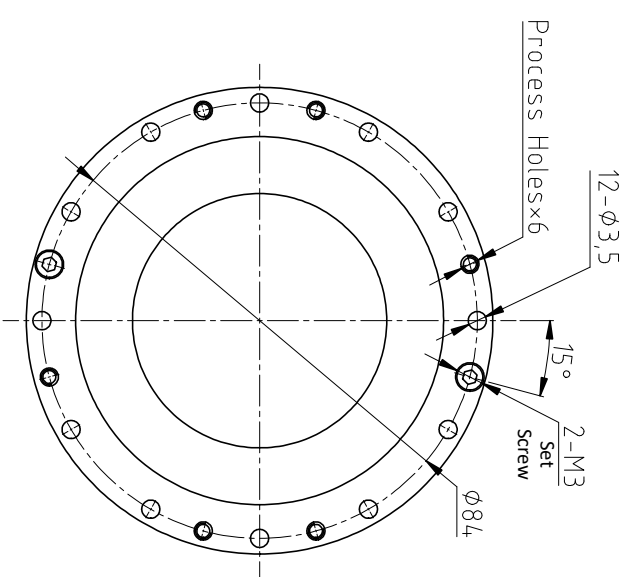
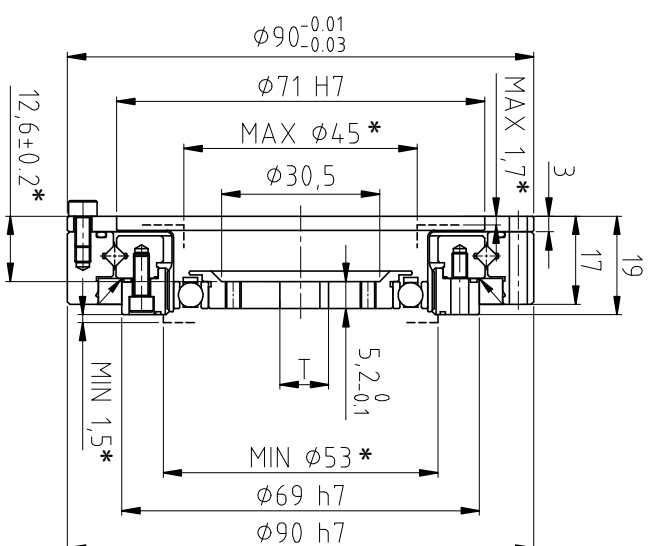


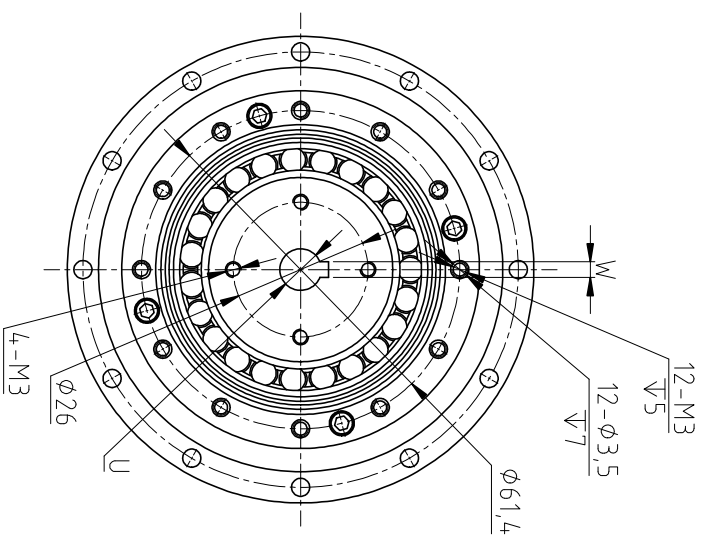

- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

Laiifuai

FHD-20-XX-U-I										Model		Reduction ratio		Rated torque at2000r/min Input		Permissible peak torque at start and stop		Permissible maximum value for average load torque		Permissible maximum momentary torque		Permissible maximum input rotational speed		Permissible average input rotational speed		Backlash		weight		Desian life							
MODEL				U		T		W				Nm		kgfm		Nm		kgfm		Nm		kgfm		r/min		r/min		Arc Sec		kg		Hour					
Wave generator-A ϕ 8				ϕ 8H7		$9,4^{+0,1}_{-0,1}$		3JS9/P9		20		50		17		1.7		39		4		24		2.4		69		7		6500		3500		$\leq$ 20		$\geq$ 9000	
												80		24		2.4		51		5.2		33		3.4		89		9.1		6500		3500		$\leq$ 20		$\geq$ 10000	
												100		28		2.9		57		5.8		34		3.5		95		9.7		6500		3500		$\leq$ 20		$\geq$ 10000	
Wave generator-A ϕ 20				ϕ 20H7		$\diagdown$		$\diagdown$																													