



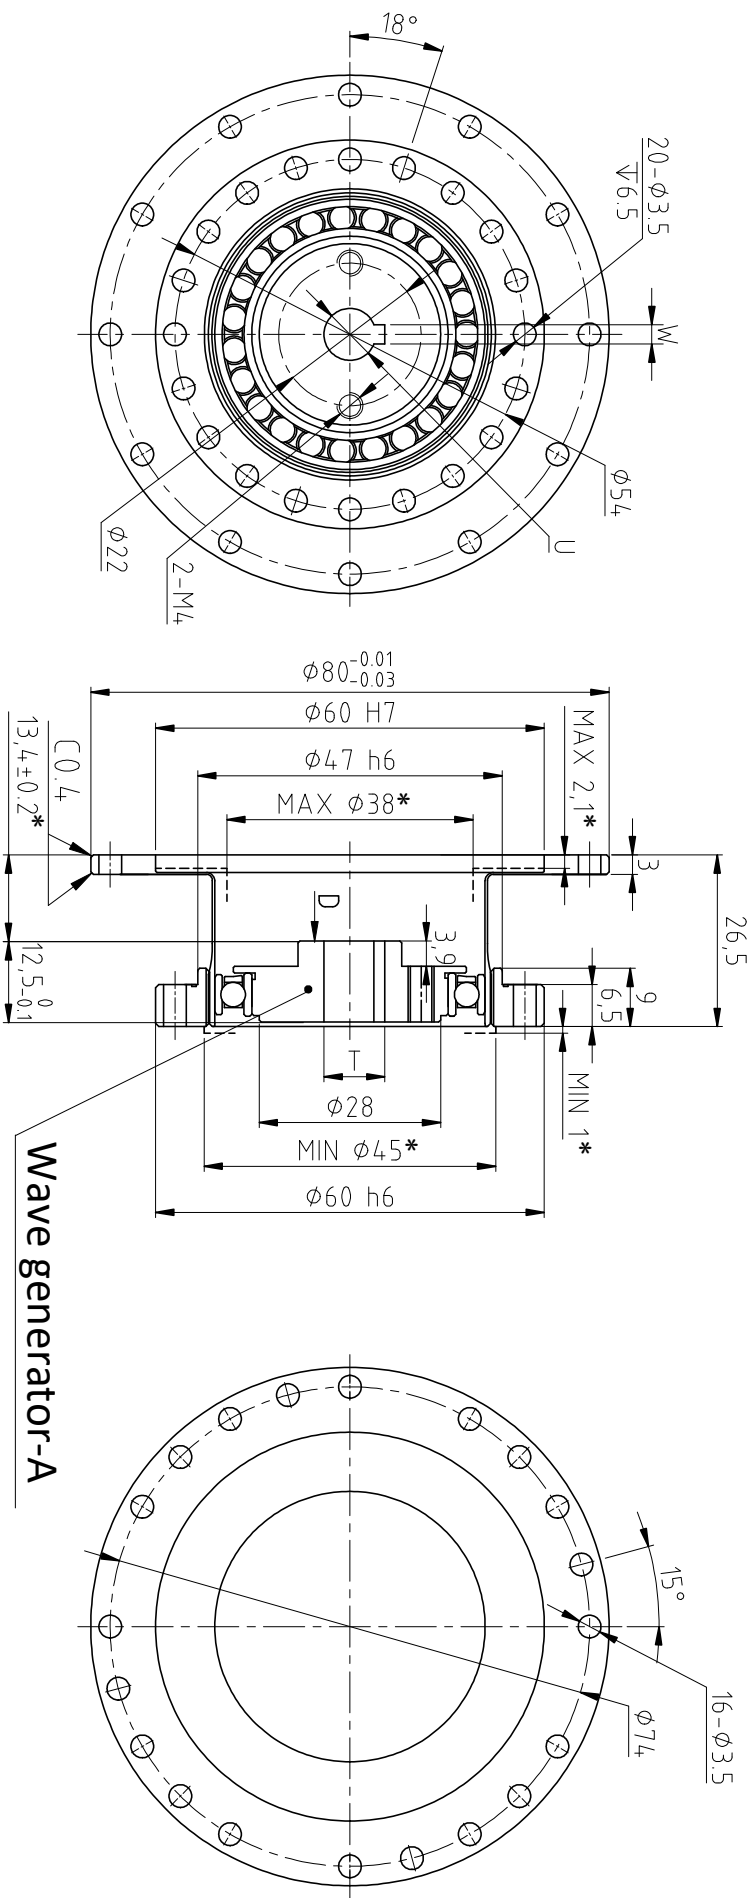

Wave generator-A

D Direction



- Technical requirements:**
1. Please use the grease specified by our company
 2. The * in the drawing is the installation reference size, please follow the installation size requirements.
 3. If the product performance parameters are not specified, please refer to the latest catalog of our company for the standard values.

FHT-17-XX-C-I				Model	Reduction ratio	Rated torque at2000r/min input	Permissible peak torque at start and stop	Permissible maximum value for average load torque	Permissible maximum momentary torque	Permissible maximum input rotational speed	Permissible average input rotational speed	Backlash	weight	Desian life				
MODEL	U	T	W	17	50	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg	Hour		
Wave generator-A φ8	φ8H7	9.4 ^{+0.1}	3JS9/P9			16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤20		≥10000
						22	2.2	43	4.4	27	2.7	87	8.9	7300	3500	≤20		≥15000
						100	2.4	54	5.5	39	4	108	11	7300	3500	≤20	FHT-C.0.19	≥15000
						120	2.4	54	5.5	39	4	86	8.8	7300	3500	≤20		≥15000
Wave generator-A φ11	φ11H7	12.8 ^{+0.1}	4JS9/P9															

Laifual